



# Mini Float Level Switch



# PRODUCT INTRODUCTION

## INTRODUCTION

The reed switch relies on two basic scientific principles namely: buoyancy and magnetism. Buoyancy causes the float (which contains a magnet) to rise with the liquid and magnetism helps open and close the switch. Since this product's this product has been introduced to the market, it has seen significant improvement and advances with regards to convenience, safety and lowering costs.

The float switches are extremely compact, simple and are easy to install on any small locations.

These switches are not affected by electrical interference and can withstand chemicals, high temperatures and pressures if the correct material of float switch is selected.


## LIQUID PROPERTIES AND FLOATS

The switch's float should always have a specific gravity (SG) less than the liquid that holds the float. (SG float < SG liquid)

When the liquid level rises the float will rise up due to its buoyancy. The float's upward movement will actuate the switch and close the circuit.

Different float materials can be used to ensure the float's SG level is less than the liquid. (Water's SG level is 1 while gasoline SG levels tend to be less than 1).


Because the float switches are activated by the magnetic field inside the float, make sure the liquid contains no iron traces or substances that can induce magnetic interference.

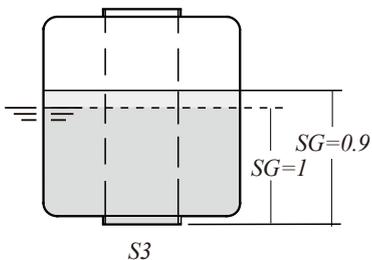

(Fig. 3)

## WORKING PRINCIPLE


Fig. 1 illustrates the pivot activation (FCH Type reed switch). When float's magnet is moved close to the switch's stationary stem, the float magnet pushes the stem's switch circuit together and closes the electrical circuit. When the float magnet is moved away from the stem, the switch circuit separates and the circuit is opened.

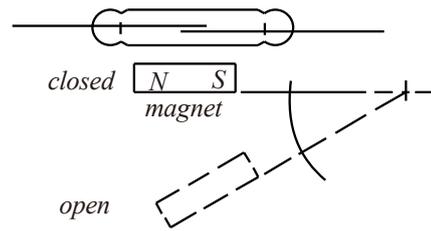

(Fig. 1)

Fig. 2 illustrates perpendicular activation (FC V TYPE float reed switches). When the liquid level rises and pushes the float up, the float's ring magnet (sealed in the float) moves close to the switch's stationary stem.

The magnet pushes the circuit together and when it makes contact, it closes the electrical circuit. When the float magnet moves away from the switch, the circuit contact is released and the switch is opened.

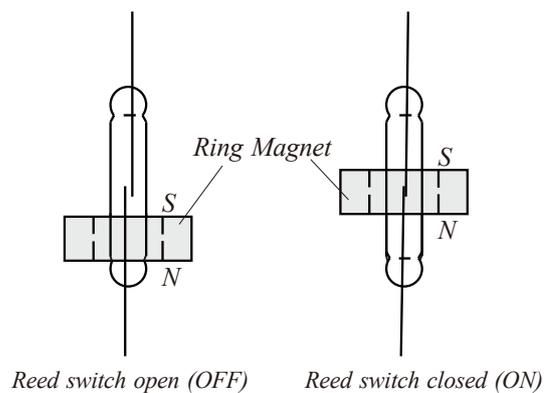

(Fig. 2)

# CHEMICAL RESISTANCE

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration %	Temp		Plastic				Rubber		Stainless	
		°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316	
Ammonia Water NH <sub>4</sub> OH	10	40	104	●	●	●	●	○			
	10	80	176		○	●	●				
Aque Regia 3HCl+HNO <sub>3</sub>	10	40	104	△	△	●	●				
	10	80	176			●	●				
Benzene C <sub>6</sub> H <sub>6</sub>	Pure	40	104	×	△	○	●				
		80	176			△	●				
Bleaching Liquor Ca(ClO) <sub>2</sub>	5	40	104	●		●	●				
	5	80	176			●	●				
	20	40	104	●		●	●				
	20	80	176			●	●				
Boric Acid H <sub>3</sub> BO <sub>3</sub>	Satu	40	104	●	●	●	●	●			
		80	176		●	●	●	○			
Brine		40	104	●	●	●	●	●			
		80	176		●	●	●				
Butadiene CH <sub>2</sub> =CH=CH=CH <sub>2</sub>	Gas	40	104	●		●	●				
		80	176			●	●				
Butane CH <sub>3</sub> (CH <sub>2</sub> ) <sub>2</sub> CH <sub>3</sub>	Gas	40	104	●	●	●	●				
		80	176		●	●	●				
Nitric Acid HNO <sub>3</sub>	10	40	104	●	●	●	●	●	●	●	
	10	80	176	×	○	●	●		●		
	30	40	104	●	●	●	●		●	●	
	30	80	176	×	○	●	●		●	●	
	50	40	104	○	○	●	●		●	●	
	50	80	176	×	×	○	●				
	70	40	104	○	×	●	●		○	●	
	70	80	176	×		○	●				
	98	40	104			○	○				
	98	80	176				△				
Oxalic Acid HOOC-COOH	20	40	104	●	●	●	●	●		△	
	20	80	176		●	●	●				
	50	40	104	●	●	●	●			△	
	50	80	176		●	●	●				
Phosphoric Acid H <sub>3</sub> PO <sub>4</sub>	10	40	104	●	●	●	●	●	●	●	
	10	80	176		○	●	●	△	●	●	
	50	40	104	●	●	●	●	●	●	●	
	50	80	176		△	●	●	×	●	●	
	80	40	104	●	●	●	●	○	●	●	
	80	80	176		△	●	●		●	●	
Sodium Hydroxide NaOH	15	40	104	●	●	●	●	●	●	●	
	15	80	176		○	△	●	△	×	×	
	30	40	104	●	●	●	●	●	●	●	
	30	80	176		○	△	●	●	×	×	
	50	40	104	●	●	○	●	●	●	●	
	50	80	176		○	×	●	●	×	×	
	70	40	104	○	○	○	●				
	70	80	176		○	×	●				

Chemical	Concentration %	Temp		Plastic				Rubber		Stainless	
		°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316	
Sodium Hypochlorite NaClO	3	40	104	●	○	●	●			△	○
	3	80	176								
	5	40	104	●	○	●	●			△	○
	5	80	176								
	7	40	104	●	△	○	●			×	×
	7	80	176								
	10	40	104	●	△	●	●			×	×
10	80	176									
13	40	104	●	△	●	●			×	×	
13	80	176									
Sulfuric Acid H <sub>2</sub> SO <sub>4</sub>	10	40	104	●	●	●	●	●	●	●	●
	10	80	176		●	●	●	○	○	○	
	30	40	104	●	●	●	●	●	×	×	
	30	80	176		●	●	●	○	×	×	
	50	40	104	●	●	●	●	○	×	×	
	50	80	176		●	●	●	△	×	×	
	60	40	104	●	●	●	●	●	×	×	
	60	80	176		○	●	●	○	×	×	
	70	40	104	●	●	●	●	○	×	×	
	70	80	176		○	●	●	△	×	×	
80	40	104	●	●	●	●	●	×	×		
80	80	176		○	●	●	△				
90	40	104	○	●	●	●	△	×	×		
90	80	176		○	●	●	△				
98	40	104	△		●	○		○	○		
98	80	176			△	○					
Toluene C <sub>6</sub> H <sub>5</sub> CH <sub>3</sub>		40	104		△	△	●				
		80	176				○				
Chlorine Gas Cl <sub>2</sub>	Wet	40	104	○		●	●				
	Wet	80	176			△	●				
	Dry	40	104	●		●	●				
	Dry	80	176			●	●				
Chromic Acid H <sub>2</sub> CrO <sub>4</sub>	10	40	104	●		●	●				
	10	80	176			●	●				
	20	40	104	△		●	●				
	20	80	176			●	●				
	40	40	104	△		●	●				
	40	80	176			●	●				
	50	40	104	×		●	●				
	50	80	176			△	●				
Hydrochloric Acid HCl	15	40	104	●	●	●	●	○			
	15	80	176		●	●	●				
	25	40	104	●	●	●	●	×			
	25	80	176		●	●	●				
	35	40	104	●	●	●	●	×			
	35	80	176		○	●	●				
	38	40	104	●	●	●	●	×			
	38	80	176		○	●	○				

● Excellent ○ Good △ Fair × Corroded

Chemical	Concentration %	Temp		Plastic				Rubber	Stainless	
		°C	°F	PVC	PP	PVDF	PTFE	NBR	304	316
Citric Acid $C_6H_8O_7$	10	40	104	●	●	●	●	●	●	●
	10	80	176		○	●	●	●		
Gasoline	10	40	104	●		●	●			
	10	80	176			●	●			
Diesel Fuels		40	104			●	●		●	●
		80	176			●	●		●	●
Ethyl Alcohol $C_2H_5OH$	Pure	40	104	●	●	●	●	●	○	○
		80	176		○	●	●	○		
Formic Acid $HCOOH$	90	40	104	○	○	●	●			
		80	176			●	●			
Hydrofluoric Acid HF	Dilute	40	104	●	○	●	●			
		80	176		○	●	●			
	30	40	104	○	○	●	●			
		80	176	×	○	●	●			
	40	40	104	△	○	●	●			
		80	176		○	●	●			
	50	40	104	△	○	●	●			
		80	176		○	●	●			
Hydrogen peroxide $H_2O_2$	5	40	104	●	●	●	●		○	●
	5	80	176		○	●	●			
	20	40	104	●	●	●	●			
		80	176		○	●	●			
	30	40	104	○	○	●	●			
		80	176		△	●	●			
	50	40	104	△	×	●	●			
		80	176			●	●			
	90	40	104			●	●			
		80	176			●	●			
Isopropyl Alcohol $(CH_3)_2CHOH$	Pure	40	104	●	●	●	●	○		
		80	176			●	●			
Kerosene		40	104	●	○	●	●			
		80	176			●	●			
Methyl Alcohol $CH_3OH$		40	104	○	●	●	●	△		
		80	176		○	●	●			
Methyl Ethyl Ketone $CH_3COC_2H_5$		40	104		△		●			
		80	176				●			
Potassium Chromate $K_2CrO_4$		40	104	●	●	●	●	●		
		80	176		○	●	●	○		

# REED SWITCH PROTECTION

## INDUCTIVE LOADS

When using reed switches for inductive loads such as motors, relay coil, solenoids, etc., the contact points will sometimes be subjected to high voltages. Such high induced voltages may damage the reed switch or significantly reduce its life.

Therefore, circuit protectors such as: RC snubbers, varistors or clamping diodes are recommended. (see Fig. 4a, Fig. 4b, Fig. 4c)

- Do not directly connect the solenoid valve, motor or magnetic switch.

$$C = \frac{L^2}{10} \text{ (uF)}$$

$$R = \frac{E}{10I(1 + \frac{E}{50})}$$

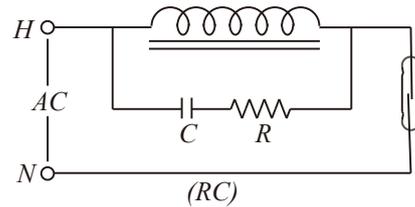


Fig. 4 (a)

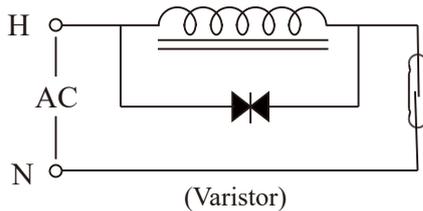


Fig. 4 (b)

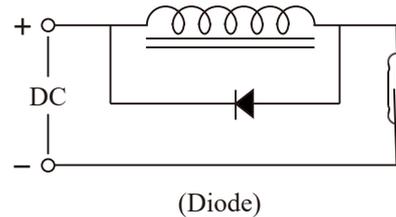


Fig. 4 (c)

## ■ CAPACITIVE LOADS

When using reed switches for capacitive loads such as capacitors, incandescent lamps or long cables, the contact points will be subjected to electrical surges. Therefore, protective circuits such as: surge suppressors or current limiting resistors are recommended. (Fig. 5a, Fig. 5b)

Therefore, circuit protectors such as: RC snubbers, varistors or clamping diodes are recommended (Fig. 5a, Fig. 5b)




Fig. 5 (a)






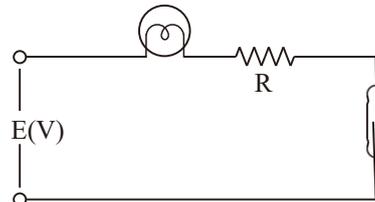


Fig. 5 (b)


# FLOAT SPECIFICATIONS

MODEL	TYPE	$\phi A \times B \times \phi C$	S.G.	Max. Pressure (kg/cm <sup>2</sup> )	Weight (g)	Material/Color	Max. Temp. (LC <input checked="" type="checkbox"/> )
	S1	28x28x9.5	E>0.7	10	8	SUS 316 / 316L	200
	S3	45x55x15	E>0.65	12	37.6	SUS 316	200
	S6	75x108x20	E>0.5	10	165	SUS 316	200
	S13	38x50x15	E>0.62	12	22.9	SUS 316L	200
	S2	41x38x11	E>0.7	35	19.5	SUS 316	200
	S4	52x52x15	E>0.55	30	33.4	SUS 316	200
	S5	75x73x20	E>0.70	30	102.4	SUS 316	200
	S7	30x28x9.5	E>0.75	25	8	SUS 316 / 316L	200
	S8	100x100x20	E>0.5	15	249.7	SUS 304	200
	S9	150x150x30	E>0.45	15	534	SUS 304	200
	S10	30x32x9.5	E>0.75	50	8.6	SUS 316	200
	S11	28x32x9.5	E>0.82	30	8.1	SUS 316	200
	P1	25x15x10	E>0.65	4	3.5	PP / white black	80
	P2	25x25x10	E>0.7	4	5	PP / white black	80
	P3	48x45x18.5	E>0.6	5	35.5	PP / black	80
	P4	20x25x10	E>0.7	4	3.7	PP / black	80
	P5	20x20x8.1	E>0.75	4	4	PP / black	80
	P8	18.2x15.3x7.2	E>0.8	4	1.82	PP / black	80
	Q6	20x20x7.5	E>0.75	ATM	3.5	PP / white	80
	Q7	25x25x8.8	E>0.7	ATM	6.7	PP / white	80
	N1	25x15x10	E>0.5	ATM	2.7	NBR / black	100
	N2	18.5x26x10	E>0.7	ATM	3.3	NBR / black	100
	N4	17.5x25x10	E>0.65	ATM	2.5	NBR / black	100
	N5	30x45x12.8	E>0.5	ATM	11.5	NBR / black	100
	F2	42x44x14	E>0.45	5	18.5	PP	80
	F3	45x45x20	E>0.65	5	35.7	PP	80
	F4	48x62x18	E>0.8	5	65.3	PVDF	120


# STAINLESS STEEL SWITCHES




▶ **FD MH50 / 56**

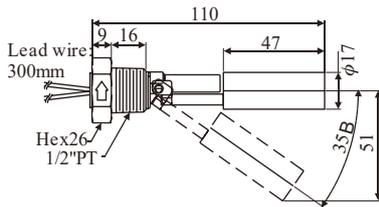


▶ **FD MH50A / 56A**

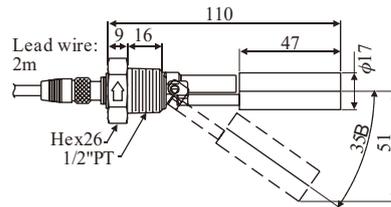


▶ **FD MH50C / 56C**

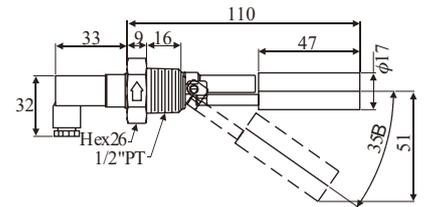


▶ **FD MH60 / 66**

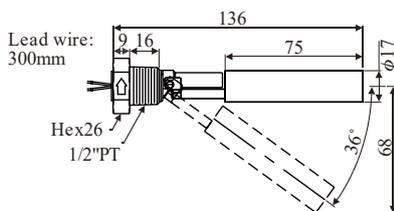

▶ **FD MH60A / 66A**

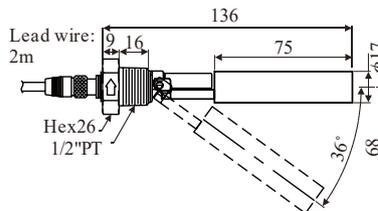

▶ **FD MH60C / 66C**

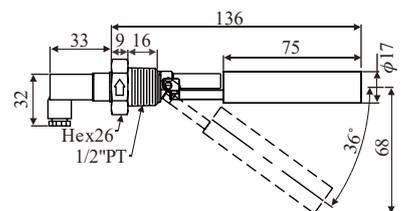

## SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
<b>FDMH50/56</b> <b>FDMH60/66</b>	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE or TEFLON	5 kg/cm <sup>2</sup>	-20~120°C (Max.200°C)	FDMH5:0.92 FDMH6:0.75
<b>FDMH50A/56A</b> <b>FDMH60A/66A</b>	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	PVC or PUR	5 kg/cm <sup>2</sup>	80°C	FDMH5:0.92 FDMH6:0.75
<b>FDMH50C/56C</b> <b>FDMH60C/66C</b>	SUS 304 SUS 316L	50W/SPST	240Vac 200Vdc	0.5A	1A	NA	5 kg/cm <sup>2</sup>	-20~120°C	FDMH5:0.92 FDMH6:0.75



# ORDER INFORMATION (STAINLESS STEEL SWITCHES)

FDM 1 0 0 <sup>07</sup> <sup>08</sup> - <sup>09</sup> <sup>10</sup> <sup>11</sup> <sup>12</sup> <sup>13</sup> <sup>14</sup> <sup>15</sup> <sup>16</sup> <sup>17</sup> <sup>18</sup> <sup>19</sup> <sup>20</sup> <sup>21</sup> <sup>22</sup> <sup>23</sup>

**07 08 Certification**

00: None  
3A: UL

**09 10 Type**

05:  $\phi$ 17x47L (SG: 0.92)  
06:  $\phi$ 17x75L (SG: 0.75)

**11 12 Material**

MA: SUS 304  
MB: SUS 316  
MC: SUS316L

**13 Wiring**

A: M12  
B: DIN  
C: Cable wire type 1

**14 15 16 17 Connection**

A503: 1/2"PF  
A501: 1/2"PT  
A507: 1/2"NPT  
A505: 1/2"BSP

**18 19 20 Material of Lead wire**

000: None  
210: Teflon(200BC AWG24)  
220: PUR(For M12)  
250: Silicon(150BC AWG24 Cable)  
291: XLPE(125BC AWG22)

※The wires are made of Teflon, and only the wires can withstand temperatures up to 200°C.  
※The product must be temperature-resistant to 200°C and needs to be customized.  
High-temperature type must be specified in the order notes.


**21 22 23 Lead wire Length**

001: 100mm	008: 800mm
002: 200mm	009: 900mm
003: 300mm	010: 1000mm
004: 400mm	020: 2000mm
005: 500mm	100: 10m
006: 600mm	000: None
007: 700mm	


※Connector M12 whose standard wire length is 2m ,5m,10m,15m

# MARINE LEVEL SWITCHES


## ► FDMRN5A0B

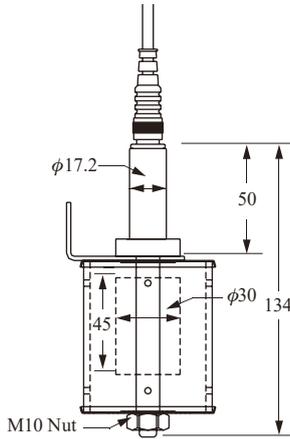


## ► FDMRN5B0B

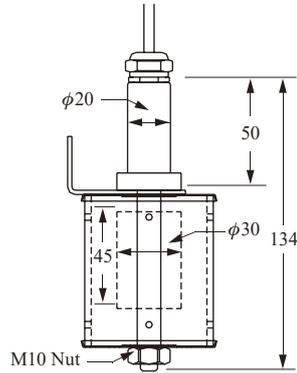

## ► FDMRN5C0B

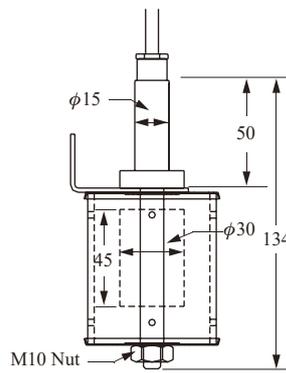

## ► FDMRN5D0B

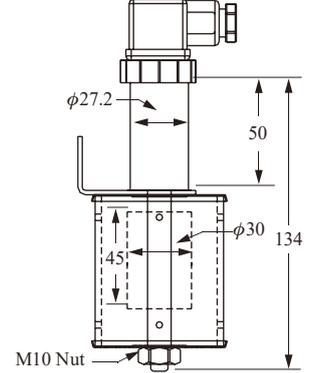


## SPECIFICATIONS


Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMRN5A0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	M12, 2 meter	ATM	Max. 80°C	0.5
FDMRN5B0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	PVC, 22 AWG	ATM	Max. 80°C	0.5
FDMRN5C0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	Silicon	ATM	Max. 100°C	0.5
FDMRN5D0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	DIN 43650	ATM	Max. 80°C	0.5

# MARINE LEVEL SWITCHES


## ► FDMRN8A0B

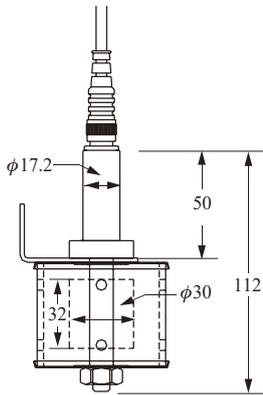


## ► FDMRN8B0B



## ► FDMRN8C0B






## ► FDMRN8D0B



## SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.
FDMRN8A0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	M12, 2 meter	ATM	Max. 80°C	0.7
FDMRN8B0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	PVC,22 AWG	ATM	Max. 80°C	0.7
FDMRN8C0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	Silicon	ATM	Max. 100°C	0.7
FDMRN8D0B	SUS 304 (Float:NBR)	50W/SPST	240Vac 200Vdc	0.5A	1A	DIN 43650	ATM	Max. 80°C	0.7

## FDB-0450 PARTS OF SLOSH SHIELD



# HOW TO ORDER MARINE LEVEL SWITCHES


▶ FDMRN5A

▶ FDMRN5B


▶ FDMRN5C

▶ FDMRN5D


▶ FDMRN8C

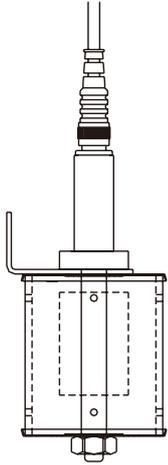


A TYPE

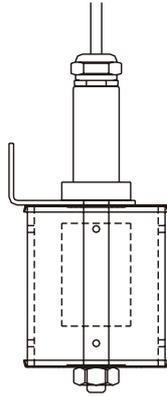


B TYPE

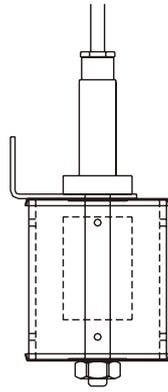

C TYPE

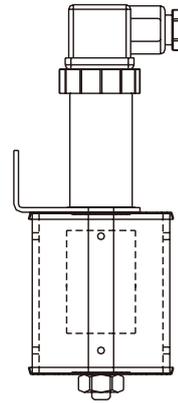

D TYPE



C TYPE



# ORDER INFORMATION (MARINE LEVEL SWITCHES)

FDM 2 0 0 <sup>07</sup> <sup>08</sup> <sup>09</sup> <sup>10</sup> <sup>11</sup> <sup>12</sup> <sup>13</sup> <sup>14</sup> <sup>15</sup> <sup>16</sup> <sup>17</sup> <sup>18</sup> <sup>19</sup> <sup>20</sup>  
  -

**07 08 Certification**

00:None

**09 10 The material of the float**

N5:  $\phi$ 30x45L (NBR)  
 N8:  $\phi$ 30x32L (NBR)

**11 12 The material of the probe**

MA: SUS 304  
 MC: SUS 316L

**13 Wiring**

A: M12  
 B: DIN  
 C: Cable wire type 1 (B type)  
 D: Cable wire type 2 (C Type)

**14 Contact type**

A: NO  
 B: NC

**15 16 17 Material of Lead wire**


000: None  
 220: PUR (for M12)  
 231: PVC (80°C AWG22 Cable)  
 250: Silicon (150°C AWG24 Cable)

**18 19 20 Lead wire Length**

001: 100mm	008: 800mm
002: 200mm	009: 900mm
003: 300mm	010: 1000mm
004: 400mm	020: 2000mm
005: 500mm	100: 10m
006: 600mm	000: None
007: 700mm	


# STAINLESS STEEL MODELS

## ► FD 30□1/ FD 35□1

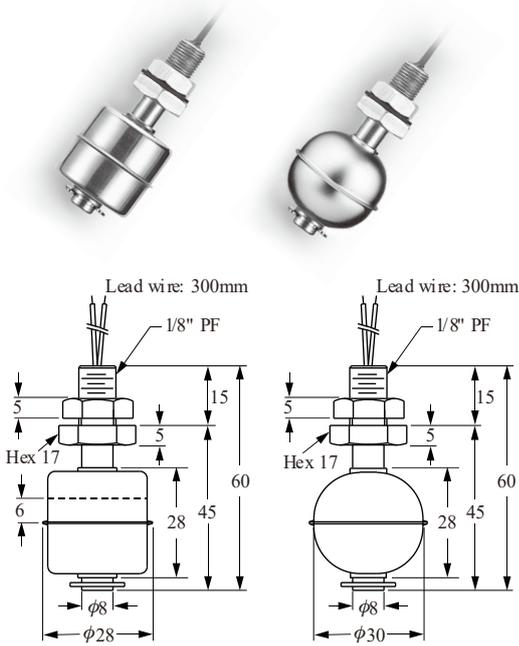


**RU** Washer: NBR  
Drill hole  $\phi 10\text{mm}$

## ► FD 40□1

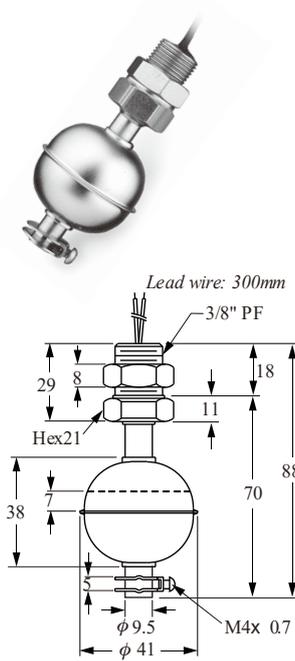


**RU** Washer: NBR  
Drill hole  $\phi 17\text{mm}$

## ► FD 45□1

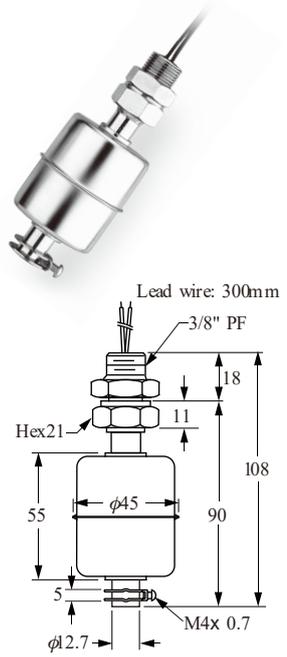


**RU** Washer: NBR  
Drill hole  $\phi 17\text{mm}$

## ► FD 30□2

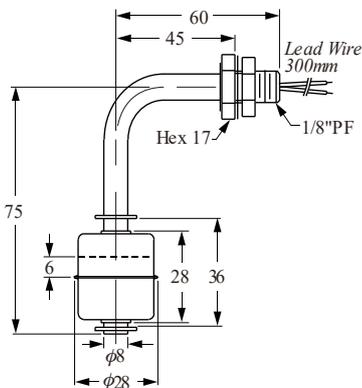


**RU** Washer: NBR  
Drill hole  $\phi 10\text{mm}$

## ► FD 40□2

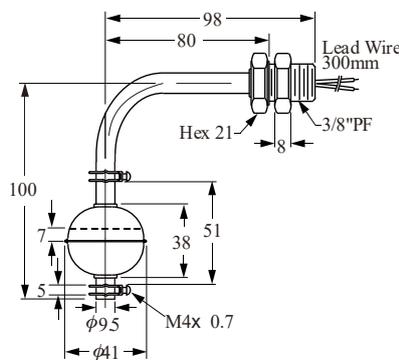

**RU** Washer: NBR  
Drill hole  $\phi 17\text{mm}$


## ► FD 45□2

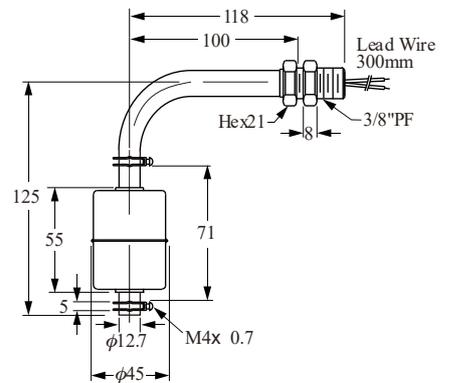

**RU** Washer: NBR  
Drill hole  $\phi 17\text{mm}$

# METAL TYPES


## ▶ FD 50□1

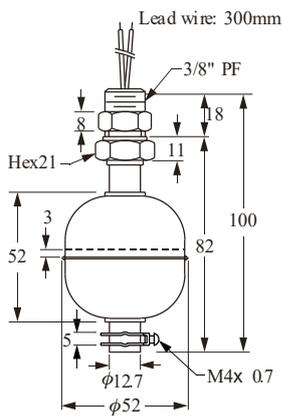

Washer: NBR  
Drill hole φ17mm




## ▶ FD 50□2

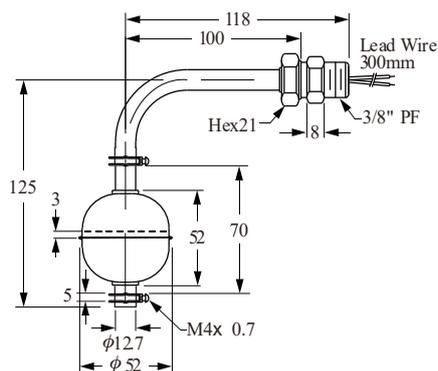

Washer: NBR  
Drill hole φ17mm



## ▶ FD 75□1

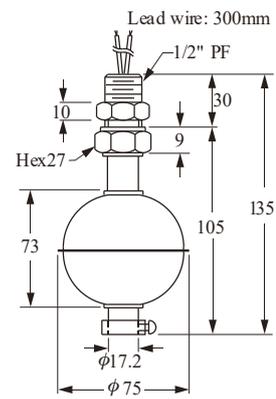

Washer: NBR  
Drill hole φ21mm



## SPECIFICATIONS

Description \ Type	FD30□1D FD30□2D	FD40□1D FD40□2D	FD45□1D FD45□2D	FD50□1D FD50□2D	FD75□1D	FD10□1D
<b>Material</b>	Stainless Steel SUS304, 316					
<b>Switching Capacity Max.</b>	50W SPST	50W SPST	50W SPST	50W SPST	50W SPST	
<b>Switching Voltage Max.</b>	240Vac/200Vdc				220Vac	
<b>Switching Current Max. (A)</b>	0.5A	0.5A	0.5A	0.5A	1A	
<b>Carry Current Max. (A)</b>	1A	1A	1A	1A	2A	
<b>Lead Wire</b>	XLPE (UL3266, AWG22)					
<b>Reversible Switch Action</b>	YES / below 80°C, NO / UP 80°C				NO	NO
<b>Max. Pressure (Kg/cm<sup>2</sup>)</b>	10	30	12	30	30	10
<b>Operating Temperature</b>	-20~120°C (OPTION 200°C)					
<b>Suitable Specific Gravity</b>	0.7	0.7	0.65	0.55	0.65	0.5



# ORDER INFORMATION (STAINLESS STEEL SWITCHES)

FDM 3     -

⑤⑥ **Model**  
 00: Standard  
 02: Hi-temperature

⑦⑧ **Certification**  
 00: None  
 3A: UL

⑨⑩ **Type**

10: $\phi$ 75x108, 1/2"PF	35: $\phi$ 30x28, 1/8"PF	45: $\phi$ 45x55, 3/8"PF
30: $\phi$ 28x28, 1/8"PF	36: $\phi$ 30x28, 1/8"NPT	50: $\phi$ 52x52, 3/8"PF
31: $\phi$ 28x28, 1/8"NPT	40: $\phi$ 41x38, 3/8"PF	75: $\phi$ 75x73, 1/2"PF

⑪⑫ **Probe material**  
 MA: SUS 304  
 MB: SUS 316

⑬ **Mounting**  
 V: Top or Bottom Mounting  
 H: Side Mounting

⑭ **Switching Capacity Max.**  
 D: 50W 240VAC/200VDC SPST  
 F: 10W 125VAC SPST  
 K: 20W 150VAC/200VDC SPDT

⑮ **Contact Mode**

A: SPST, Normal Open	D: Normal Closed Reversible
B: SPST, Normal Closed	E: Normal Open Reversible
C: SPDT	

⑯⑰⑱ **Material of Lead wire**

210: Teflon (200°C AWG24)	250: Silicon (150BC AWG24 Cable)
230: PVC (80°C AWG22)	291: XLPE (125BC AWG22)
231: PVC (80°C AWG22 Cable)	300: XLPVC (105BC AWG24)
232: PVC (80°C AWG24 Cable)	


⑲⑳㉑ **Lead wire Length**

001: 100mm	005: 500mm	009: 900mm
002: 200mm	006: 600mm	010: 1000mm
003: 300mm	007: 700mm	020: 2000mm
004: 400mm	008: 800mm	100: 10m

# STAINLESS STEEL MODELS (EX-PROOF TYPE)

TS Ex mb IIB T6 Gb 

► FDM3005C-30□□V ► FDM3005C-30□□H ► FDM3005C-35□□V ► FDM3005C-35□□H

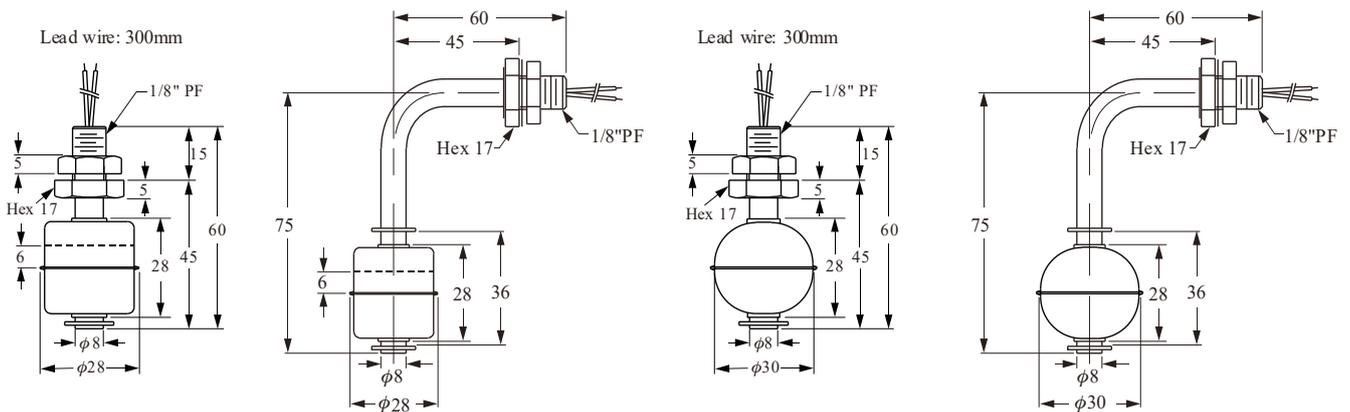

Washer: NBR  
Drill hole  $\phi$ 10mm

Washer: NBR  
Drill hole  $\phi$ 10mm

## SPECIFICATIONS

(Utilizing special glue which is graded for Ex-proof to seal sensing components perfectly)

Type	FDM3005C-30□□V FDM3005C-30□□H FDM3005C-31□□V FDM3005C-31□□H	FDM3005C-35□□V FDM3005C-35□□H FDM3005C-36□□V FDM3005C-36□□H
Description		
Switching Capacity Max.	45W SPST	
Switching Voltage Max.	240Vac/200Vdc	
Switching Current Max. (A)	0.5A	
Lead Wire	XLPE (UL3266, AWG22)	
Reversible Switch Action	YES	
Max. Pressure (Kg/cm <sup>2</sup> )	10	25
Operating Temperature	-20 ~65°C	
Material	SUS304, 316, 316L	
Suitable Specific Gravity	0.7	0.75

# ORDER INFORMATION (EX-PROOF TYPE)

FDM 3 ⑤⑥⑦⑧⑨⑩⑪⑫⑬⑭⑮⑯⑰⑱⑳  
    -

**⑤ ⑥ Model**

00: Standard

**⑦ ⑧ Certification**

5C: TS-Ex d

**⑨ ⑩ Type**

- 30:  $\phi$ 28x28, 1/8"PF
- 31:  $\phi$ 28x28, 1/8"NPT
- 35:  $\phi$ 30x28, 1/8"PF
- 36:  $\phi$ 30x28, 1/8"NPT

**⑪ ⑫ Probe material**

- MA: SUS 304
- MB: SUS 316
- MC: SUS 316L

**⑬ Mounting**

- V: Top or Bottom Mounting
- H: Side Mounting

**⑭ Contact Mode**

- A: SPST, Normal Open
- B: SPST, Normal Closed
- D: Normal Closed Reversible
- E: Normal Open Reversible

**⑮ ⑯ ⑰ Material of Lead wire**


- 210: Teflon (200°C AWG24)
- 231: PVC (80°C AWG22 Cable)
- 232: PVC (80°C AWG24 Cable)
- 291: XLPE (125°C AWG22)
- 300: XLPVC (105°C AWG24)

**⑱ ⑲ ⑳ Lead wire Length**



- |            |            |             |
|------------|------------|-------------|
| 001: 100mm | 005: 500mm | 009: 900mm  |
| 002: 200mm | 006: 600mm | 010: 1000mm |
| 003: 300mm | 007: 700mm | 020: 2000mm |
| 004: 400mm | 008: 800mm | 100: 10m    |

# PLASTIC OH MODELS

## ► F CH11QD

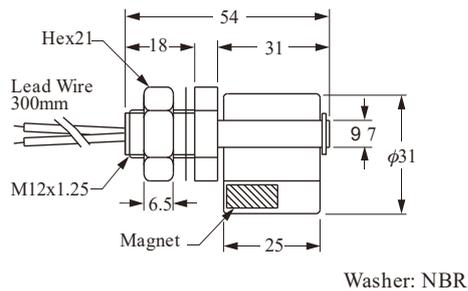

## ■ Installation / N.C./ N.O. Action Position

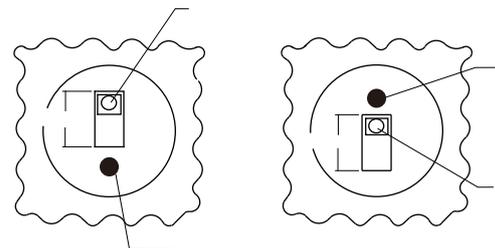

- All the products in this range come with .
- All the products in this range are designed to be side mounted.
- Water's specific gravity is used as the reference point for calculations.

## ■ SPECIFICATIONS

Description \ Type	F CH11QD	F CH21PD F CH31PD	F CH23FD F CH33FD	F CH25GD F CH35GD
Switching Capacity Max.	50W SPST			
Switching Voltage Max.	240VAC / 200Vdc			
Switching Current Max. (A)	0.5A			
Carry Current Max. (A)	1A			
Lead Wire	PVC AWG22	XLPE AWG22		
Max. Pressure (Kg/cm <sup>2</sup> )	ATM	4 kg/cm <sup>2</sup>	2 kg/cm <sup>2</sup>	
Operating Temperature	-20~80°C		-20~120°C	
Material	PP		PVDF	Polysulfone
Suitable Specific Gravity	0.6	0.65	0.85	0.85
Weight	25 g	H21: 22 g H31: 21 g	25 g	25.4 g


# PLASTIC OH MODELS

## ► F CH21PD / F CH31PD



- F CH2 and F CH3 models have certification.
- F CH2 and F CH3 models are available in PP and PVDF.
- Special lead wire/cable are available on request.
- Different reed switches are available for selection.
- OEM designs are welcome.


### ■ Optional F CH21PDO(Round)

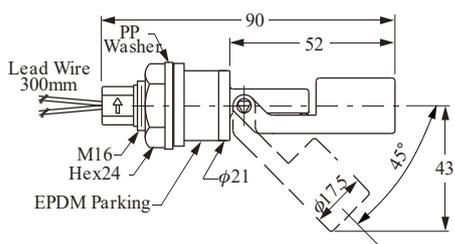


### ■ Installation / N.C. / N.O. Action Position

#### [ External mounting ]

Arrow Downward  
Normally Closed

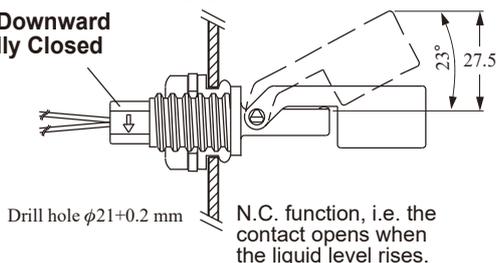


### ■ Standard F CH21PDD (Hexagon)

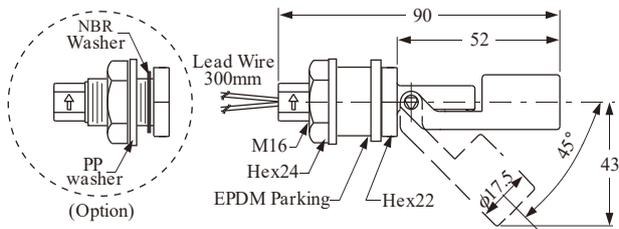


#### [ Internal mounting ]


Arrow Upward  
Normally Open

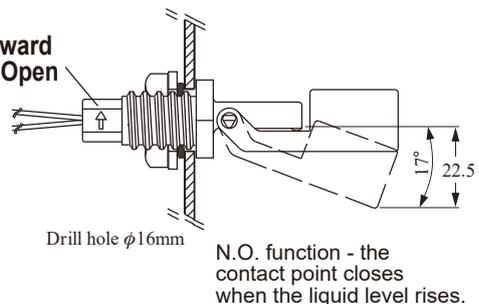

### ■ F CH31PD

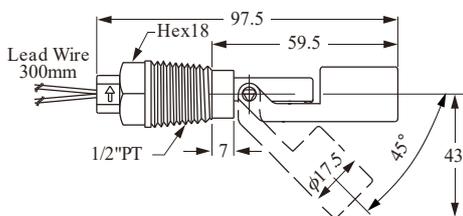

#### [ External mounting ]

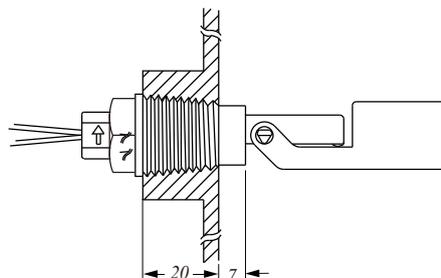


# PLASTIC OH MODELS



## ► F CH41PD / H51PD



## ■ Installation / N.C. / N.O. Action Position


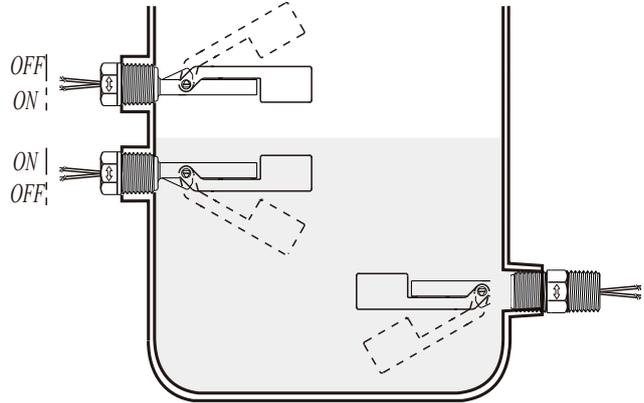


## ■ F CH41PD

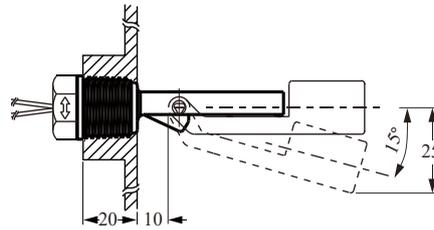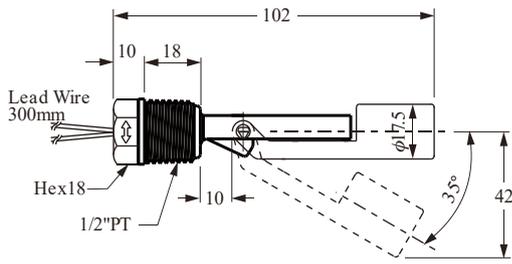

N.O. function, i.e. the contact closes when the liquid level rises.

## ■ F CH51PD

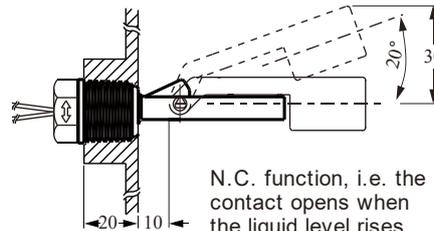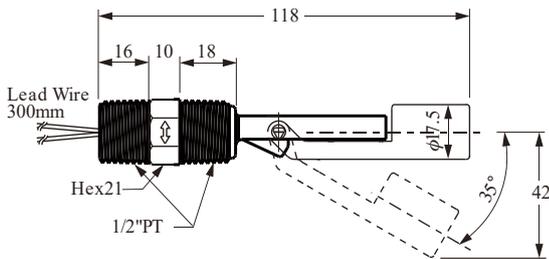

N.C. function, i.e. the contact opens when the liquid level rises.

\*FCH4 and F CH5 models have  certification.

## SPECIFICATIONS

Type	Material	Switching Capacity Max.	Switching Voltage Max.	Switching Current Max.	Carry Current Max.	Lead Wire	Max. Pressure	Operating Temp.	Suitable Sp. Gr.	Weight
F CH41PD F CH51PD	PP	50W/SPST	240Vac 200Vdc	0.5A	1A	XLPE	4 kg/cm <sup>2</sup>	-20~80°C	0.55	20g 25g

► F CV11QF




► F CV21QD




► F CV31PD




► F CV33FD, F CV35GD

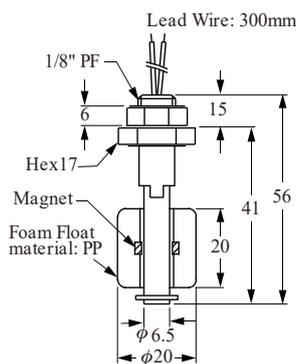


Washer: NBR  
Drill holøφ10mm

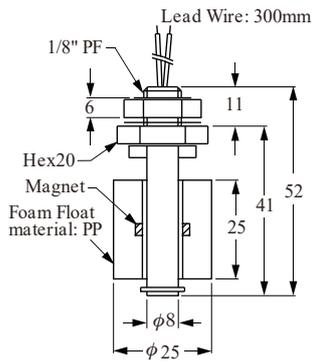

Washer: NBR  
Drill holøφ10mm

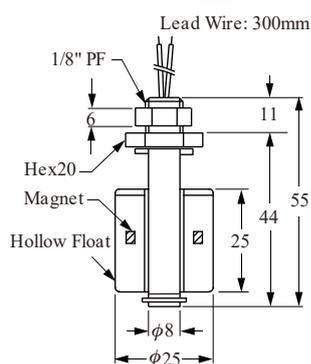

O-ring: VITON  
Drill holøφ10mm

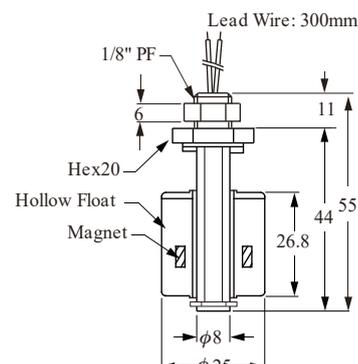

O-ring: VITON  
Drill holøφ10mm


\*FCV1 /FCV2 /FCV3 models have  certification.

**SPECIFICATIONS**


Description \ Type	F CV11QF	F CV21QD	F CV31PD	F CV33FD	F CV35GD
Switching Capacity Max.	10W SPST	50W SPST	50W SPST		
Switching Voltage Max.	125Vac	240Vac / 200Vdc	240Vac / 200Vdc		
Switching Current Max. (A)	0.5A		0.5A		
Carry Current Max. (A)	1A		1A		
Lead Wire	UL 1007 AWG22 PVC		UL 1007 AWG22 PVC	XLPE AWG22	
Reversible Switch Action	YES	NO	YES/ 80°C down		
Max. Pressure (Kg/cm <sup>2</sup> )	ATM		4 kg/cm <sup>2</sup>	2 kg/cm <sup>2</sup>	
Operating Temperature	-20~80°C		-20~80°C	-20~120°C	
Material	PP		PP	PVDF	Polysulfone
Suitable Specific Gravity	0.75	0.7	0.7	0.85	0.85
Weight (g)	12 g	18 g	12.8 g	18 g	18 g

# PLASTIC OV MODELS


## ► F CV41PD

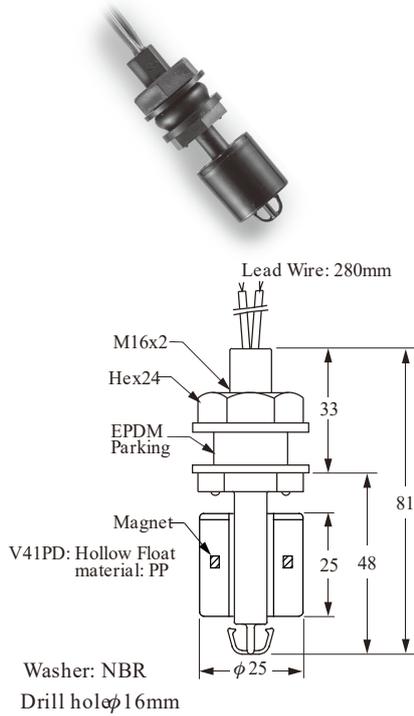


## ► F CV61PF, F CV61NF

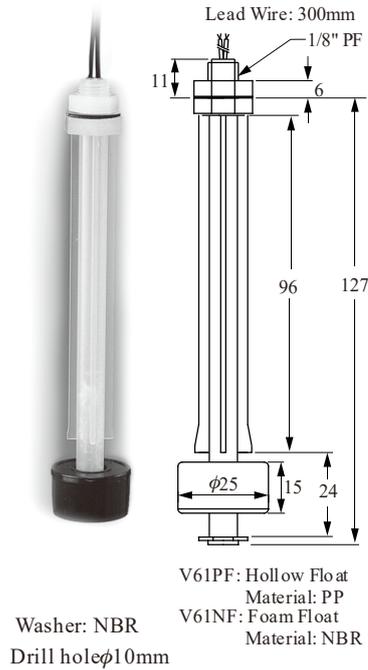


## ► F CV81PD

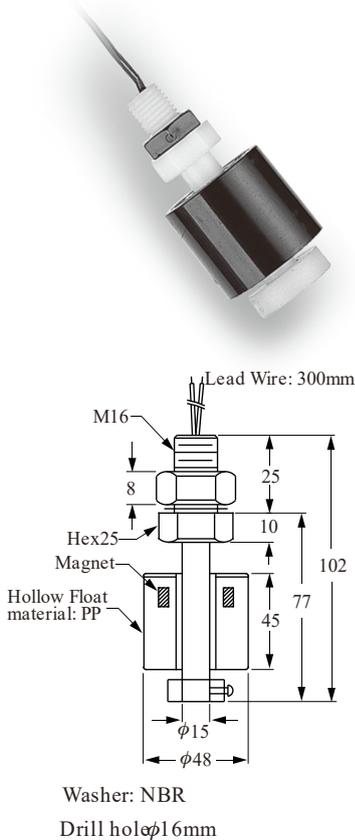

## ► F CV41ND

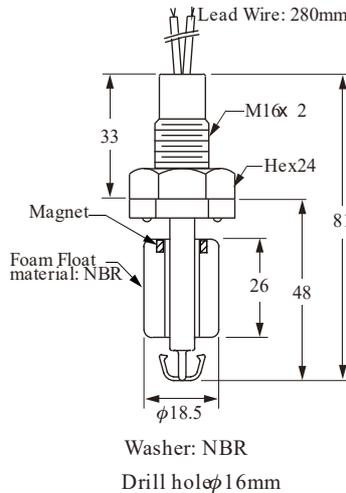

## ► F CV51PD

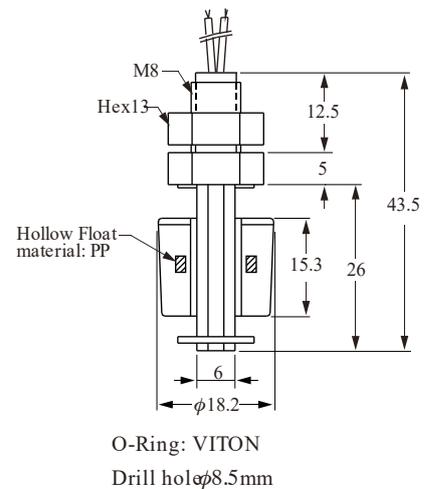


\*FCV4 /FCV5 /FCV6 /FCV8 models have  certification.

# PLASTIC OV MODELS

## SPECIFICATIONS

Description \ Type	F CV61PF F CV61NF	F CV41PD	F CV81PD	F CV41ND	F CV51PD
Switching Capacity Max.	10W SPST	50W SPST			
Switching Voltage Max.	125Vac (Break Down 250Vac)	240Vac / 200Vdc			
Switching Current Max. (A)	0.5A				
Carry Current Max. (A)	1A				
Lead Wire	UL 1007 AWG22 PVC				
Reversible Switch Action	NO	YES	NO	NO	NO
Max. Pressure (kg/cm <sup>2</sup> )	V61P: 4kg/cm <sup>2</sup> V61N: ATM	4kg/cm <sup>2</sup>	4 kg/cm <sup>2</sup>	ATM	4 kg/cm <sup>2</sup>
Operating Temperature	-20~80°C				80°C
Material	PP (except V61N, V41N: NBR float)				
Suitable Specific Gravity	0.65 0.5	0.55	0.6	0.7	0.8
Weight (g)	16 g	23 g	180 g	17 g	8.2 g

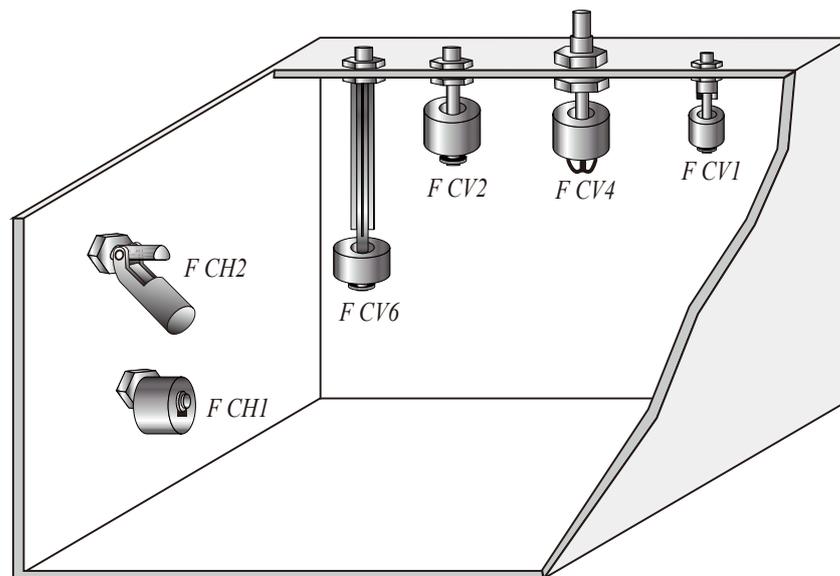

## MODEL / NUMBER ORDER CODE COMPARISON TABLE

Model Number	Order Code
FCH11QD	FCM10000-H1181DD
FCH21PD	FCM10000-H2180D
FCH31PD	FCM10000-H3180DD
FCH23FD	FCM10000-H2240D
FCH33FD	FCM10000-H3240DD
FCH25GD	FCM10000-H2
FCH35GD	FCM10000-H3
F H41PD	FCM10000-H4180DD
FCH51PD	FCM10000-H5180DD

FCV11QF	FCM10000-V1181F
FCV21QD	FCM10000-V2181D
FCV31PD	FCM10000-V3180D
FCV33FD	FCM10000-V3240D
FCV35GD	FCM10000-V3
FCV61PF	FCM10000-V6180F
FCV61NF	FCM10000-V6070F
FCV41PD	FCM10000-V4180D
FCV81PD	FCM10000-V8180D
FCV41ND	FCM10000-V4070D
FCV51PD	FCM10000-V5180D

# ORDER INFORMATION (PLASTIC MODELS)

FCM 1 0 0 <sup>07</sup> <sup>08</sup> - <sup>09</sup> <sup>10</sup> <sup>11</sup> <sup>12</sup> <sup>13</sup> <sup>14</sup> <sup>15</sup> <sup>16</sup> <sup>17</sup> <sup>18</sup> <sup>19</sup> <sup>20</sup> <sup>21</sup>

**⑦⑧ Certification**

00: None  
3A: UL

**⑨ Mounting**

V: Top or bottom mounting  
H: Side mounting

**⑩ Type**

1: Type 1	4: Type 4	7: Type 7
2: Type 2	5: Type 5	8: Type 8
3: Type 3	6: Type 6	

**⑪⑫⑬ Material of Wetted parts**

070: NBR(Float), PP(Floating pole)  
180: PP(Hollow float), PP(Floating pole)  
181: PP(Foam float), PP(Floating pole)  
240: PVDF(Float), PVDF(Floating pole)

**⑭ Switching Capacity Max.**

D: 50W 240VAC/200VDC SPST  
F: 10W 125VAC SPST  
K: 20W 150VAC/200VDC SPDT

**⑮ Contact Mode**

A: SPST, Normal Open  
B: SPST, Normal Closed  
D: Normal Closed Reversible  
E: Normal Open Reversible  
C: SPDT

※Side mounted types(FCH2,3,4,5) are only available with D mode.  
NO or NC depends on the installation direction.

**⑯⑰⑱ Material of Lead wire**

210: Teflon (200°C AWG24)	234: PVC(80°C AWG18)
230: PVC (80°C AWG22 )	250: Silicon(150°C AWG24 Cable)
231: PVC (80°C AWG22 Cable)	290: XLPE (125°C AWG22)
232: PVC (80°C AWG24)	300: XLPVC (105°C AWG24)
233: PVC (80°C AWG24 Cable)	

**⑲⑳㉑ Lead wire Length**

001: 100mm	003: 300mm	005: 500mm	008: 800mm	010: 1000mm
002: 200mm	004: 400mm	006: 600mm	009: 900mm	020: 2000mm

# CUSTOMIZED PLASTIC MODELS


► FC PV1




► FC PV2




► FC PV3

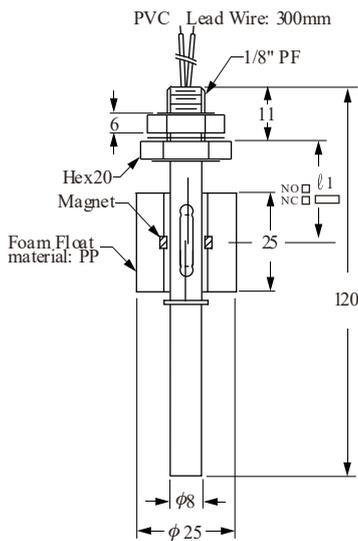

O-Ring: VITON

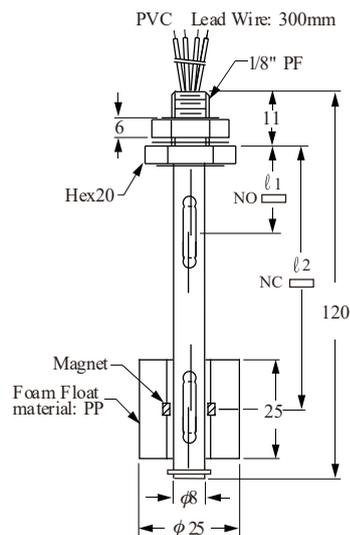

O-Ring: VITON

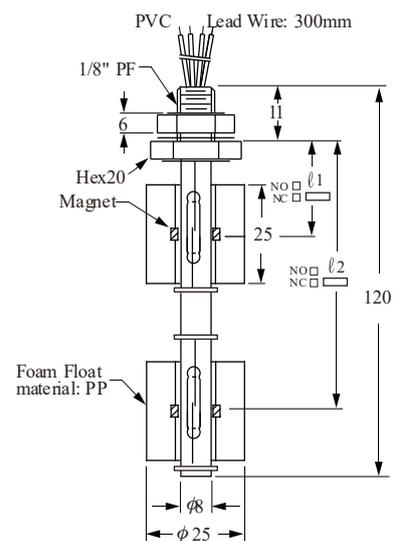

O-Ring: VITON

- NOTE: Float material's are optional.  
The above items are custom-built when client demands are unique. The benefits are listed below:

- FCPV1 One float for one level activation.
- FCPV2 One float with 2 reed switches.
- Applicable for conditions where 1 float can actuate switches at high and low levels.

- FCPV3 Two floats actuate two independent reed switches: Each float unit's default setting can be either N.O. or N.C. as per cus



# ORDER INFORMATION (PLASTIC MODELS)

FCM 2 0 0 <sup>07</sup> <sup>08</sup> - <sup>09</sup> <sup>10</sup> <sup>11</sup> <sup>12</sup> <sup>13</sup> <sup>14</sup> <sup>15</sup> <sup>16</sup> <sup>17</sup> <sup>18</sup> <sup>19</sup> <sup>20</sup>

**07 08 Certification**

00: None

**09 10 Mounting**

V1: Single float single switch  
 V2: Single float dual switch  
 V3: Dual float dual switch

**11 12 Probe material**

07: NBR Float, PP(Floating pole)  
 18: PP Float  
 24: PVDF, PP(Floating pole)

**13 Switching Capacity Max.**

D: 50W 240VAC/200VDC SPST  
 F: 10W 125VAC SPST  
 K: 20W 150VAC/200VDC SPDT

**14 Contact Mode**

A: SPST, Normal Open  
 B: SPST, Normal Closed  
 C: SPDT  
 H: Double reed switch 1-NO ,1-NC

**15 16 17 Material of Lead wire**

000: None  
 230: PVC (80°C AWG22)  
 231: PVC (80°C AWG22 Cable)  
 232: PVC(80°C AWG24 Cable) When 2 floats  
 291: XLPE (125°C AWG22)

**18 19 20 Lead wire Length**


001: 100mm	006: 600mm
002: 200mm	008: 800mm
003: 300mm	009: 900mm
004: 400mm	010: 1000mm
005: 500mm	020: 2000mm

# CUSTOMIZED STAINLESS STEEL MODELS


Items below are custom-built models for special applications or placement on existing facilities. Their unique characteristics are as follows:

- Any size measuring range, but  $\phi 8\text{mm}$  stem  
Max. 500mm.
- Customized mounting thread specifications are acceptable.
- Single or multiple contact points are workable.
- S witch activation N.O. or N.C. choices are available.


► FDSA□11

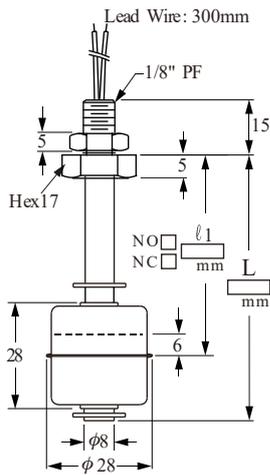


► FDSB□11

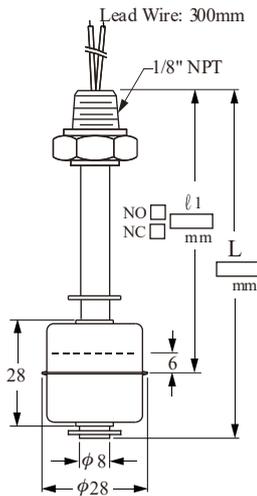


► FDSC□11

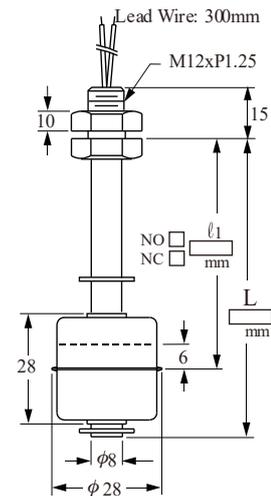


► FDSA□12

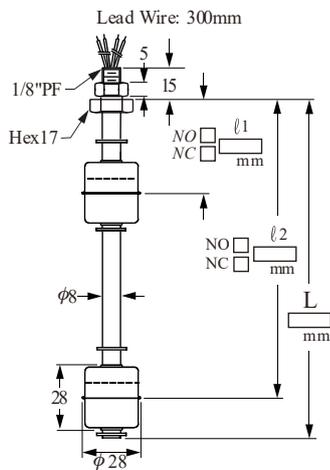

► FDSA□21

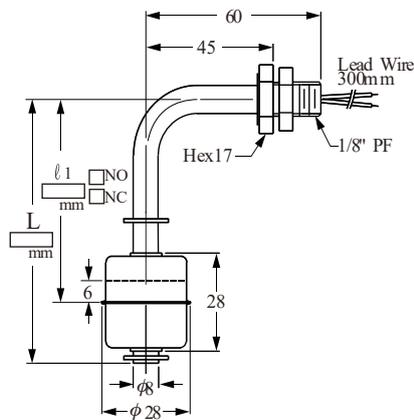

► FDSA□22

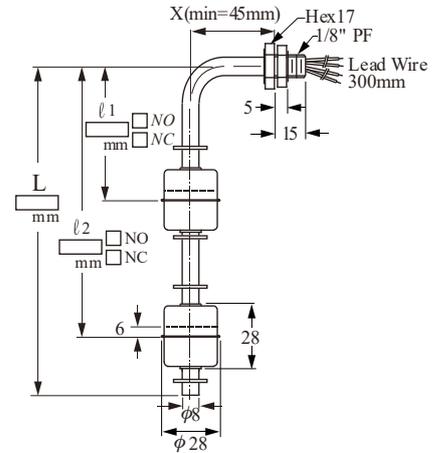


# CUSTOMIZED STAINLESS STEEL MODELS

Items below are custom-built models for special application and location on existing equipment facilities. Their unique characteristics are as follows:


- Any size measurement range available.

- Customized mounting thread specification are acceptable.
- Single or multiple contact form (point) are workable.
- Switch activation N.O. or N.C. are available.


► **FDSD□11**

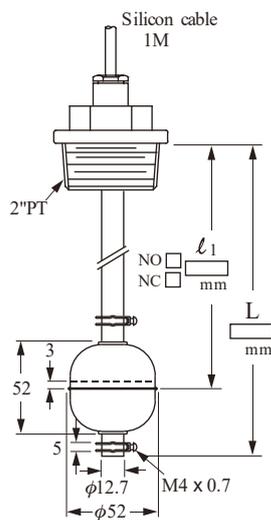


► **FDSE□11**

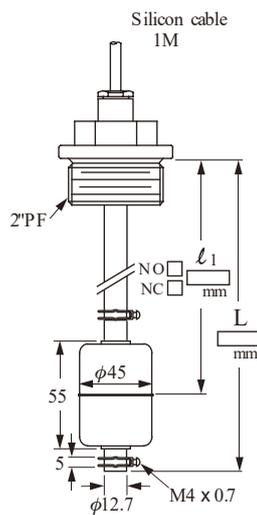


► **FDSF□11**

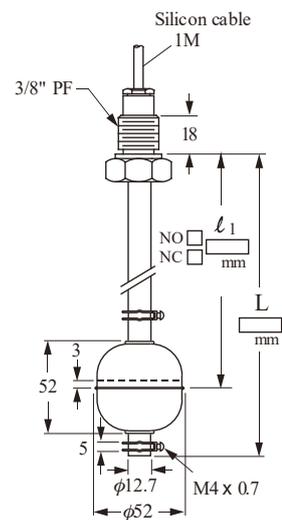


► **FD4503D**

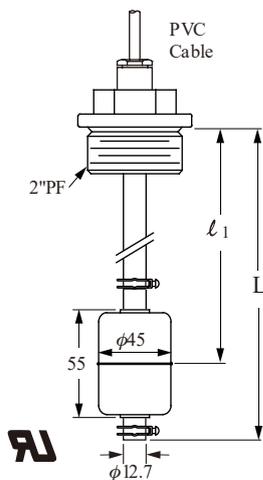

► **FD5003G**

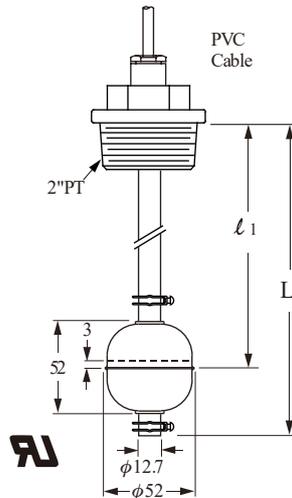

► **FD7503G**

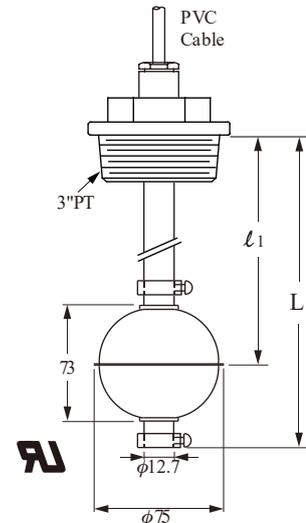



# ORDER INFORMATION (CUSTOMIZED STAINLESS STEEL MODELS)

FDM 4 0 0 07 08 - 09 10 11 12 13 14 15 16 17 18 19 20 21 22

**07 08 Certification**

00: None  
3A: UL

**09 10 Type**

SA: Float $\phi$ 28x28, 1/8"PF	SE: Float $\phi$ 45x55, 2"PF
SB: Float $\phi$ 28x28, 1/8"NPT	SF: Float $\phi$ 52x52, 3/8"PF
SC: Float $\phi$ 28x28, M12	SG: Float $\phi$ 75x73, 3"PT
SD: Float $\phi$ 52x52, 2"PT	

**11 12 Probe material**

MA: SUS304  
MB: SUS316

**13 Mounting**

V: Top or Bottom Mounting  
H: Side Mount

**14 Float Number**

1: 1 Float  
2: 2 Floats

**15 Switching Capacity Max.**

D: 50W 240VAC/200VDC SPST  
K: 20W 150VAC/200VDC SPDT(Only SA、SB、SC)  
G: 60W 220VAC SPDT( $\geq 12.7$ mm Diameter)(Only SD、SE、SF)  
F: 10W 1250VAC SPST(Only SA)

**16 Contact Mode**

A: NO(Only D)  
B: NC(Only D)  
C: SPDT(Only G)  
H: 1 NO, 1NC(Dual read switch)(Only D)  
K: 20W 150VAC/200VDC SPDT(Only K)

**17 18 19 Material of Lead wire**



210: Teflon (200°C AWG24)  
250: Silicon(150°C AWG24 Cable)  
291: XLPE (125°C AWG22)  
230: PVC (80°C AWG22)  
231: PVC(80°C AWG22 Cable)

**20 21 22 Lead wire Length**



001: 100mm	003: 300mm	005: 500mm	008: 800mm	010: 1000mm
002: 200mm	004: 400mm	006: 600mm	009: 900mm	020: 2000mm

# TYPICAL WIRING DIAGRAMS



\* AUTO SUPPLY CASE:  
SINGLE FLOAT DUAL SWITCHES

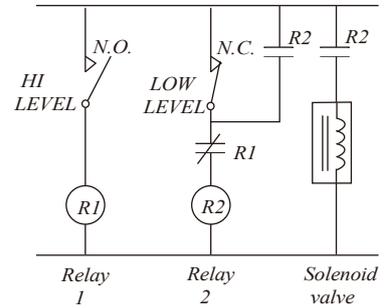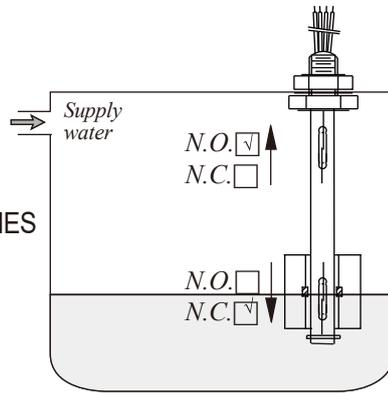



\* AUTO DRAIN CASE:  
SINGLE FLOAT DUAL SWITCHES

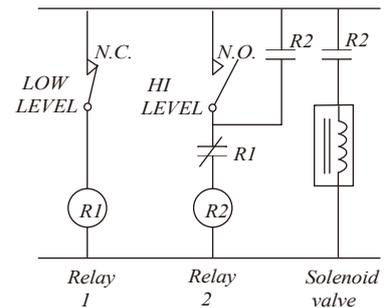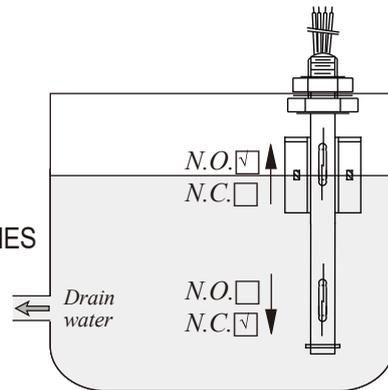


\* AUTO SUPPLY CASE:  
DUAL FLOATS DUAL SWITCHES

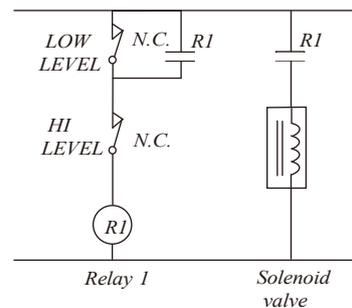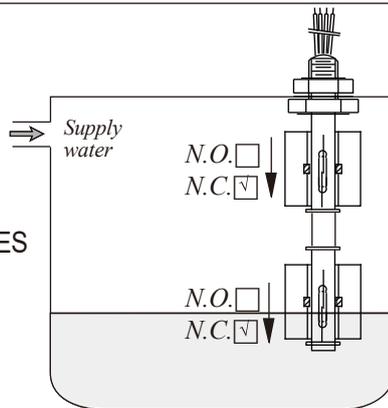

\* AUTO DRAIN CASE:  
DUAL FLOATS DUAL SWITCHES

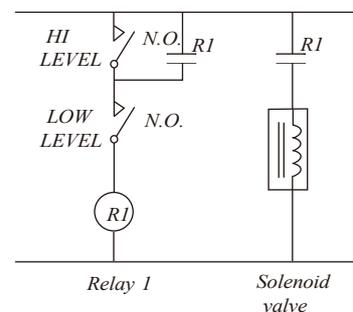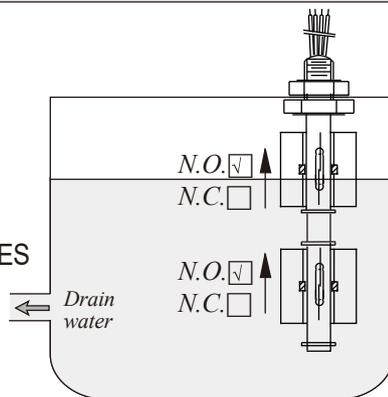

# Global Network

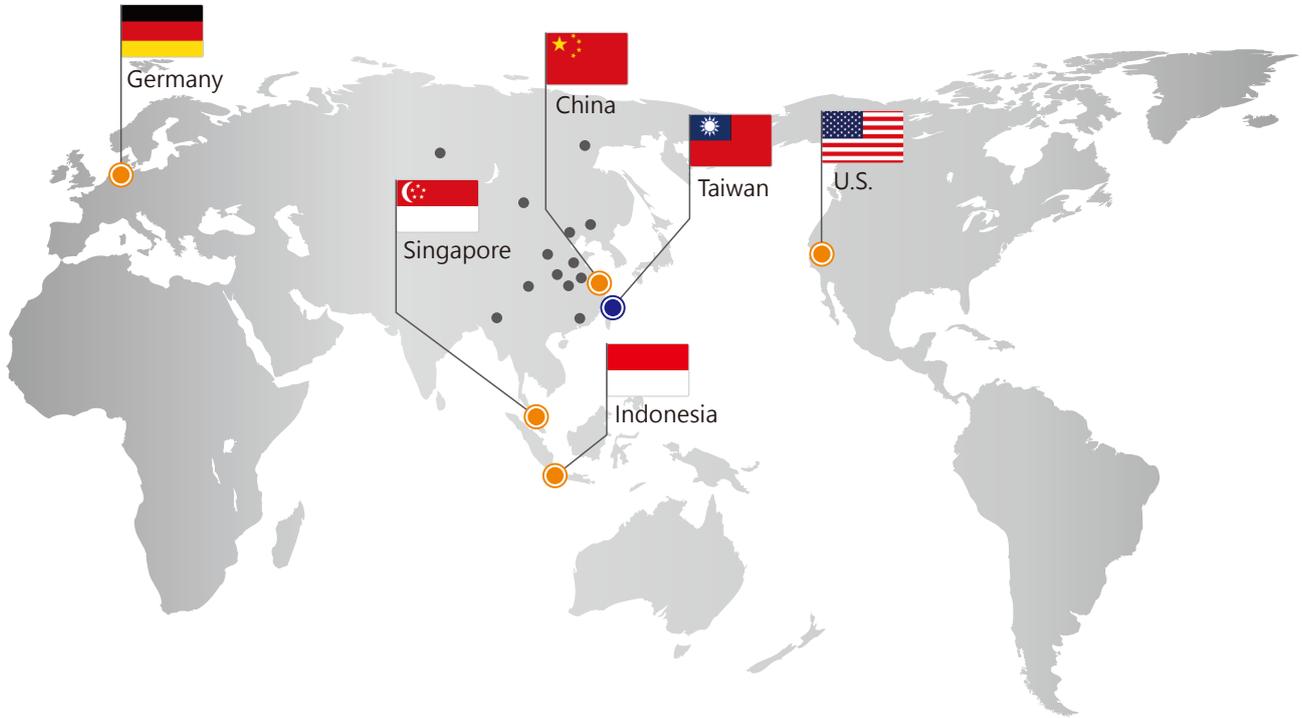

## ■ Head Quarter

- Taiwan  
FineTek Co., Ltd. - Taipei Head Quarter  
No.16, Tzuchiang St., Tucheng Industrial Park  
New Taipei City 236, Taiwan  
TEL: 886-2-2269-6789  
FAX: 886-2-2268-6682  
EMAIL: info@fine-tek.com

## ■ North America

- California, U.S.  
Aplus Finetek Sensor Inc. - US Office  
355 S. Lemon Ave, Suite D  
Walnut, CA 91789  
TEL: 1 909 598 2488  
FAX: 1 909 598 3188  
EMAIL: info@aplusfine.com

## ■ Europe

- Germany  
FineTek GmbH - Germany Office  
Bei den Kämpfen 26  
21220 Seevetal-Ramelsloh, Germany  
TEL: +49-(0)4185-8083-12  
FAX: +49-(0)4185-8083-80  
EMAIL: info@fine-tek.de

## ■ Asia

- China  
Fine automation Co., Ltd. - Shanghai Factory  
No.451 DuHui Rd, MinHang District, Shanghai,  
China 201109  
TEL: 86-21-6490-7260  
EMAIL: info.sh@fine-tek.com

- Singapore  
FineTek Pte Ltd. - Singapore Office  
37 Kaki Bukit Place, Level 4 Singapore 416215  
TEL: 65-6452-6340  
EMAIL: info.sg@fine-tek.com

- Indonesia  
PT. FineTek Automation Indonesia - Indonesia Office  
PERGUDANGAN TUNAS BITUNG  
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15,  
Bitung Cikupa, Tangerang 15710  
TEL: 62 (021)-2958-1688  
EMAIL: info.id@fine-tek.com

- Mütec Instruments GmbH - Germany Office  
Bei den Kämpfen 26  
21220 Seevetal-Ramelsloh, Germany  
TEL: +49-(0)4185-8083-0  
FAX: +49-(0)4185-8083-80  
EMAIL: muetec@muetec.de



Distributor: