


Global Network

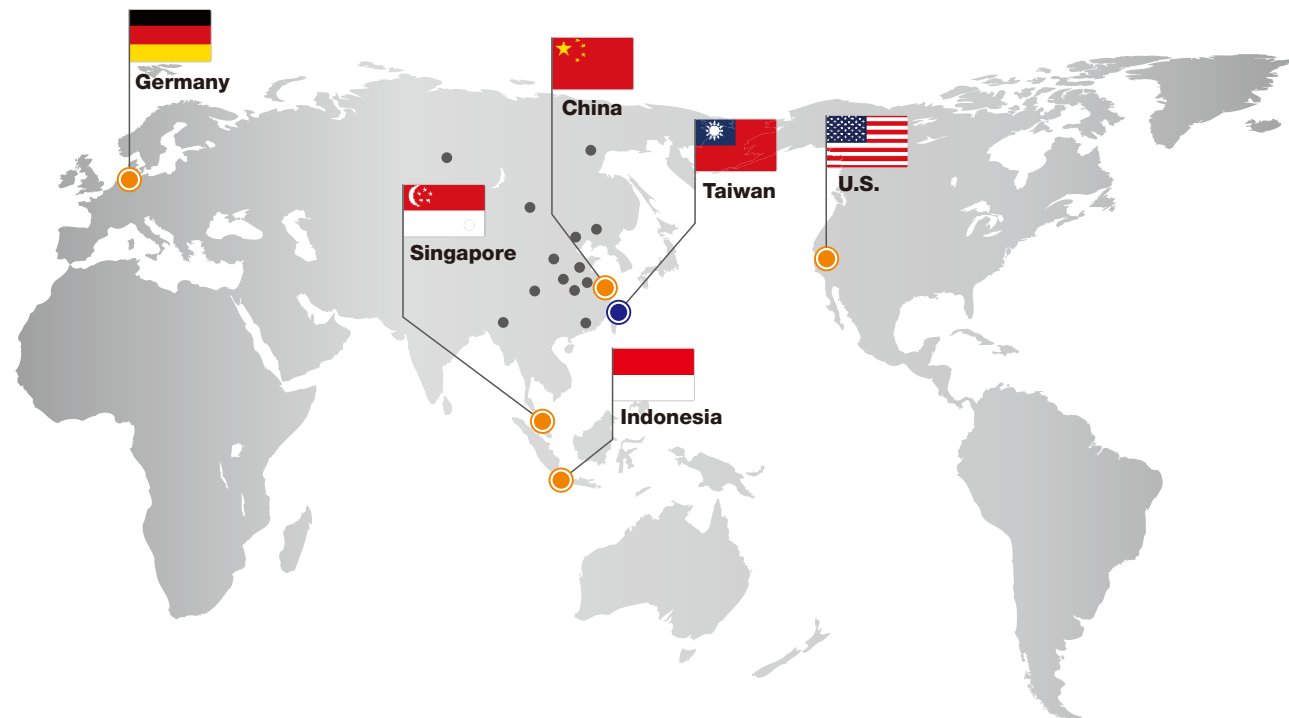

Head Quarter

Taiwan
FineTek Co., Ltd. - Taipei Head Quarter
 No.16, Tzuchiang St., Tucheng Industrial Park
 New Taipei City 236, Taiwan
 TEL: 886-2-2269-6789
 FAX: 886-2-2268-6682
 EMAIL: info@fine-tek.com

Asia

China
Fine automation Co., Ltd. - Shanghai Factory
 No.451 DuHui Rd, MinHang District, Shanghai,
 China 201109
 TEL: 86-21-6490-7260
 EMAIL: info.sh@fine-tek.com

Singapore
FineTek Pte Ltd. - Singapore Office
 37 Kaki Bukit Place, Level 4 Singapore 416215
 TEL: 65-6452-6340
 EMAIL: info.sg@fine-tek.com

Indonesia
PT. FineTek Automation Indonesia - Indonesia Office
 PERGUDANGAN TUNAS BITUNG
 JL. Raya Serang KM. 13,8, Blok C3 No. 12&15, Bitung Cikupa,
 Tangerang 15710
 TEL: 62 (021)-2958-1688
 EMAIL: info.id@fine-tek.com

North America

California, U.S.
Aplus Finetek Sensor Inc. - US Office
 355 S. Lemon Ave, Suite D
 Walnut, CA 91789
 TEL: 1 909 598 2488
 FAX: 1 909 598 3188
 EMAIL: info@aplusfine.com

Europe

Germany
FineTek GmbH - Germany Office
 Bei den Kämpen 26
 21220 Sevetal-Ramelsloh, Germany
 TEL: +49-(0)4185-8083-12
 FAX: +49-(0)4185-8083-80
 EMAIL: info@fine-tek.de

Mütec Instruments GmbH - Germany Office
 Bei den Kämpen 26
 21220 Sevetal-Ramelsloh, Germany
 TEL: +49-(0)4185-8083-0
 FAX: +49-(0)4185-8083-80
 EMAIL: muetec@muetec.de



Distributor:

08-ESTCP-091024



www.fine-tek.com

EST Grain Silo Temperature & Level Monitoring System



System Introduction



Temperature is a key factor for maintaining grain quality in a grain storage system. When the grain has suffered from deterioration, corrosion or pest and disease damage, the temperature is increased inevitably. If precise temperature information of the grain can be mastered, an air conditioning system can be more efficiently controlled to achieve high efficient energy management. For silo management, an EST system can measure grain temperature in silo and measure stored grain level synchronously, thereby not only instantly tracking and recording grain conditions, recording historical records, but also providing optimal grain storage quality monitoring.


The EST can be matched with the FineLink hub series, and employs an RS485 communication interface to transmit information to a central control room or a human-machine interface via wire or wirelessly. The EST is matched with MMS-TLA silo information and integrated with monitoring software, so that a user can easily monitor dual information, both the temperature and grain level in the silo, through a remote computer, thereby performing grain storage management with the utmost convenience and efficiency.

Content

EST10000-A multi-point temperature sensor	3
EST10000-B 2 in 1 grain temperature & level monitoring transmitter	5
Installation Qty Guide	7
Order Information	9
FineLink System Hub(1 to 8)	11
RCU2 Remote Control Unit	13
MMS-TL Materials Management System	15
IPC Industrial Computer	17
FineLink 1-wire / FineLink RS485	19
System Architecture	21
Wireless System Architecture	23
Application Example	27

EST10000-A

multi-point temperature sensor

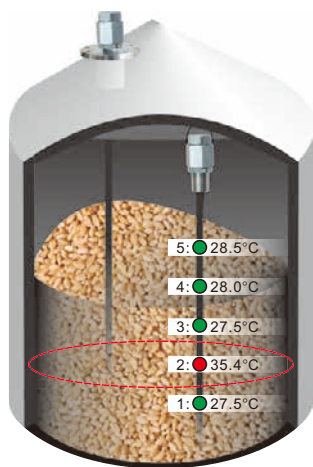

System Introduction

EST10000-A multi-point temperature sensor wire can measure temperature of grain in different positions of the silo in real time, to record condition of the grain and provide you the optimal monitoring of grain storage quality. Relative to the traditional silo, manual temperature measurement is time-consuming and arduous. The temperature measured by EST10000-A is digital signal, which can output RS485 communication mode through matching with FineLink 1-wire to transmit information to the central control room or human-machine interface. The user can easily know the grain temperature in the silo only from the remote end and conduct the most efficient grain storage management.

Features


- Reinforced steel cable design can effectively resist the impact of grain and prolong service life of the product.
- Provide multi-point temperature measurement to help managers cope with food more swiftly.
- Detect whether there is fungus produced or activities of insects, to maintain food quality.
- Provide real-time monitoring of silo temperature for practitioners in food, fodder and grain, to help long-term storage.
- Prevent qualitative change of grain in the silo and fire disaster due to smolder.
- Temperature measurement position can be customized according to customer's requirements, which can be hung outside or built in the silo.

Specifications

Measurement range	-10~85°C
Resolution	0.1 °C
Accuracy	± 0.5 °C
LengthMax.	Max. 30 m
Quantity of sensors	Max. 30 PCS
Position of sensors	One sensor is built in every meter
Cable material	Coated with XLPE, inner ring is copper wire (Standard)
Tensile load	2500 Kgf
IP rating	IP67
Housing material	SS41 Low-carbon steel
Outgoing cable diameter	φ4~7mm
Ambient temp.(Ta)	T80°C:-40≤Ta≤70°C T95°C:-40≤Ta≤80°C

FineLink 1-wire is requirement (combination)

Dimension

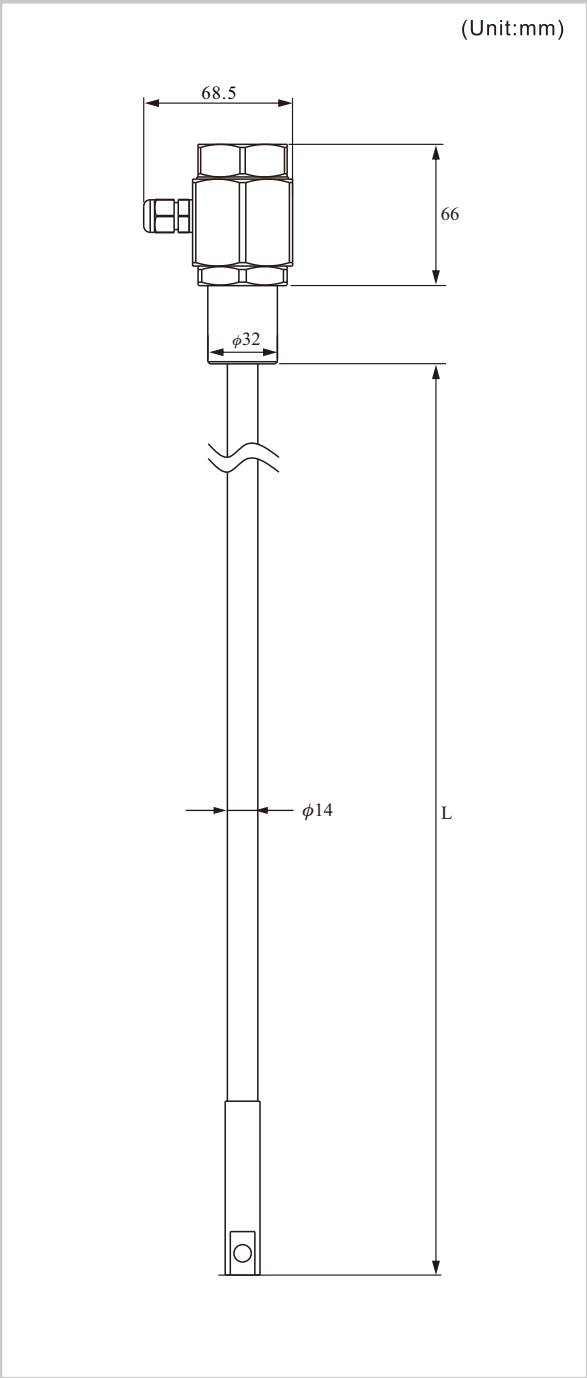

EST10000-B 2 in 1 grain temperature & level monitoring transmitter



Introduction

For silo management, users must install temperature sensing wire and grain level sensor separately in the past to get the information of temperature and grain level. EST10000-B two-in-one silo temperature and grain level meter can synchronously measure grain temperature and level in the silo, to track and record grain condition, so as to provide you the optimal grain storage quality monitoring. EST10000-B adopts the RS485 communication interface, to transmit information to the central control room or human-machine interface. Users can monitor dual information of grain temperature and level in the silo from the far end, to conduct the most convenient and efficient grain storage management.

Features


- Unique in the industry, EST10000-B transmitter integrated with simultaneous monitoring of grain level and temperature.
- Steel cable design can effectively resist the impact of grain and prolong service life of the product.
- Provide real-time multipoint temperature measurement to help managers cope with food more swiftly.
- Detect whether there is fungus produced or there are activities of insects, to maintain food quality and facilitate long-term storage.
- Prevent qualitative change of grain in the silo and fire disaster due to smolder.
- Temperature measurement can be customized according to customer's requirements.
- Any two points of EST10000-B are in simple calibration mode of grain level.
- The product uses open main current communication interface RS485. The system user can install the device on any system having the communication interface.





Specifications

Power input	9 ~ 30 Vdc
Measurement range	-10~85 °C
Resolution	0.1 °C
Accuracy	± 0.5 °C
Length	Max.30 m
Quantity of sensors	Max.30 PCS
Position of sensor	One sensor is built in every meter
Sampling speed	Grain level measurement: ≤1sec Temperature measurement: ≤1sec/node
Non-linearity of grain level	± 1 % FS
Output interface	RS485; Baud Rate:9600~57600 bps
Material of junction box	Aluminum alloy (ADC-12)
Outgoing cable diameter	φ4~7 mm
Cable material	Coated with XLPE, inner ring is copper wire
Tensile load	2500 Kg
IP rating	IP 67
Ambient temp.(Ta)	T80°C: -40≤ Ta≤ 70°C T95°C: -40≤ Ta≤ 80°C

Dimension

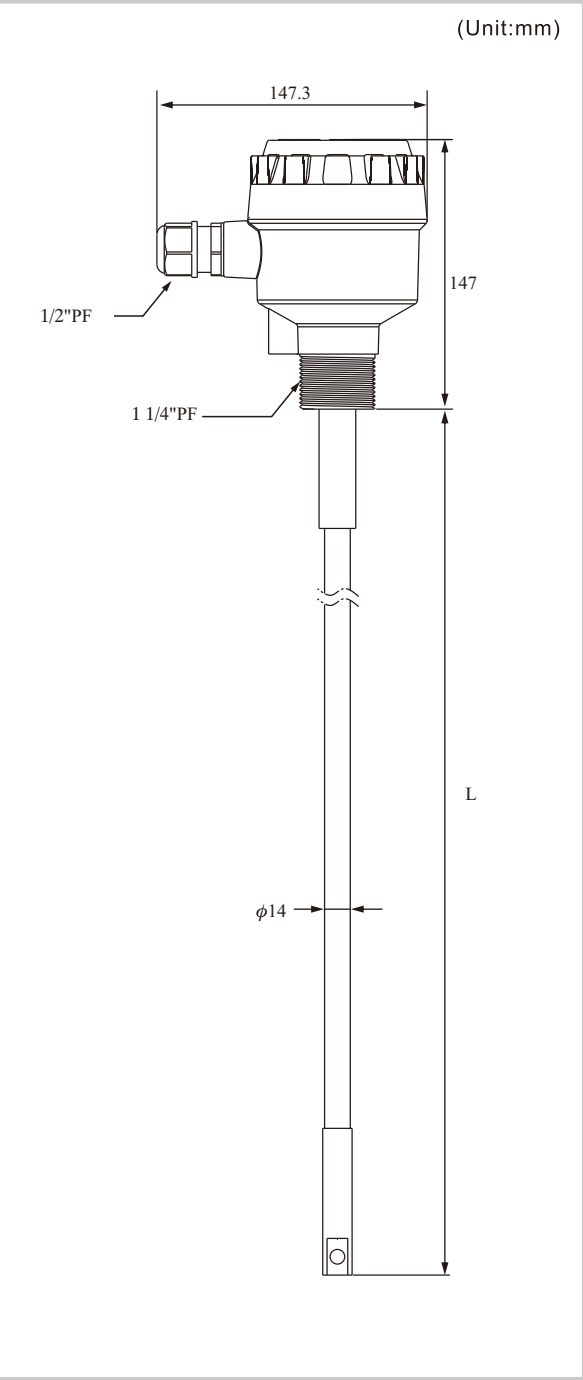

Installation Qty Guide

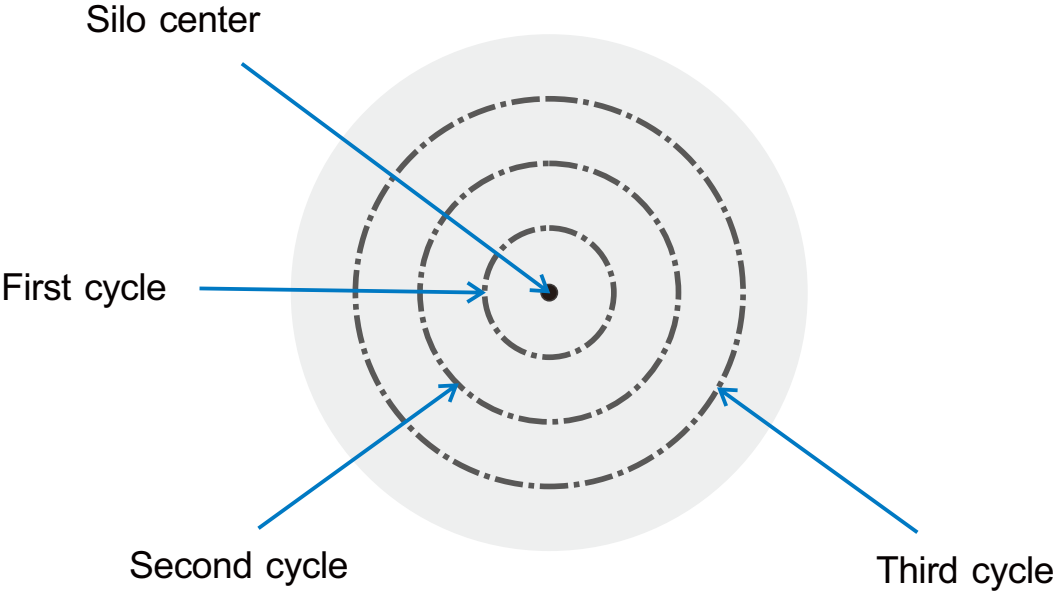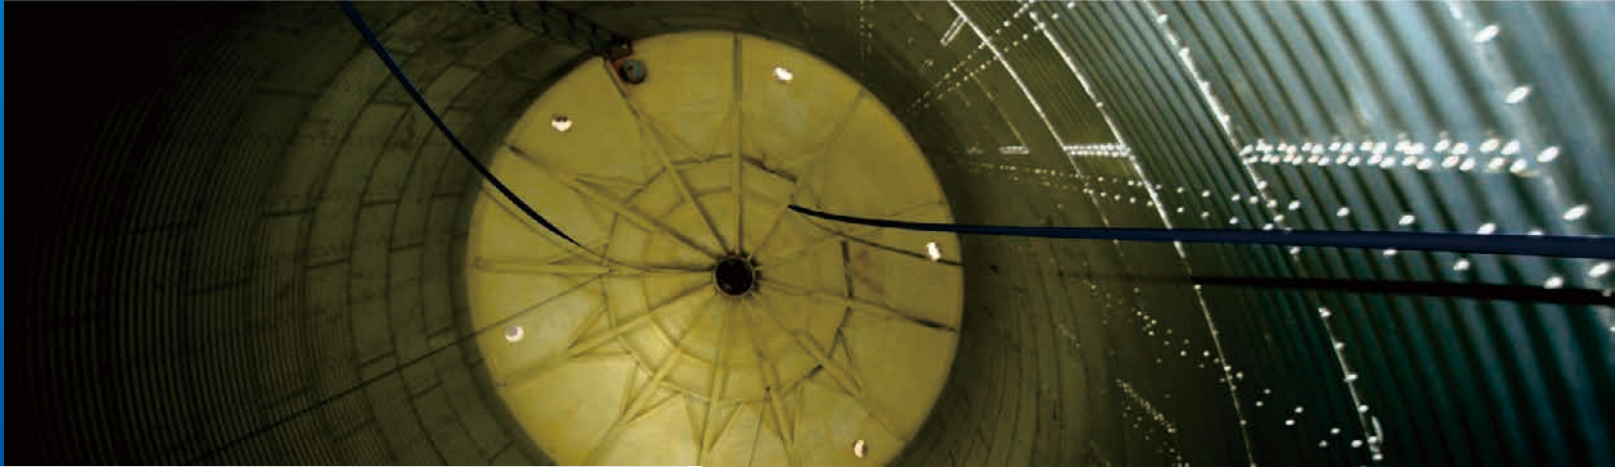

If the silo is bigger than 8 meters in diameter, we suggest the customer follows our guide of sensor number and sensor installation position to guarantee system can totally monitor temperature change of material inside the silo.

Silo diameter	EST sensor number	Silo center	First cycle			Second cycle			Third cycle		
			Radius (m)	Quantity	Interval angle	Radius (m)	Quantity	Interval angle	Radius (m)	Quantity	Interval angle
4	1	1									
6	1	1									
8	3	0	2.3	3	120						
10	3	0	2.5	3	120						
12	4	1	3.3	3	120						
14	6	1	4.7	5	72						
16	7	1	5.6	6	60						
18	8	1	6	7	51						
20	11	0	2.5	3	120	7.5	8	45			
22	12	0	2.8	3	120	8.2	9	40			
24	13	0	3	3	120	9	10	36			
26	17	1	5.3	6	60	10.6	10	36			
28	19	1	6.6	6	60	10.6	12	30			
30	22	0	2.6	3	120	7.5	7	51	12.8	12	30
36	29	0	2.5	3	120	8.5	10	36	14.5	16	22.5
40	34	1	5.6	5	72	11.3	10	36	17	18	20

Order Information



EST100

0708

0910111213141516171819202122232425

0708

Certification

00: None
1B: ATEX-Exia
2B: IECEx-Exia

09

Type

A: Multi-point temperature sensor
B: 2 in 1 grain temperature & level monitoring transmitter

Connection

1011

00: None
Flange item
AK: JIS-FF
AN: ANSI-RF
AS: DIN-FF

Thread item
AC: ANSI
AA: JIS

1213

00: None
A9: 1-1/4"
B1: 1-1/2"
B2: 2"
B4: 2-1/2"
B5: 3"
B7: 4"
B8: 5"
B9: 6"
D9: DN32
E1: DN40
E2: DN50
E3: DN65
E4: DN80
E5: DN100

1415

00: None
03: PF male
07: NPT male
40: 5kg/cm²
42: 10kg/cm²
48: 150Lbs
49: 300Lbs
57: PN10
58: PN16

1617

Connection material

MA: SUS304
MD: Low carbon steel
MH: Aluminum alloy

1819202122232425

(Next page)

EST10000

0910111213141516171819202122232425

1819

Sensor interval

05: One sensor every 0.5m
08: One sensor every 0.8m
10: One sensor every 1.0m
15: One sensor every 1.5m
20: One sensor every 2.0m
28: One sensor every 2.8m
:
:
:
95: One sensor every 9.5m

Temp. sensor interval=cable length ÷ numbers of temp. sensor .
Lowest interval = lowest temp. sensor to end of cable is fixed to be 30mm .
Highest interval (L1) = sensor interval -30mm .

Sensor

2021

Sensor amount

01: 1 Pcs
02: 2 Pcs
:
:
:
30: 30 Pcs(Max)

22232425

Length


Code	Probe Length
0500~9999	500~9999mm
A100~A300	10000~30000mm "A" means multiplied by 100 times

9

10

FineLink System Hub(1 to 8)

FineLink system Hub(1 to 8)

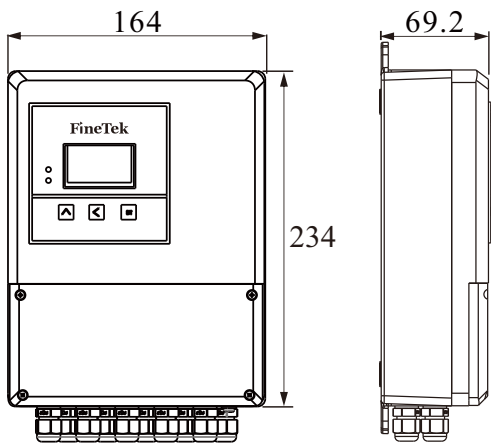

(Unit:mm)

Introduction

The multiple measuring data in one sensor will be interpreted by FineLink through RS-485 signal and send out to PC or other human machine interface. So the immediate temperature status can be monitored. In order to prevent infestation of pest in the storage when there is temperature changes.

Specifications

Input power supply	12~28Vdc
Ambient temp.	-40~80°C
EST110	8
Housing material	Aluminum alloy (ADC-12)
RS-485 baud rate	RS-485
Cable diameter	1200~57600
Cable Isolated thickness	φ4~7
Communication interface	>0,5mm
IP rating	IP67
ATEX	ATEX II 1D Ex IIIC T80°C, T95°C Da IECEEx Ex ia IIIC T80°C, T95°C Da (Need to match the barrier with same Exia explosion proof)

Order Information

③⑥ Construction

01: Wired

⑦⑧ Certification

00: None
1B: ATEX-Exia
2B: IECEEx-Exia

⑨⑩ Function

A4: 1-wire

JMW 6 ⑤⑥ ⑦⑧ ⑨⑩

MMS-TL

Materials Management System



Software (MMS-TL)



System Requirements

- Central processing unit (CPU) P4 1GHz above
- Memory RAM 512MB above
- Operating system Microsoft Windows 2000 above
- At least 1GB idle hardware space for database
- RS232 or USB

Introduction

MMS-TL intelligent grain silo temperature and level management system is a set of PC software, which can replace measurement and record manually and operating method is through configuration of electricity meter and switch. It can be widely applied to industries such as rice milling, flour, fodder, food, low temperature unhulled rice and grain crop as well as grain level environment that needs measurement of multi-point temperature. It is applicable to temperature and grain level detection in tank and barrel of general power, particle and block. MMS-TL can monitor temperature change of the silo all the time, to prevent abnormal temperature, so as to avoid damage to the grain. It can also effectively manage entry, stock and sales of grain, to reduce operating cost, so as to increase profit and improve customers' competitiveness.

Features

- Set Item: Tank number, tank name, device number, device model, FineLink 1-Wire general setting, grain high level alarm, grain low level alarm, high temperature alarm, low temperature alarm, series port setting, connection timeout setting, selection of multiple tank types and related parameters corresponding to sizes, alarm sending mode, alarm information receiving mode and account setting and SMTP email server setting, etc.
- Display Item: Tank name, grain percentage, grain weight, minimum temperature, maximum temperature, current temperature of each measuring point of a sensing device, temperature change of a certain sensing device's certain measuring point on that day and history information review, etc.
- Alarm Item: Grain high/low level alarm, high/low temperature alarm and connection timeout, etc.
- Report Output: History information is transformed to text or Excel format.
- Alarm Mode: Display it on the screen on the spot and utilize e-mail to transmit alarm information to preset receivers through regional Intranet or Internet.
- Account Setting: Set the account for rights of Supervisor or Operator.

Home

User can view all information of each tank in page mode, including high/ low alarm, material height, ratio of remaining material, material weight, sensing weight status, material selection, tank measurement, and motor indication etc.




History Chart

User can observe all historical messages and transfer data in .txt or EXCEL format standard, let user can analyze data in Windows system.



Material Management

Daily information can be checked and examined the import /outport material time. Equips with automatic scaling function and mouse point sliding function, let user easy to find the critical point.

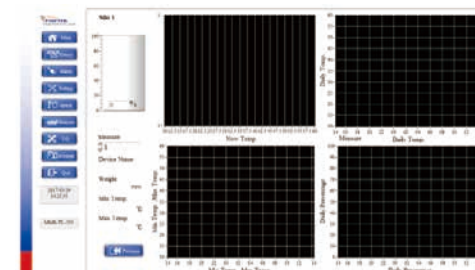

Alarm Setting

This function supports user to get real-time message to predetermined mail message recipients and field operator get the alarm message dialog window at the same time. It save the communication between the field and manage center while the critical situation occurred.




I/O Setting

Relay output for level or temperature.




Configuration

Can set parameters of each device, including: Silo number, Comport, Product, Type, Density etc.

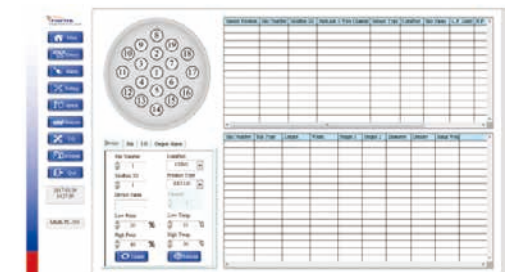

IPC Industrial Computer

IPC (Industrial PC)




Features

- Intel® Dual Core D2550 1.86 GHz processor
- 8 COM model: 6 x RS-232, 2 x RS-232/422/485
- 6 x USB 2.0
- Dual PCIe GbE LAN for high-speed network applications


Specifications

Model Name		TANK-600-D2550
Chassis	Color	Black C + Silver
	Dimensions (WxDxH)	193.4 x 200 x 57 mm
	System Fan	Fanless
	Chassis Construction	Aluminum alloy
Motherboard	CPU	Intel® D2550 1.86 GHz dual-core processor
	Chipset	Intel® NM10
	System Memory	On-board DDR3 4GB
Storage	Hard Drive	1 x 2.5" SATA HDD Bay
	USB 2.0	6
I/O interfaces	Ethernet	2 x RJ-45 Realtek 8111E GbE LAN
	RS-232	6 COM: 6 x DB-9 16 COM: 14 x RS-232 by DB-78
	RS-422/485	2 x RS-232/422/485 by DB-9
	Display	1 x VGA
	Resolution	VGA: Up to 2048 x 1536 @ 75Hz
	Audio	1 x Line-out, 1 x Mic-in
Expansions	PCIe Mini	1 x Full Size (Support mSATA) 1 x Half size
	Power Input	DC Jack : 9~36V DC
Power	Power Consumption	12V@2.2A (Intel® Atom™ D2550 with 4GB DDR3 memory)
	Mounting	VESA 100, DIN-Rail
Reliability	Operating Temperature	-20°C ~70°C with air flow (SSD), 5% ~ 95%, non-condensing
	Operating Shock	Half-sine wave shock 5G, 11ms, 3 shocks per axis
	Operating Vibration	MIL-STD-810F 514.5C-2 (with SSD)
	Weight (Net/Gross)	2.2 Kg / 3 Kg
	Safety / EMC	CE/FCC
OS	Supported OS	Microsoft® Windows®7


Front View

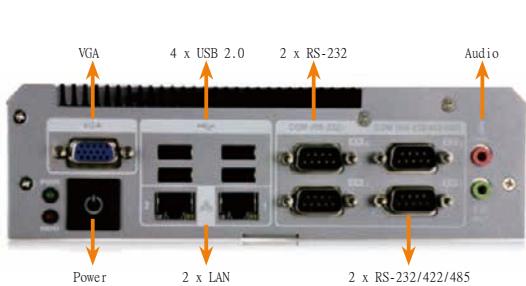

Rear View

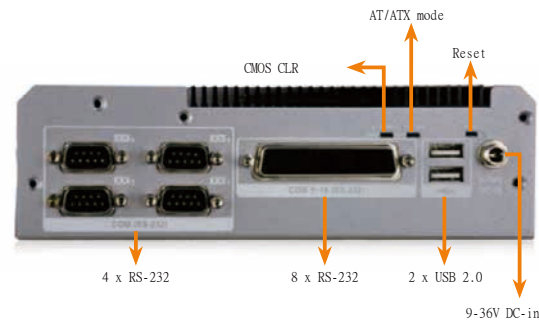

Dimension

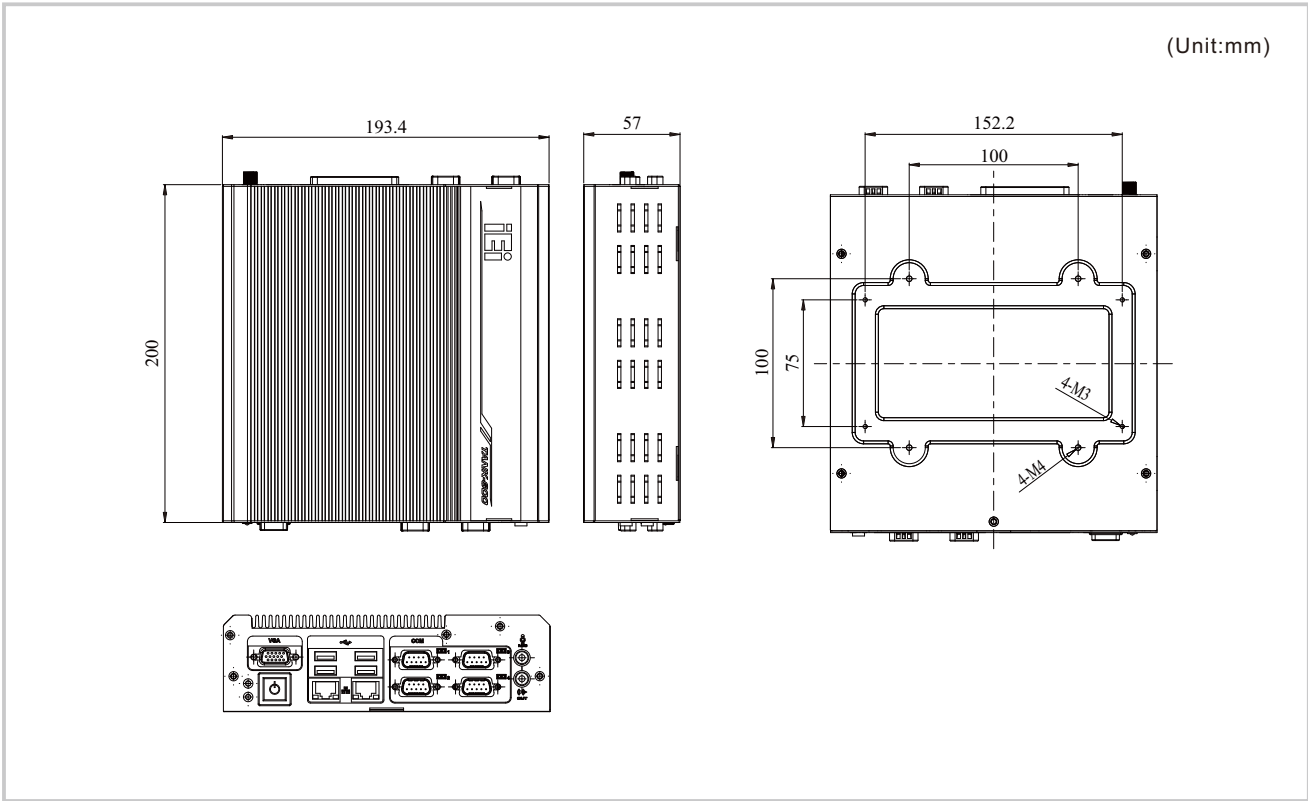


FineLink 1-wire / FineLink RS485



FineLink 1-wire / FineLink 1-wire wireless

(Unit:mm)

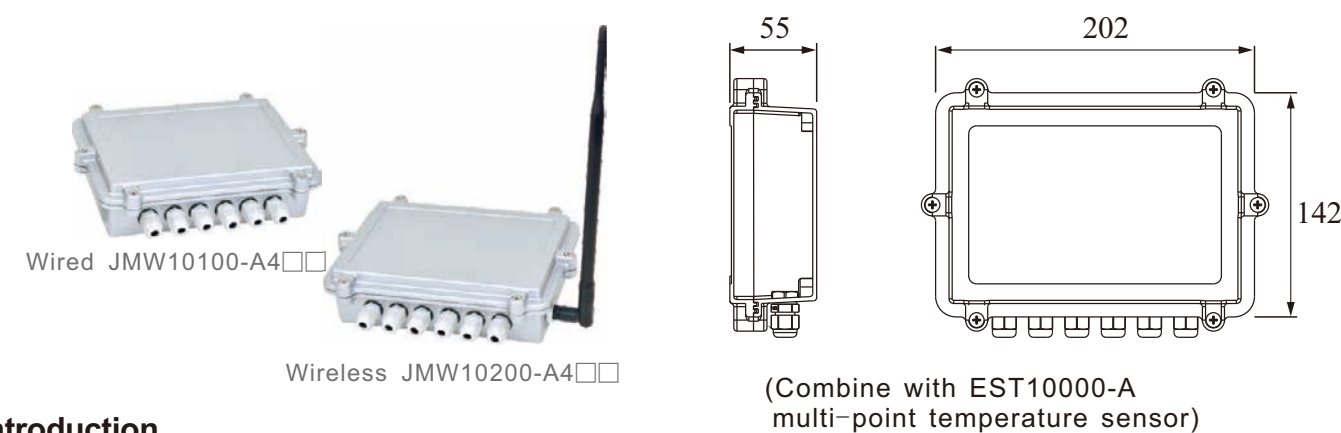

Introduction


It extends and connects to the sensor through wired way, which can connect 4 sets of EST10000-A 1-Wire communication modes. Each sensor has an independent connection, which can prevent the whole system from crashing due to a particular equipment failure, so as to make users capable of maintaining multiple equipment more easily. 1-wire digital signal can be transformed to RS485 to make MMS-TL silo temperature and grain level management system or PLC read and use.

Specifications

Supply voltage	10~30Vdc
Ambient temperature	-40~80°C
Connection port	Max.4
Housing	Aluminum alloy (ADC-12)
Communication interface	RS-485
RS-485 baud rate	9600~115200
IP rating	IP67

FineLink RS485 / FineLink RS485 wireless

(Unit:mm)

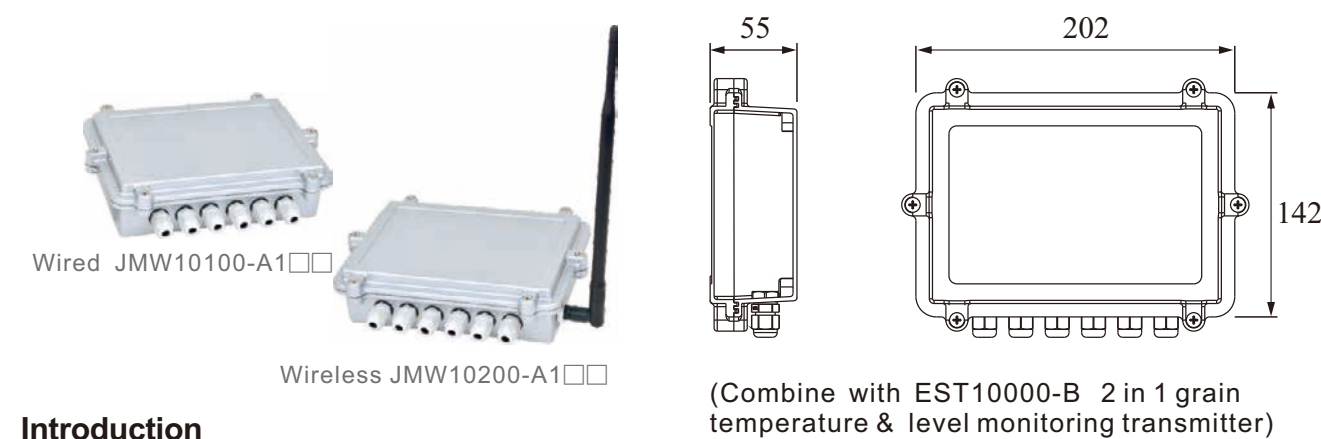

Introduction

It integrates 4 sets of signals with RS485 communication mode to make wiring more convenient and clear. Each port is independent, which can prevent the whole system from crashing due to a particular equipment failure, to make users capable of maintaining multiple equipments more easily. 4 sets of 4-wire type connection ports also supply 24VDC power for external device.


Specifications

Power input	10~30Vdc
Current input	2A
Power output	10~30Vdc
Current output	400 mA / CH (under power input and current of 2A)
Output	RS-485
Input	Four sets of RS-485 (each set is independent and isolated)
Baud rate	1200~57600
Working temperature	-40~80°C
Electrostatic protection	IEC61000-4-2 ESD 8kV Air, 4kV contact
IP rating	IP67

System Architecture




Wireless System

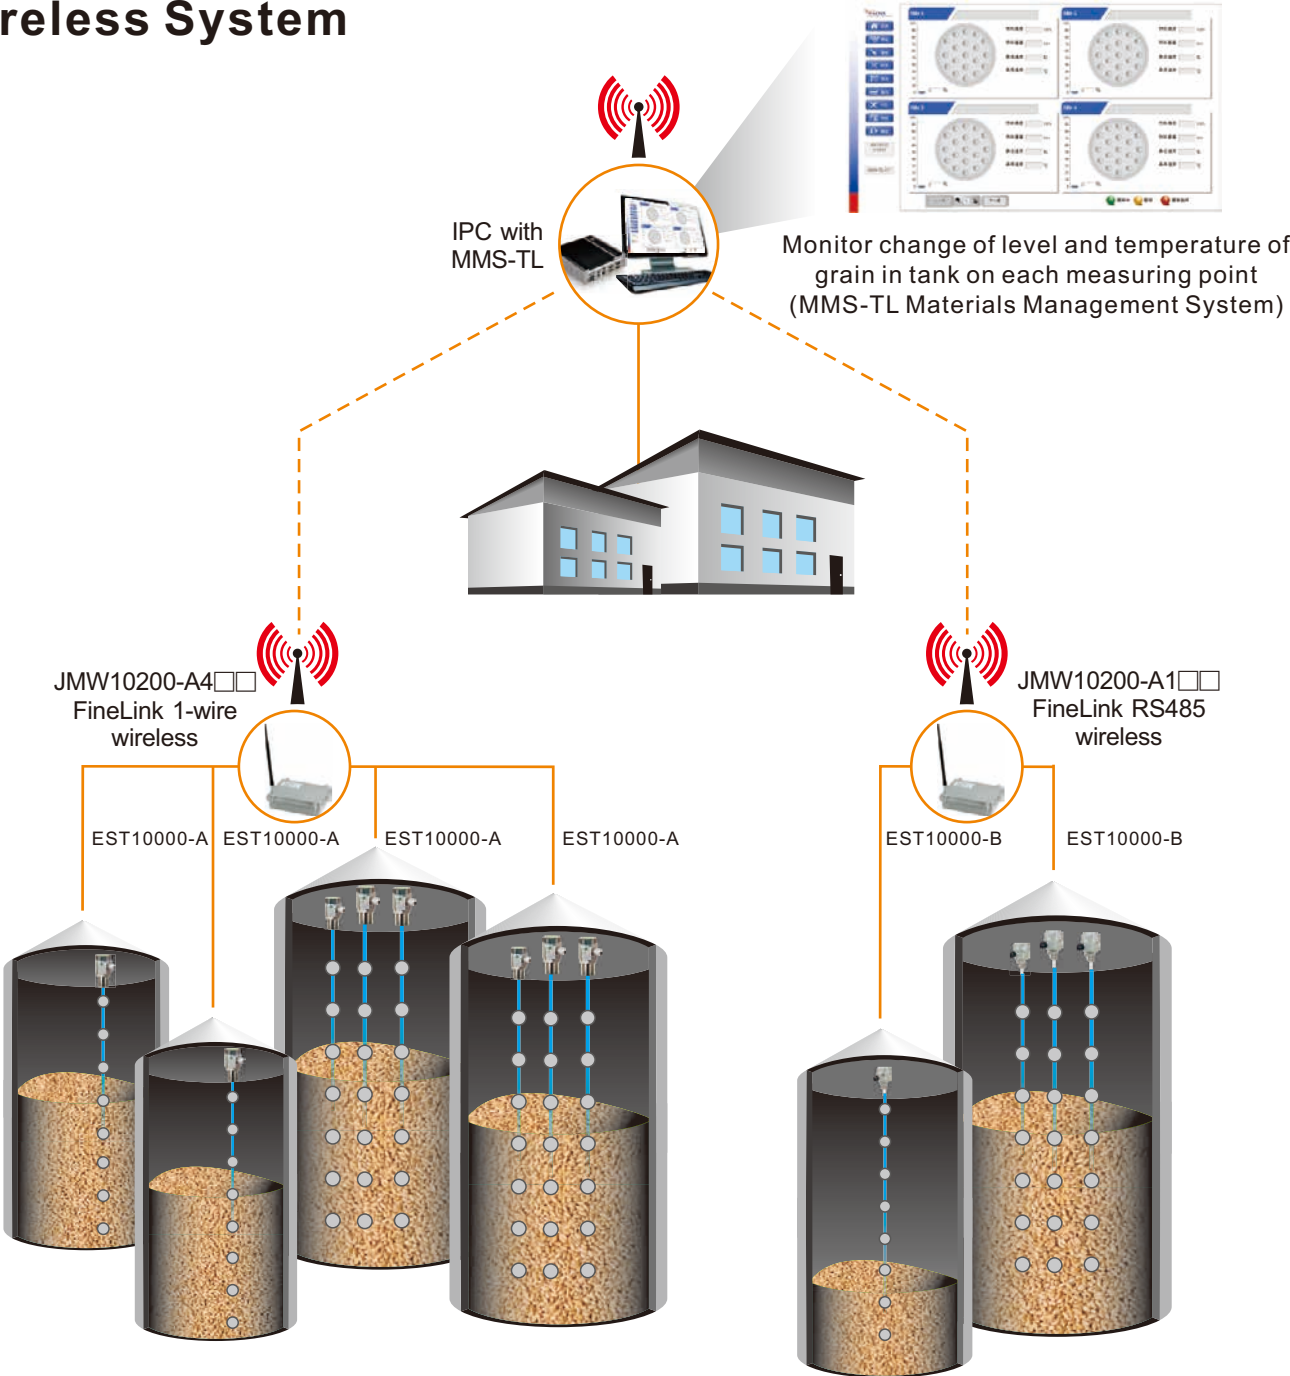


(Wireless system, please refer P15 for more details)

Wired System

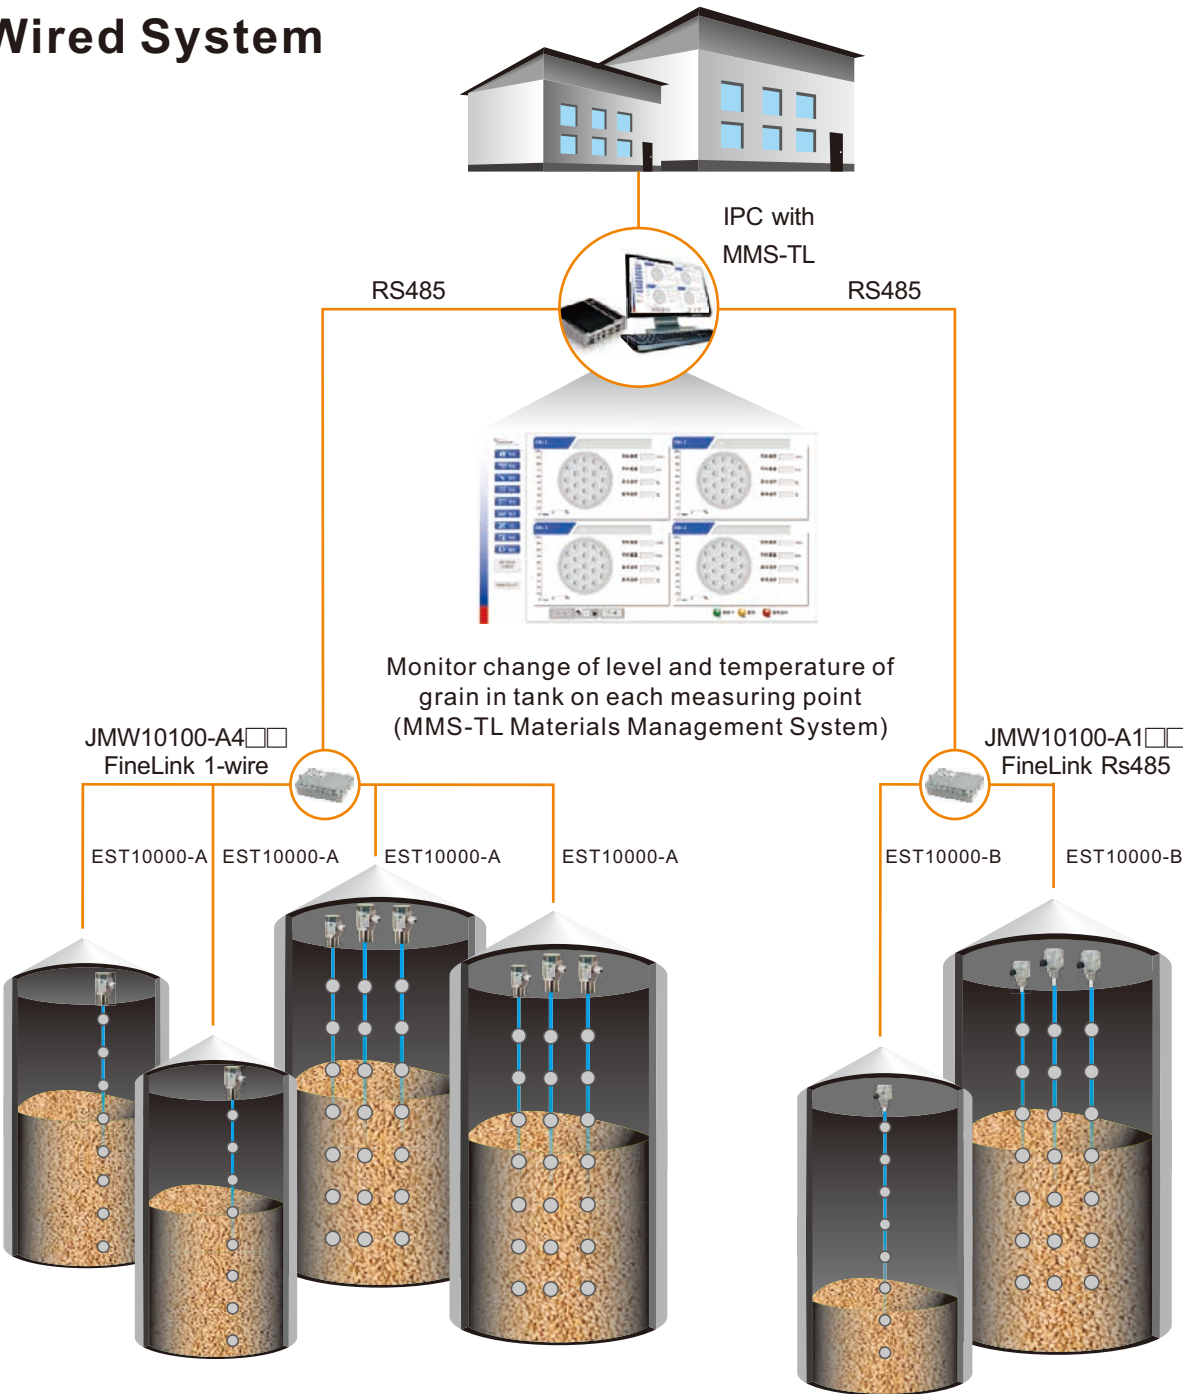

Wireless System Architecture

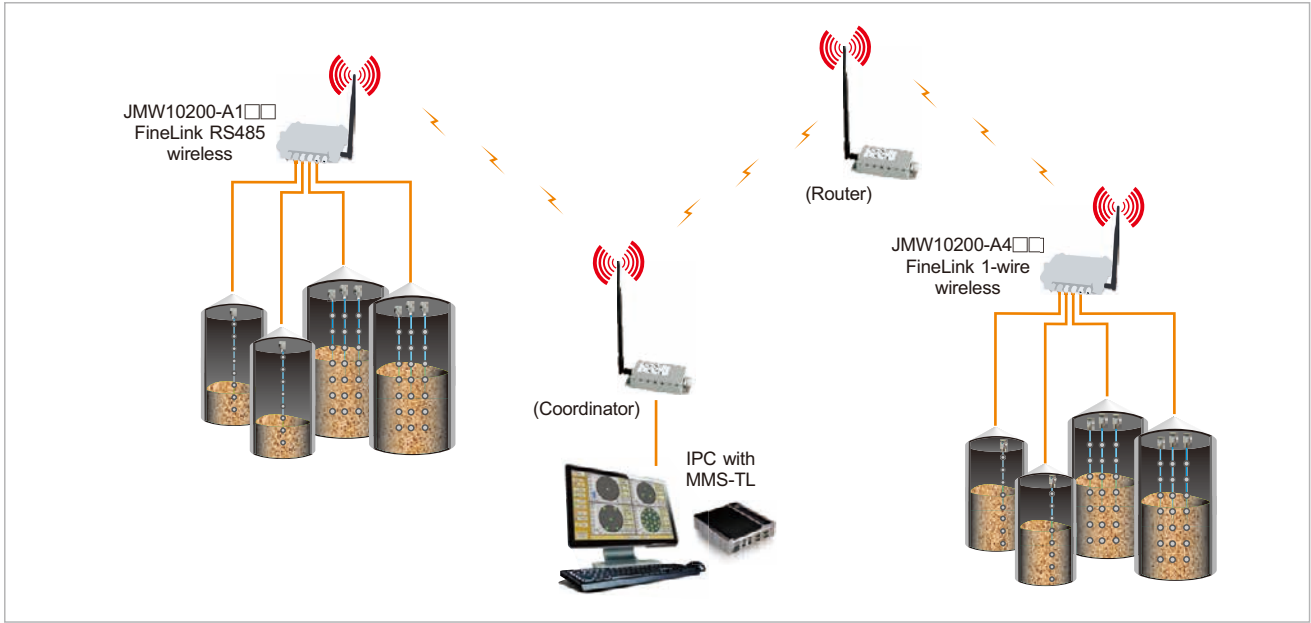

FineLink Wireless uses wireless to transmit RS485 signal, help customer reduce cable and maintenance costs.

Specification

Output communication	RS485
Input communication	FineLink RS485: Rs485 FineLink 1-wire: 1-wire signal
RS-485 baud rate	9600/19200/38400 57600/115200
Storage temp.	-40~80℃
Operating temp.	-40~80℃
Static electricity protection	IEC61000-4-2 ESD 8kV Air 4kV contact
Power Input	10V~30V
IP rating	IP67

Wireless Communication

Operating frequency Range	2405 MHz ~ 2480 MHz
Number of channels	16 CH
Channel spacing	5 MHz
Date transmission rate	250 kbps
Sensitivity	-100 dBm (PER ≤ 1%)
Transmission range	Max. 2Km

Coordinator / Router

Coordinator

P/N: JMW20200-0C
Coordinator receives signal from FineLink or Router, then sends to PC or PLC via RS485 interface, MMS software reads and displays the measured data

Router

P/N: JMW20200-0R
Router increases transmission distance when the wireless signal strength from Finelink to Coordinator is not strong enough due to long distance. Router receives data from FineLink, then enhance and forward signal to Coordinator. then enhance and forward signal to Coordinator.



Specification

RS-485 baud rate	9600/19200/38400 57600/115200
Storage temp.	-40~80℃
Operating temp.	-40~80℃
Static electricity protection	IEC61000-4-2 ESD 8kV Air 4kV contact
Dimension	146 X 66 X 30 mm
Power Input	10V~30V
IP rating	IP67

Wireless Communication

Operating frequency Range	2405 MHz ~ 2480 MHz
Number of channels	16 CH
Channel spacing	5 MHz
Date transmission rate	250 kbps
Sensitivity	-100 dBm (PER ≤ 1%)
Transmission range	Max. 2Km
Antenna specification	3.5mm SMA Female

Order Information



IPC contains MMS-TL


- MMS/M300** IPC (traditional Chinese WIN7)
 - + MMS-TL
 - + RS485-USB converter (YTXPUSB485-T)
- MMS/M200** IPC(English WIN7)
 - + MMS-TL
 - + RS485-USB converter (YTXPUSB485-T)
- MMS/M400** IPC(simplified Chinese WIN7)
 - + MMS-TL
 - + RS485-USB converter (YTXPUSB485-T)

FineLink


Communication	Model	Order Code	Communication interface
FineLink Wired	EST10000-B	JMW10100-A150	Input: RS-485, Output: RS-485
	EST10000-A	JMW10100-A450	Input: 1-wire, Output: RS-485
FineLink Wireless	EST10000-B	JMW10200-A157	Input: RS-485, Output: ZigBee
		JMW10200-A158	Input: RS-485,Output: LoRa
		JMW10200-A159	Input: RS-485, Output: GSM-(GPRS/3G/4G)
		JMW10200-A162	Input: RS-485, Output: NBIOT
	EST10000-A	JMW10200-A457	Input: 1-wire, Output: ZigBee
		JMW10200-A458	Input: 1-wire, Output: LoRa
		JMW10200-A459	Input: 1-wire, Output: GSM-(GPRS/3G/4G)
		JMW10200-A462	Input: 1-wire, Output: NBIOT
— —	— —	JMW20200-0C	Coordinator
— —	— —	JMW20200-0R	Router

Accessories


EST110 Hanging hook
ETB-0030
(ESTAM1D-MDA0000003)




EST120 Hanging hook
ETB-0031
(ESTAM1A-0000000001)




EST120 Adjustable rotation angle mechanism
ETB-0041
(ESTAM1A-0000000004)




EST110Adjustable rotation angle mechanism
ETB-0040
(ESTAM1A-0000000003)




Weight
ETB-0050
(ESTAM1A-0000000005)
Material: Trivalent chromium
Weight: 5kg



Electrical Insulator
EBA-1403
(HP407-A01090G5)




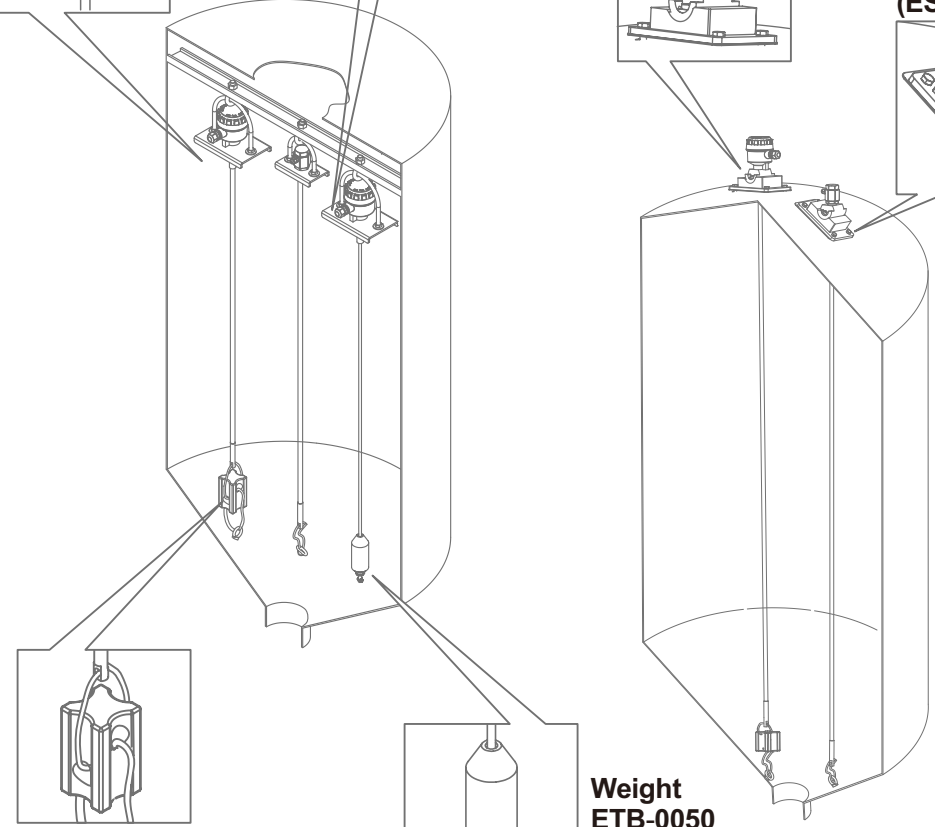


Application Example




Case 1: EST10000-A

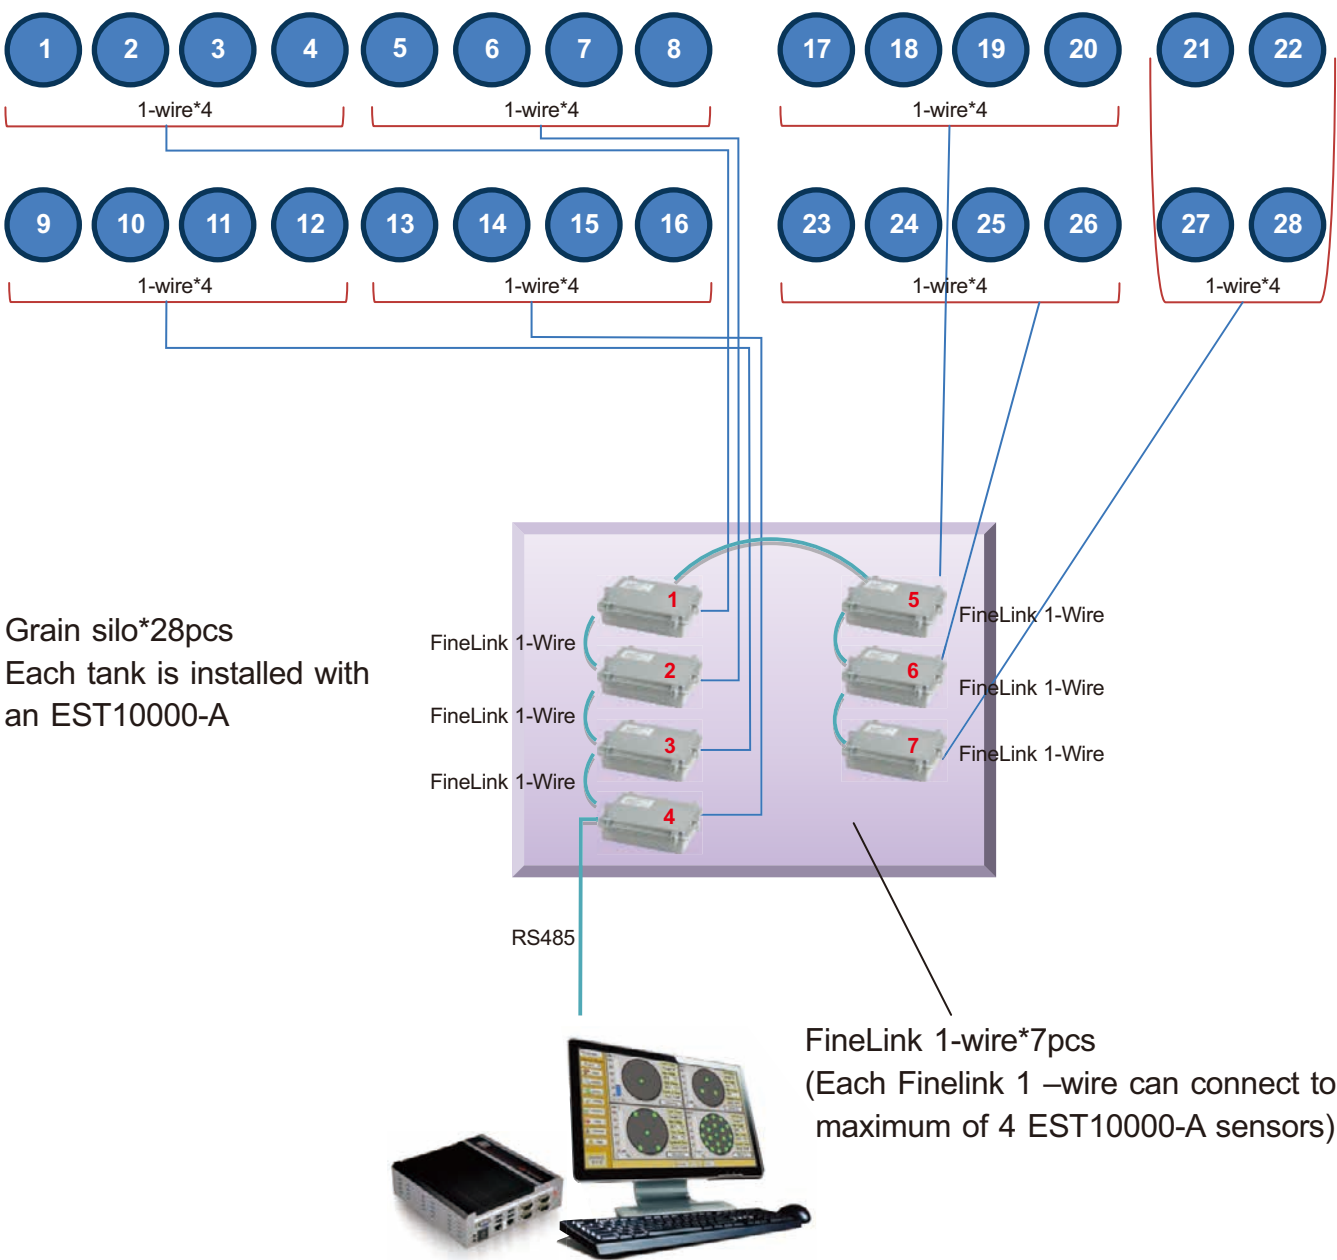


Case 2: EST10000-B

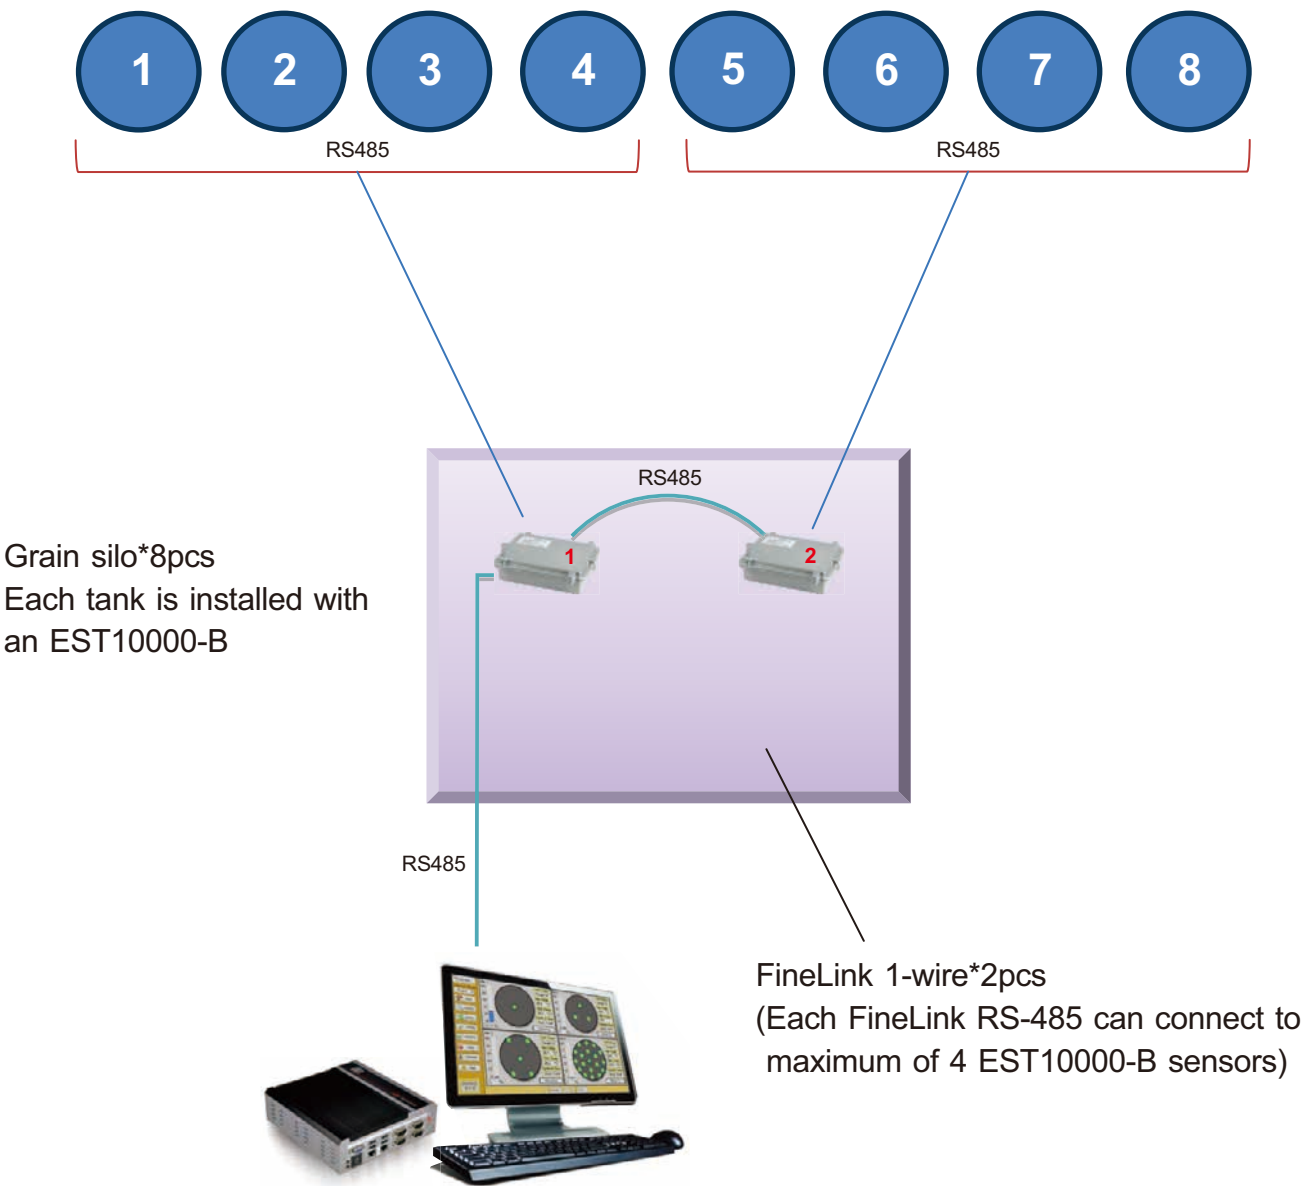

Application Example

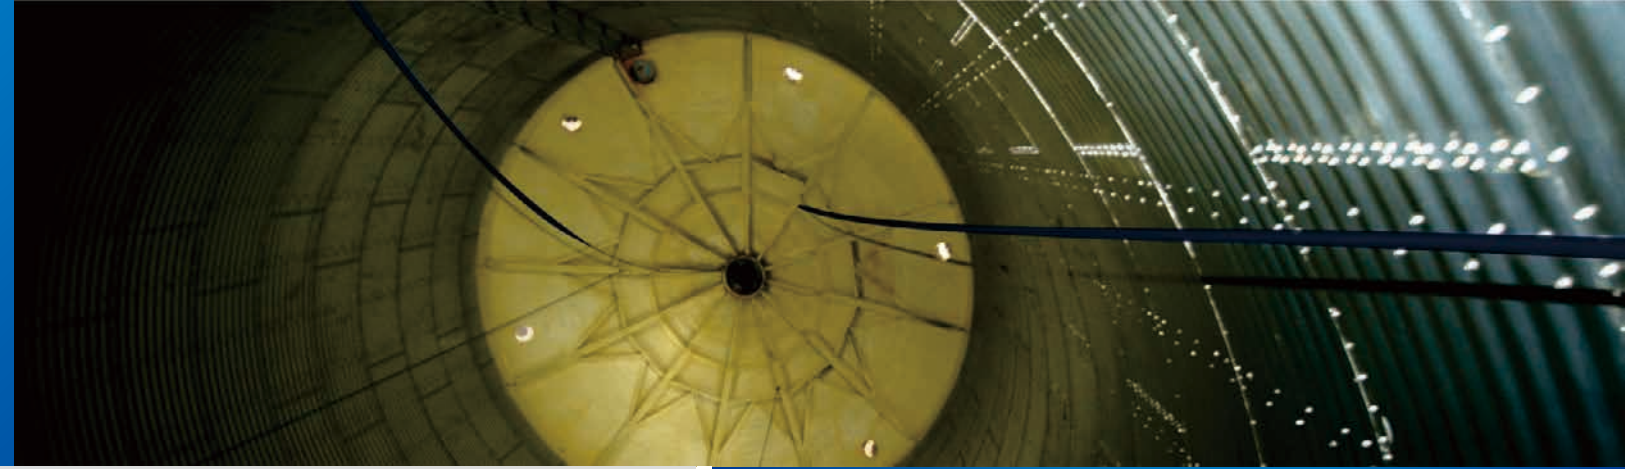


Case 3: EST10000-A+EST10000-B

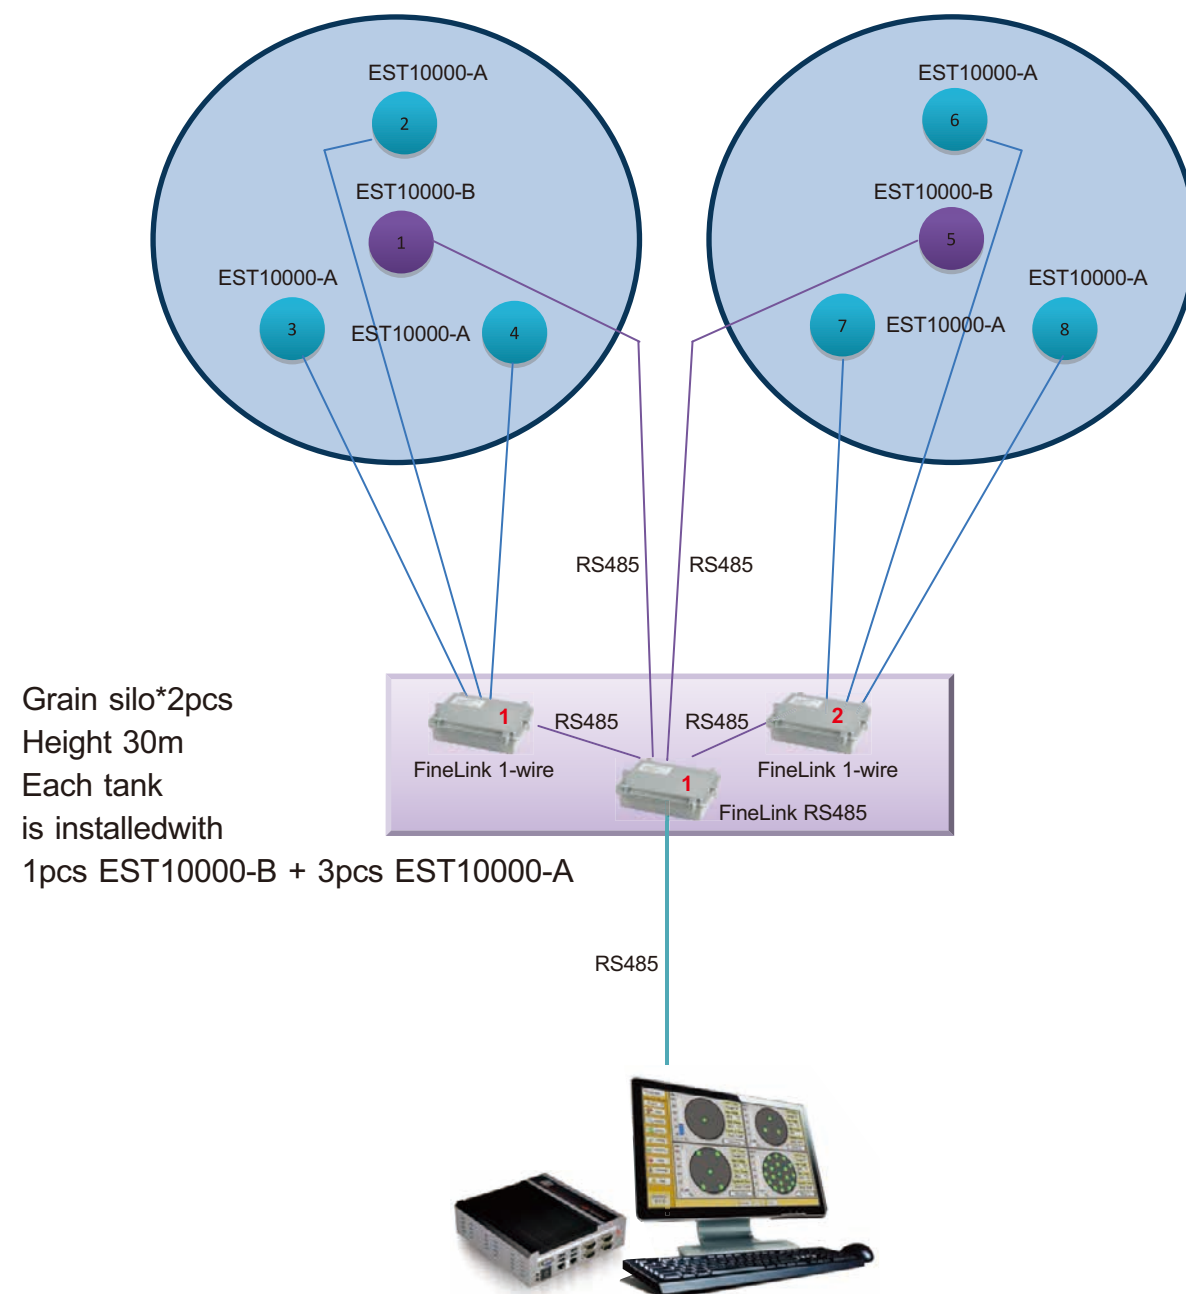

Successful stories



▲ EST10000-B

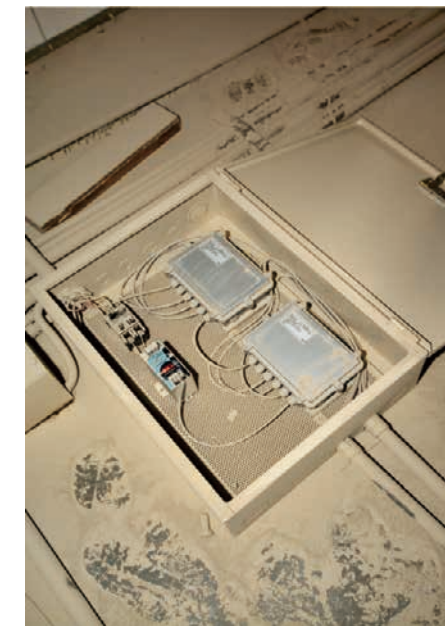

▲ FineLink RS485



▲ FineLink 1-wire



▲ EST10000-B



▲ EST10000-A