



# PRODUCTS GUIDE

***Food Beverage, daily and Pharmaceutical***



[www.fine-tek.com](http://www.fine-tek.com)



**Solid / Liquid Level Measurement for Field Application  
Pneumatic Vibrator/Air Hammer  
Temperature Controller/ Counter /Digital Panel Meter**

# Your BEST Partner

FineTek has accumulated more than 30 years of technology and experience. Always focus in the fields of industrial sensing, measuring applications with innovative research and development technology. FineTek's professional capability and strict process management, qualified by ISO9001 certification and other international professional certification, and provide all types of products that meet the needs of all fields.

## INTRODUCTION

The F&B and, pharmaceutical and beverage industry have long relied on manual operation mode, in order to improve production efficiency and quality control, many food and beverage processing processes have begun to integrate towards automation standards.

One of the difficulties facing the food and beverage industry is that the nature of the processing in the factory is different, such as receiving, storage and processing of raw materials, while covering the distributed and centralized automation application procedures, and processing may be batch processing, continuous processing or both.

Applications: Storage tank, process tank, cleaning tank of beverage production process, tank temperature monitoring, filter flow monitoring, food machinery, factory automation machinery, CIP cleaning system, etc....

The US 3-A Sanitary Standards is an accredited important international sanitary standard. 3-A Sanitary Standards, Inc. (3-A SSI) was actually founded in 2002 by five founding members in the US, they are: American Dairy Products Institute (ADPI), International Association of Food Industry Suppliers (IAFIS), International Association for Food Protection (IAFP), International Dairy Foods Association (IDFA), and 3-A Administrative Symbol Council. 3-A SSI's leadership includes a representative of the Food and Drug Administration (FDA) and US Department of Agriculture, and the 3-A Steering Committee.

The mission of 3-A SSI is to provide the dairy product, food, beverage and pharmaceutical product with hygienic safety protection for the producers, equipment manufacturers and end consumers through the designation and use of the volunteer 3-A Sanitary Standards and 3-A Accepted Practices.

Food hygiene fittings are required to pass the certification of European Hygienic Engineering & Design Group (EHEDG), which is the organization jointly founded in 1989 by the equipment manufacturers, food industry, research institutes and public health authorities to promote food processing and packaging processes. The main objective of EHEDG is to enhance food safety by improving the hygienic design of machinery and equipment in the food manufacturing industry. EHEDG actively promotes the EU legislation for the hygienic design of machinery for the handling, processing and packaging of food products (EU Machinery Directive 2006/42 / EC, EN 1672-2 and EN ISO 14159 Hygiene Standards).

## SANITARY FITTINGS



Blank Flange



Clamp Tee



Non-return Valva



Bend Tube



Connector

# CIP Cleaning System

## CIP Basic Components

CIP Tank: The tank barrel to set up  
rinse water, cleaning fluid,  
disinfecting fluid

Pipeline: Pipeline connecting CIP  
tank and the equipment  
to be cleaned

Pump: Supply pump and Reflux  
pump

Valve: Sanitary non-return valve

Heat Exchanger

Liquid Level Control

→ Water cleaning (Water rinsing leftovers)

→ Alkali cleaning (Lye cycle)

Cleaning Agents: Lye, specialty detergents

Concentration: 1~2%

Temperature: 70~90°C

→ Acid cleaning

Cleaning Agents: Nitric acids, specialty detergents


Concentration: 0.5~1.5%

Temperature: 60~80°C

→ Sterilization



Cleaning Agents: Water

Temperature: 90~95°C

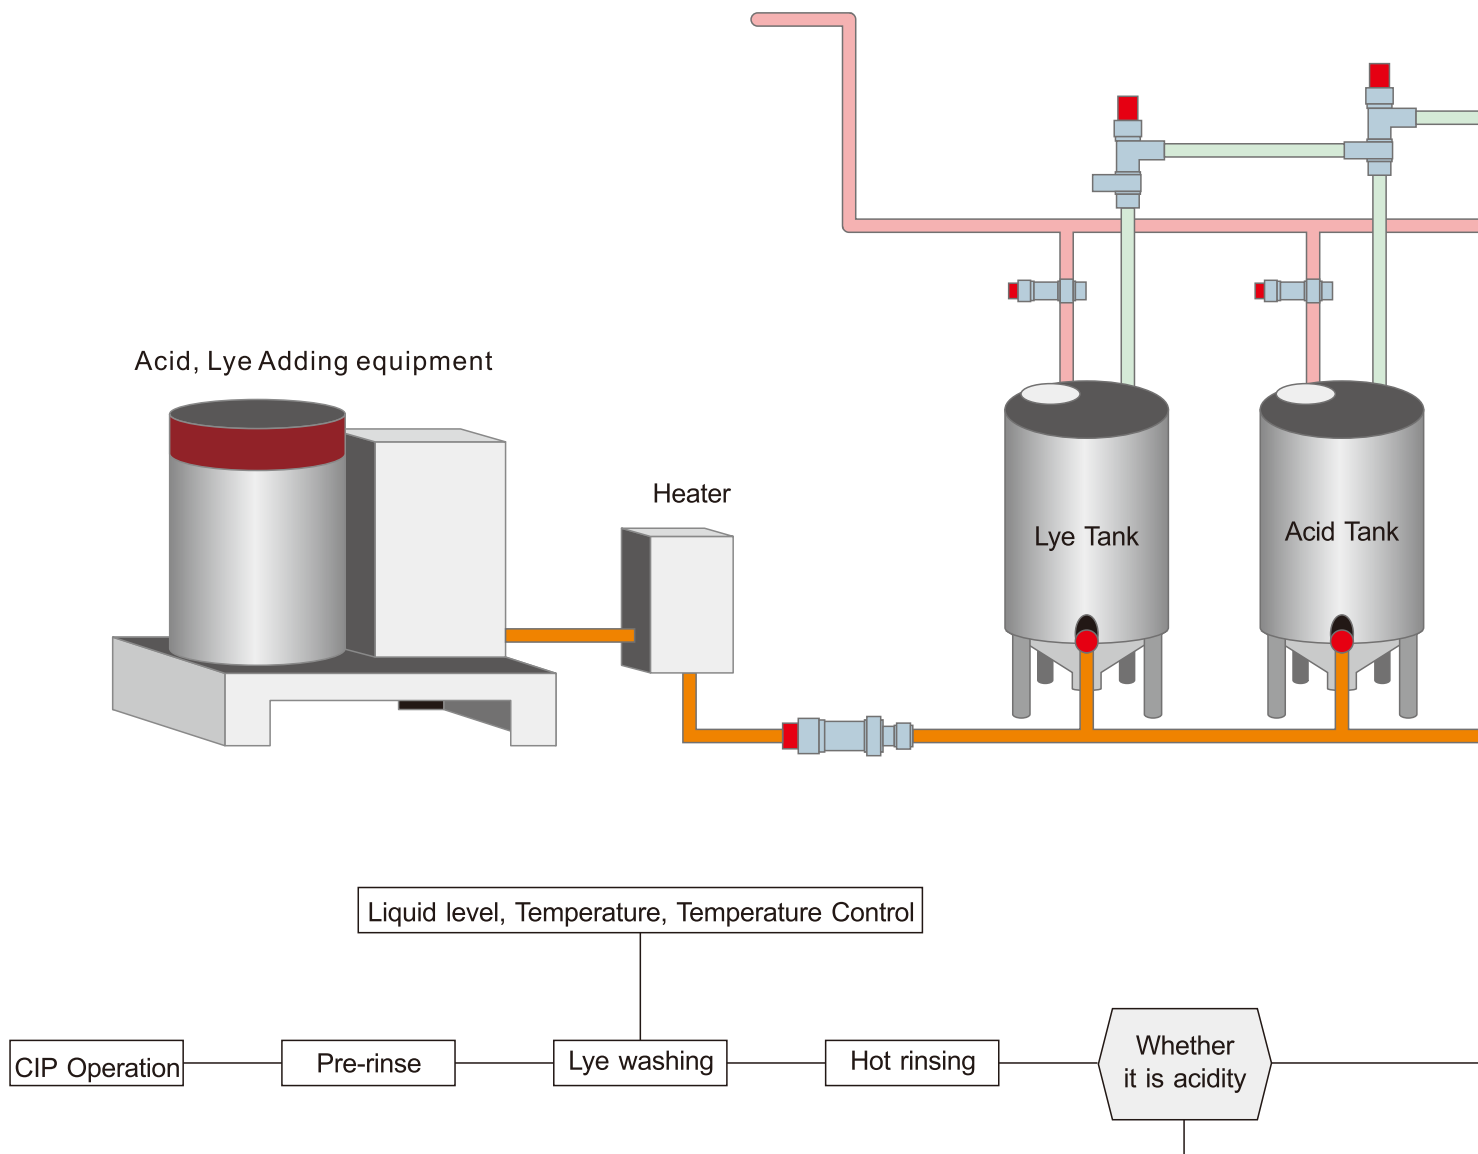

### CIP Cleaning Characteristics

- Automatic inspection of the CIP Liquid Storage Tank automatic liquid-level monitoring and replenish
- Acid, lye liquid automatic filling and monitoring
- Heating temperature and reflux temperature control
- All automatic valve and pump on and off control
- Operating status display
- Malfunction automatic stop and warning

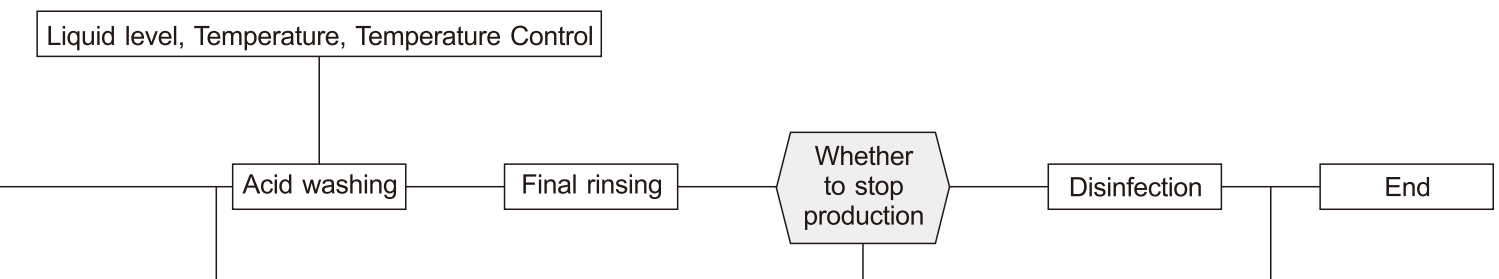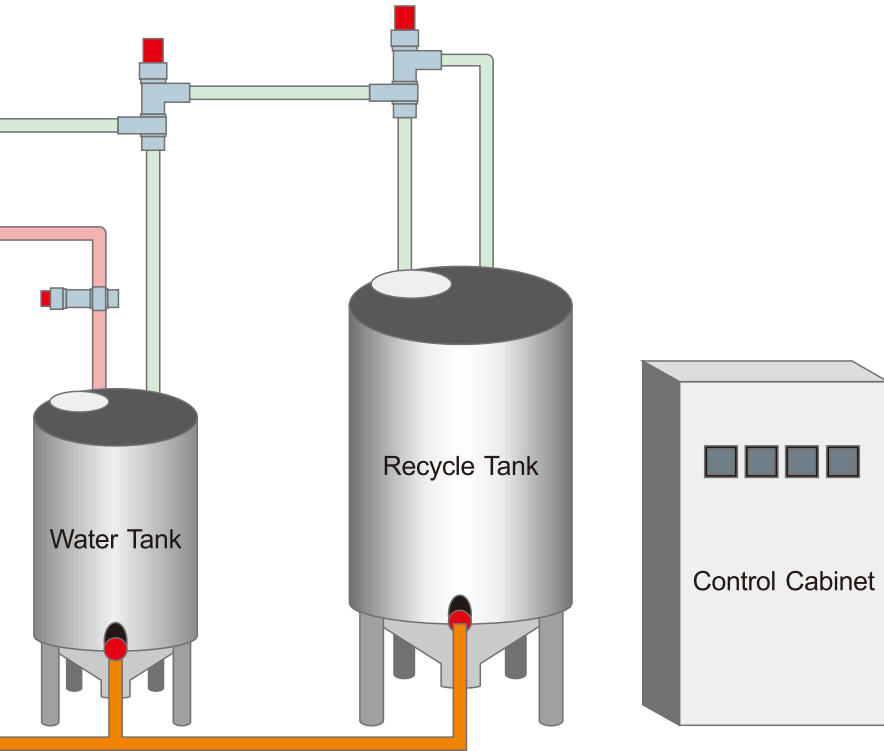



# Level Measurement

FineTek offers a wide range of liquid level detection sensors, with a variety of wetted materials, and there is always an applicable product can be used from a single chemical to unclear mixture of liquid that is incapable of analyzing.



## FGX Magnetic float level transmitter

Suitable for use in continuous liquid level monitoring in all types of tanks. Use low-power consumption "Loop Power" signal technology. The enclosure can be with Explosion Protection Type ia also available, and the length can be completely customized according to customer's needs, up to 30 meters.



## FCX/FDX Magnetic float level switch

Used for high and low positions control in the liquid tank with clear chemical properties of the liquid in the tank. Product body has a variety of materials (PVC, PP, PVDF, SUS304 / 316, etc.) can be selected and can do multiple liquid level control. The minimum specific gravity of the float can be applicable to 0.45 (comparing with water). The length can be set according to customer requirements (up to 6 meters).



### EGX Magnetostrictive level transmitter

Suitable for liquid level control in the CIP Cleaning System, SIP Sterilization System, and pharmaceutical equipment. High resolution, high accuracy, easy installation and no regular calibration and it maintenance required. High stability and reliability and it can be connected with PC to do the remote monitoring. Operating temperature -40 ~ 125°C.



### SIS Food grade sanitary intelling level switch

Used for high, low position alarm in production process tank or pipelines. The compact design to facilitate carrying and transporting, and can be quickly installed even in the area of narrow space or difficult operation. Suitable for use in the CIP and SIP cleaning applications, the surface roughness (Ra) level can be adjusted according to customer's needs, suitable for use in pharmaceutical and food processing industry applications.



### EAX4 Ultrasonic level transmitter

Suitable for liquid level monitoring in the tank, it's a non-contact measuring device with long service life. The product is two wire output, easy installation and measuring range is up to 8 meters with protection rating of IP67.



### ECX Pressure level transmitter

Used for high accuracy measurement of weak acid, lye liquid in the tank, the accuracy is up to 0.25%. Can be connected with the digital panel meters, recorder, computer, PLC program controller or alarm devices, etc with protection rating of IP65.



### SPX2 Thermal dispersion flow switch

Used for testing whether the liquid is flowing in the pipeline, the length of the flow sensing probe can be designed and manufactured in line with the size of pipe diameter, therefore the product is suitable for large or small pipe diameter. Maximum operating pressure is up to 100 Bars with three output methods for the customer's choice.



# Flow

In this world of substantial reduction of resources, environmental protection and energy conservation are with great urgency without delay. From industry, business to home, limited energy on the earth is consumed every day. In order to use the resources more effectively and reduce unnecessary waste, we offer a variety of flow measurement instruments to be used in different areas of equipment production process control and factory automation with high product precision, easy installation, and long maintenance cycle and low cost and equipped with a comprehensive flow measurement test laboratory to secure the final check for each flow meter.



## EPD Electromagnetic flow meter

Commonly used in all types of conductive liquids, can also be used in measuring the mixed liquid no with granules, no special requirements for temperature, pressure density and viscosity, and will not cause pressure loss for the fluid in the pipeline. Product precision is up to 0.1% with choice lining materials, and caliber ranging from DN15 to DN300.



## EPR Paddlewheel flow meter

The Paddlewheel Flow Meter is suitable for use with non-granule, non-sticky, neutral or corrosive liquids. Capable of displaying instantaneous flow and cumulative flow, measuring flow rate range of 0.3 ~ 10m/s, with good linearity.





# Solid Level Measurement

FineTek offers a wide range of material level detection sensors, with a variety of product designs, and there is always an applicable product can be used from a single switch control to the need of continuous signal output to warehouse inventory management.



## SBX RF-Capacitance/ Admittance level switch

Suitable for the detection of materials with viscosity, in other words, the switch is not affected by the attached material as it can effectively detect the high and low level of the materials of high viscosity in some of the mining storage tank. The product design includes high/low level switch failsafe protection, adjustable time delay function, and sensitivity adjustment signal. And with many different models suitable for use in high temperature, stirring or narrow space application.



## SAX Capacitance level switch

Used for storage tank high, low level detection of the pharmaceutical equipment with complete series of models, except to the standard type, high temperature type, there are also ultra-high temperature type, with the temperature up to 800°C, Plate-Probe type is suitable for lower position detection, type is suitable for large-size tank, explosion protection type is used in the place of explosion protection, this switch has no moving part, so it will not have mechanical wear and tear due to friction, and equipped with output operation delay function (0 ~ 6 seconds).



## JTR Guided wave radar level transmitter

Wave Guided Radar Level Meter uses advanced echo wave processing technology with a wide range of product applications that is capable of measuring the solid of low dielectric constant; and capable of measuring the solid level, liquid level and medium surface. The models including coaxial, rod and cable type for the customer's choice, suitable for use in high temperature and high pressure medium liquid level measurement.





# Temperature measurement

Temperature measurement is the most commonly monitored physical quantity in industrial control, both in pipeline and in storage tank. In addition to the need for production process, temperature measurement is also related to the factory safety, in recent years due to the development of digitization, temperature monitoring can easily obtain information of the site through certain signal transmitters, so that the control can be much more real-time.

FineTek offers a wide range of temperature sensing components and precision temperature transmitters, and supports compliance of the most commonly used HART protocol in the EU.

## TRX Series temperature transmitter

Use the electrical bridge to accurately detect the input signal, and then use the amplifier and the impedance converter to obtain a stable input signal.



## GP Platinum resistance thermometer

Wide applicable temperature range, with direct temperature measurement, good linearity, variable types, can be customized.



## GP Thermocouple thermometer


Suitable for use in high temperature and harsh environment, easy installation and use.



# FGX Magnetic float level transmitter

## OPERATING PRINCIPLE

The "Magnet Float Level Transmitter" is using the magnet in the float following the liquid level variation to change the bleeder circuit composed by the resistance and reed switch in the joint structure, the smaller gap between the reed switch, the higher the accuracy. The divider signal can be converted to 0/4 ~ 20mA or other different standard signal through the converter. The meter can be used for distant indication with other digital panel meters, is a liquid level meter with excellent reliability.

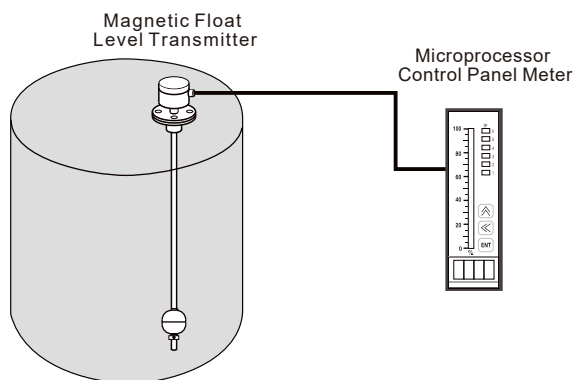

## FEATURES

- Various optional wetted materials.
- A variety of float specifications, also suitable for a variety of liquid with different specific gravity.
- Special reed packaging process, with better environmental durability.
- Can be used for the liquid level of ultra-light density.
- Suitable for use in the environment with pressure in the tank.
- Can be used for high temperature liquid.
- Accuracy is not affected by temperature, pressure, and changes in the measured object.



## SPECIFICATIONS

Wetted material	SUS316 / SUS316L
Operating temp.	<120°C
Supply voltage	Loop Power 12~36 Vdc
Linearity	>0.45 (comparing with water)
Pressure	30Bar (Max.)
IP rating	IP65
Explosion-proof	ATEX 2G Ex d IIB T6~T3 Gb (Optional)

※The specification is subject to the brochure.



## EGX Magnetostrictive level transmitter

High resolution, high accuracy, easy installation and does not need regular calibration and maintenance, stable and high reliability. Dirt and dust proof, high pressure resistance, seamless casing appearance constructed by corrosion-resistant stainless steel. Capable of connecting with PC to do the remote monitoring. Operating temperature is -40~200°C, capable of oil, water surface level, level detection output.

### APPLICATIONS

- Suitable for high temperature sterilization (200°C) environment
- Suitable for high pressure cleaning environment
- CIP Cleaning System
- SIP Sterilization System
- Pasteurization System
- Pharmaceutical Facility Application
- Beverage, Drinking Water, Edible Oil
- Food filling application and food liquid level control
- Temperature Measurement

### SPECIFICATIONS

Wetted material	SUS316/SUS316L
Measurement range	25mm-500mm
Temp. sensing	PT100
Operation voltage	12Vdc~30Vdc
Output current	4~20mA/20~4mA
Operation pressure	10bar(Max.)
Linearity	±100um@500mm or ±0.02% FS
Repeatability	±0.02% F.S
Ambient temp.	-40~85°C
Operating temp.	-40~125°C
Communication output	RS485
Surface cleanliness	Ra<0.3um, Ra<0.5um, Ra<0.8um
Enclosure protection rating	IP67(Housing)/IP69K(Probe)
Connection specifications	Food Grade Connection 1-1/2"~2"


※The specification is subject to the brochure.



# FDX Magnetic float level switch

## OPERATING PRINCIPLE

Set up one or more reed switches in a closed metal or plastic tube, and then pipe it through one or more hollow floats with ring magnet installed inside, and use the fixed ring to control and float and reed switch at the interrelated positions, so that the float floats goes up and down in a fixed range.

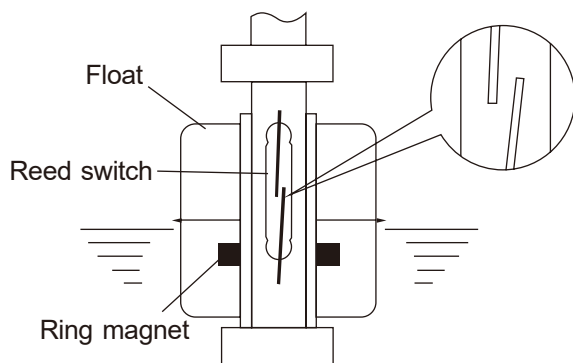

## FEATURES

- Control switch position can be customized.
- Contact lifetime is up to 2,000,000 times
- Enclosure protection rating above IP65.
- Wetted Material has PVDF□PP : SUS304 and SUS316, suitable for all types of liquid.
- Maximum Operating Temperature 200□
- Maximum Operating Pressure 50 Bars.



## SPECIFICATIONS

Float material	SUS304/ SUS316
Operating temp.	<200°C
Contact form	SPST-NO / SPST-NC / SPDT
Contact capacity	20W / 40W / 50W
Linearity	>0.5 (comparing with water)
Pressure	50bar (max.)
IP rating	IP65
Explosion-proof	ATEX 2G Ex d IIB T6~T3 Gb (Optional)

※The specification is subject to the brochure.





# JTR Guided wave radar level transmitter

## OPERATING PRINCIPLE

Guided wave radar level transmitter outputs electromagnetic pulse along with the cable or rod to propagate with the speed of light, when detected the surface of medium to be measured, the pulse will be partly reflected to form an echo wave and returned to the pulse transmission device through the same path, and the height of liquid level can be calculated. Guided wave radar level transmitter uses advanced echo wave processing technology with a wide range of product applications that is capable of measuring the solid of low dielectric constant; and capable of measuring the solid level, liquid level and medium surface. The product models include coaxial, rod, cable type for the customer's choice, suitable for use in the high temperature and high pressure medium liquid level measurement.

## FEATURES

- Meet the various measurement requirements of different temperature, pressure and medium.
- Contact measuring, capable of overcoming the steam, foam and stirring effects.
- 4~20 mA / 2-wire, simple wiring, low power consumption (2.4W max.).
- 128\*64 LCM Display, easy on-site adjustment.
- Display distance, level, percentage, current 4~20 mA.
- Unique algorithms and echo wave processing technology can be used various types of complicated applications.
- Echo wave graphics display function, to display the signal waveform inside the tank, can be used for background noise processing.
- Capable of simulating output current signal of 4mA, 20mA.

## SPECIFICATIONS

Power supply	16~36Vdc 2-Wire Loop Power, 16~36Vdc 4-Wire
Analog output	4~20mA
Measuring range	6m(Rod Type) 、30m(Cable Type)
Digital communication	HART 7.0 for 2-Wire, Modbus for 4-Wire
Enclosure	IP67
Explosion protection	Aluminum Alloy Material
Ambient temperature	-40~80°C
Operating temperature	-40~150°C
Accuracy	±5mm
Repeatability	±3mm
Operating pressure	0~60bar(25°C)

※The specification is subject to the brochure.



# TRX Economical type temperature transmitter

## OPERATING PRINCIPLE

Temperature Transmitter is using the electrical bridge to accurately detect the input signal, and then use the amplifier and the impedance converter to obtain a stable input signal. After using high-speed low-power microprocessors to perform linear curve conversion, through the isolated D/A converter to provide high-precision analog output signal.

## FEATURES

- Power Supply 24Vdc, 2-wire 4~20mA Output
- Input Signal Type: mV, V, mA, Thermocouples, RTD or Ohm.
- Disconnect and excess measuring range alarm current output.

## SPECIFICATIONS

Loop power	10~36 Vdc(Loop Power)
Input DC voltage	0~500mV, 0~1V, 0~5V, 0~10V, 0~20V
Input DC current	4~20 mA
Input thermocouples	K/ J/ T/ E/ R/ S/ B/ N
Input resistance / Thermocouples	PT100, 0~400W
Analog output	4~20 mA /20~4mA
Operating temperature	-40~85°C

※The specification is subject to the brochure.




Input Type	Measuring Range	Accuracy*
<b>Voltage</b>	-10~100mV	$\leq \pm 0.1\text{mV}$
<b>B</b>	250~1820°C	$\leq \pm 4^\circ\text{C}$
<b>E</b>	-200~1000°C	$\leq \pm 3^\circ\text{C}$
<b>J</b>	-210~1200°C	$\leq \pm 3^\circ\text{C}$
<b>K</b>	-200~1370°C	$\leq \pm 3^\circ\text{C}$
<b>N</b>	-200~1300°C	$\leq \pm 3^\circ\text{C}$
<b>R</b>	-50~1760°C	$\leq \pm 3^\circ\text{C}$
<b>S</b>	-50~1760°C	$\leq \pm 3^\circ\text{C}$
<b>T</b>	-200~400°C	$\leq \pm 2^\circ\text{C}$
<b>Resistor</b>	0~400Ω	$\leq \pm 0.4\Omega$
<b>PT100</b>	-200~850°C	$\leq \pm 0.5^\circ\text{C}$

# EAX4 Ultrasonic level transmitter

## OPERATING PRINCIPLE

The ultrasonic level transmitter is a non-contact, low-cost and easy-to-install measuring device. It can be applied to most industrial applications for liquids. Most important aspect of is that it is easy-to-install and low maintenance due to no moving parts.

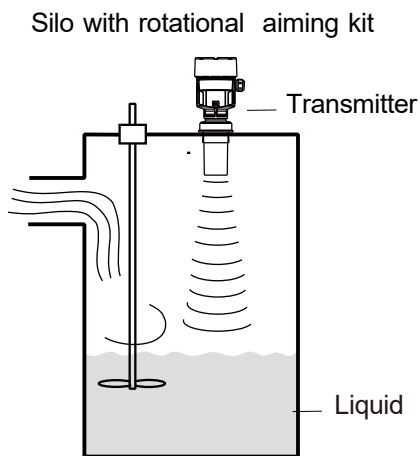

## FEATURES

- 4~20mA two-wire output.
  - 24Vdc power supply.
  - Casing protection IP67.
  - With integrated structure.
  - Probe material PVDF.
  - False echo detection.
  - 2"connection.
  - Non-contact measurement. Easy installation.
  - Fully isolated analog output.
  - With temperature compensation feature, which can improve measurement accuracy.
  - Beam angle: 5°
  - Not affected by liquid temperature, S.G, viscosity
- Maximum measurement range 8m (26 ft).

## SPECIFICATIONS

Frequency	50KHz
Operating Voltage	24VDC
Communications	4~20mA
Blanking Distance	300mm
Maxi. Range	8m
Resolution	1mm
Accuracy	±0.25%(full scale)
Operating Temperature	-40~80°C
Beam Angle	5°
Max. Operating Pressure	<0.1MPa
Typical Weight	1kg


※ The specification is subject to the brochure.



# ECX Pressure level transmitter

## OPERATING PRINCIPLE

The Ultrasonic Level Transmitter emits a strong sonic wave pulse to the medium to be measured. When the wave reflects off the material surface and back to the sensing probe, the reflected wave will be converted into electrical signal through the sensing probe and sent to the ultrasonic controller. The controller calculates the transmission time of sonic wave reflection and converts to level or distance.

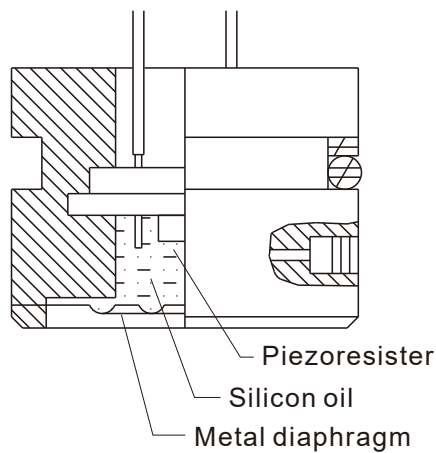

## FEATURES

- Can be used in the liquid and gas tank with viscous, weak acid and alkaline liquids, sewage water filth and impurities.
- Adopt stainless steel diaphragm, can be used for weak acid and alkaline liquids.
- The maximum operating temperature is up to 150°C.
- No measurement blind distance.
- Small linear error ( $\pm 0.25\%$  FS).
- Loop power, easy for wiring.
- Build-in temperature compensation, providing long-term signal stability.



## SPECIFICATIONS

Wetted material	Sensor: SUS304 / SUS316 Cable: PVC / FEP
Wetted temp. resistance	-10°C ~ 80°C / High temp. model 150°C
Power supply	Loop Power 13~36 Vdc
Linearity	$\pm 0.25\%$ of F.S.
Pressure resistance	0.1 ~ 10Bar
IP rating	IP65

※The specification is subject to the brochure.





# SIS Food Grade Sanitary Intelligent Level Switch

## OPERATING PRINCIPLE

Working principle of this sensor is based on the frequency sweep technology.

The sensor tip will send out electric field signal, and different resonance frequency is created according to different medium.

Thus a switching signal will be triggered if the sensor is covered with material.

## SPECIFICATIONS

Ambient temp.	-40~85°C(-40~185°F)
Operating temp.	Max, 100°C(Continuous) Ambient temp. -40~85°C(-40~185≤) Max, 150°C(Short Time 1h) Ambient temp. -40~60°C(-40~140°C)
Rated voltage	18~30Vdc
Overvoltage protection	Class 2 Over Voltage Protection
Output mode	(DC)PNP/NPN(Optional)
Delay time function (Optional)	<1 Second (Maximum 60 Seconds)
Output load current	Max, 100 mA
Electrical connections	M12 4PIN Connector
Casing material (Optional)	SUS304、 SUS316、 SUS316L
Operating pressure	-1~40 bar
Process connection (Optional)	G1/2、 G3/4、 G1
Probe material /Surface roughness (Optional)	PEEK/Ra<0.8 PEEK/Ra<0.6 PEEK/Ra<0.3
Casing protection rating	IP67/IP68/IP69K (IP68 Up to 1 Meter underwater, 30 days)
Standard compliance	IEC61000-4-2 IEC61000-4-4 IEC61000-4-11

※The specification is subject to the brochure.

## FEATURES

- Use standard connector for easy installation and protection rating of IP67/IP68/IP69K.
- The compact miniaturized design to facilitate carrying and transporting, and can be quickly installed even in the narrow space or difficult operation.
- Equipped with magnetic test operation function, capable of confirming the installation of wiring and equipment normal operation immediately.
- Strong and sturdy stainless steel housing.
- Equipped with LED indicator to facilitate the control of field equipment status.
- Equipped with over-current protection, turn off the output immediately when the output circuit over-current is detected automatically.
- Can be applied in CIP and SIP cleaning environments.
- Not affected by the foam and viscous medium.
- Provides two sets of individually set up sensitivity outputs to facilitate inspection measurement of two different mediums (for example, media divided with separate layers).
- This product is certified by U.S. Food and drug administration (FDA)
- Also available with NEPSI explosion-proof certification,
- Ex tD A20 IP67 T85°C T200 100°C
- Standard type: applicable for general materials.
- Extended type: suitable for materials which are with high viscosity and getting bridging easily.
- Compact type: designed for general materials and easy installation in narrow space.

## APPLICABLE PROCESSES

Incoming raw materials warehouse, pre-mixed storage warehouse, finished product storage warehouse



# SAX Capacitance level switch

## OPERATING PRINCIPLE

Use the sensing probe to detect the capacitance between the sensing probe and the tank wall (electrode to ground) with the material to be tested as medium, when the sensing probe is covered by the material, the capacitance is increased to reach the capacitance matching value set by the switch internal circuit, the circuit generates high-frequency resonance, detects the resonance signals, and convert to switch operation for the user operation.

## APPLICABLE PROCESSES

Incoming raw materials warehouse, pre-mixed storage warehouse, finished product storage warehouse

## SPECIFICATIONS

Power supply	110/220Vac $\pm 10\%$ or 19~24Vdc
Contact rating	SPDT 5A/250Vac/30Vdc, NPN crystal output
Probe material	SUS304/316, PP, PVDF coating
Connection	1"PT JIS 1-1/2"x5 Kg/cm <sup>2</sup> (other specification can be customized)
Operating temperature	-20~80°C(Max. 800°C)
Insulating material	UPE, PEEK, ceramic
Housing	IP65 aluminum alloy baking varnish
Sensitivity	10pF (Std)
Delay time setting	0~6 sec
Certificate-intrinsically	Safe Explosion Proof (optional)

※The specification is subject to the brochure.

## FEATURES AND applicable environment

Since the Capacitance Level Switch has simple structure without moving mechanical driving structure inside the switch, so it will not have mechanical wear and tear due to friction. Suitable for use in solid, powder or liquid materials. The connection uses screw thread for easy installation in all types of places. This series of products can be divided into following types according to the requirements of its structure and the places of use:

- Standard Type (SA110 & SA111 A/B/C)  
Suitable for general use.
- Hi-Temp Type (SA120 & SA128 A/B/C)  
Suitable for use in high temperature environment.
- Remote Probe Type (SA140 A/B/C)  
Suitable for use in vibrating place.
- Steel Wire Cable Probe Type (SA150 A/B/C)  
Suitable for use in large-size tank.
- Plate-Probe Type (SA160 A/B/C)  
Suitable for use with bulk material or at the lower position of large-size tank.
- Explosion Protection Type (SA270 ~ SA278)  
Passed flameproof and dust explosion protection accreditation, (Ex dia II C T4~T6, DIP A21 TA, T3~T6), suitable for use in the hazardous area of dust explosion.



# SBX RF-Capacitance / Dmittance Level Switch

## OPERATING PRINCIPLE

When the material touches the probe, the admittance between the probe and GND will increase, so that the variation of admittance can be used to determine the level of material. The guard section is placed between the probe and GND, its signal waveform is identical to the waveform of the probe, but these two are completely isolated, independent, so when it can inhibit the probe rod itself from the material attachment, since the admittance change of the probe and GND caused by the material attachment, the Level Switch only measures the admittance change between the probe and the tank wall, therefore, the false alarm from the material attachment can be eliminated.

## FEATURES

- Not affected by the material attachment
- Easy Installation and adjustment
- Excellent stability; Not affected by temperature
- Adjustable delay output 0~30 Seconds
- Casing Protection Rating of IP65
- DPDT, 5 A/250Vac contact output
- Max operating temperature is up to 550°C (Explosion Protection Type 450°C)
- Switchable High / Low failsafe alarm function
- Suitable for use in liquid, syrup, solid, granule, and surface level detection
- Alarm testing simulation
- Explosion protection type Ex d IIB T1~T6 (SB17 Series)

## APPLICABLE PROCESSES

Temporary storage tank and finished product tank of the sticky materials

## SPECIFICATIONS

Housing	Aluminum alloy baking varnish (IP5)
Probe material	SUS304 or 316
Insulation material	PTFE or ceramic
Connection	3/4" / 1"PT (other specification can be customized)
Sensitivity	0.3PF
Power supply	24Vdc±20% or 115/230Vac±10%, 50/60Hz
Power consumption	Max. 2 W
Outout contact	5A/250Vac, DPDT
Operating temperature	-40~150°C/550°C
Delay Time Setting	0-30s
Fail Safe Alarm	Low or high (switchable)
Cable gland	1/2"NPTx2
Operating pressure	ATM~ 20kg/cm <sup>2</sup>

※The specification is subject to the brochure.



# SPX2 Thermal dispersion flow switch

## OPERATING PRINCIPLE

Digital Thermal Dispersion Flow Switch detection feature is mainly used where the medium is liquid. Due to different application requirements in the working environment, various models are used, for example, standard type, extended type etc. Two temperature sensing elements are placed in the pipeline. One is heated and the other is not, resulting in a difference in temperature. When the liquid medium flows past the two elements, heat energy is taken away and the temperature of the heated element will fall. The flow rate of the liquid medium is thus calculated according to the difference in temperature of the two elements.

## FEATURES

- Thermal dispersion flow switches have higher sensitivity when compared with traditional mechanical switches.
- Three signal output methods for customers to choose from.
- Unlimited installation locations.
- Will not wear off the structure; liquids containing impurities can still be measured.
- The length of the flow sensor rod can be adjusted according to the environment. The pipe diameter can also be adjusted and used in a wide range of applications.
- Replaced the knob with buttons for easier adjustment.
- Digital interface which can be quickly set by using the buttons.
- Multi-segment display with 10 LEDs to sense the liquid flow rate more accurately.

## SPECIFICATIONS

Flow rate range	Water: 1 to 150cm / s
Medium temp.	-20~85°C
Ambient temp.	-20~80°C
Operating pressure	100 bar (max.)
Power consumption	150mA (max. at 24Vdc)
Time to warm-up	15 seconds
Protection level	IP67
Connection thread	G1/2
Alarm output	Open: NPN/PNP (250mA) Relay:0.3A@125Vac, 1A@30 Vdc (NO or NC)



※The specification is subject to the brochure.



# EPR Paddlewheel flow meter

## OPERATING PRINCIPLE

The working principle of the Paddle Wheel Flow Meter is to measure the flow velocity by using the fluidic to drive the blade rotation, and calculates the flow based on the flow velocity. ERP1 series flow meter consists of flow transmitter and pipes. The light and compact design allows the user to carry, install and operate it conveniently. The sensor is calibrated by the FineTek's professional flow test laboratory to calculate the K value with accuracy reaching  $\pm 3\%$  and excellent linearity can be obtained at the blade flow rate of 0.3 ~10m/s. Display and non-display types are both available for the sensor digital panel meters. The display type has the design of built-in accumulated flow storage to facilitate the user accessing the data.

## SPECIFICATIONS

Type	Intelligent All-in-One Model / Non-Display Model / Pulse Output Model
Applicable pipe diameter	DN20 、DN25 、DN40 、DN50
Flow rate range	0.3~10m/s
Accuracy	$\pm 3\%$ under standard K value
Measuring principle	Magnetic induction
Operating temp.	Engineering plastics: -15°C~60°C(5°F~140°F) Stainless steel: -15°C~100°C(5°F~212°F)
Protection rating	IP66, the connector shall be connected and securely fastened
Analog output	4~20mA
Power supply voltage	12~36Vdc $\pm 10\%$
Communication Interface	RS485 Modbus

※The specification is subject to the brochure.

## FEATURES


- LCM Graphic Display with 128x64 pixels, to facilitate the operation and understanding of the control status with NPN and PNP transistor output.
- Analog output: 4-20mA
- Wide output voltage range
- Built-in FRAM (Ferroelectric Random Access Memory) for Accumulated Flow Storage
- Communication Interface RS485 Modbus



# EPD Electromagnetic flow meter

## OPERATING PRINCIPLE

The measuring principle of the Electromagnetic Flow Meter is based on the Faraday's law of electromagnetic induction, when the conductive liquid in the magnetic field flows perpendicular to the direction of the magnetic field, it will cut the magnetic field lines and produce induced voltage, this induced voltage and flow rate are in linear relationship, so that the fluid volume flow can be calculated.

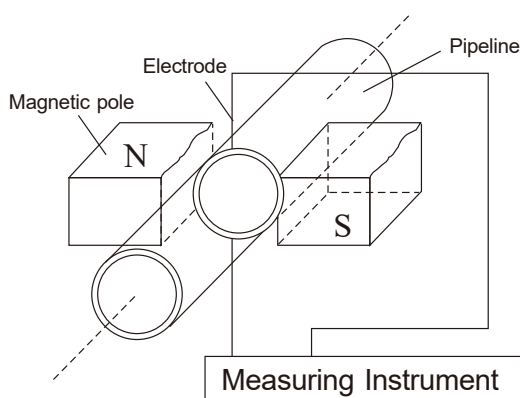

## FEATURES

- Not affected by the density, viscosity, pressure, conductivity and other variations when measuring the liquid.
- Capable of measuring the liquid with granules and can be measured with particles and suspended solid.
- Enclosure protection rating is up to IP67 NEMA 4X.
- There are a variety of options for the lining materials, suitable for all types of acid and alkaline environment.



All-in-One Model

## SPECIFICATIONS

Accuracy	$\pm 0.5\%$ , $\pm 0.3\%$ , $\sqrt{0.2\%}$
Medium temp.	20°C~120°C(PTFE Lining)
Ambient temp.	-40°C~70°C
IP rating	IP67/NEMA4X
Electrode material	Stainless steel, Hastelloy, titanium, tantalum
Lining material	PTFE, Synthetic rubber, neoprene
Flange material	Carbon steel
Analog output	4~20mA, 2~8KHz
Communication interface	RS485
Supply voltage	AC100~240Vac/240Vdc

※ The specification is subject to the brochure.



Stand Alone Model

# GPX/GKX Thermocouple

## THERMOCOUPLE

Connects two metal conductors of different materials electrically to produce a closed circuit, heats the welding end to product temperature difference, there will be current flow in the loop reaction, this phenomenon is called "Seebeck-effect".

## RESISTANCE TEMPERATURE DETECTORS

The resistance of general metal conductor changes with the temperature variation, use the property of this temperature coefficient can obtain the temperature through the change of resistance.

## SPECIFICATIONS

Measuring range	0-1200°C
Accuracy	0.3%(PT), 0.75%
IP rating	IP65
Isolation resistance	>1000 MW
Wetted material	SUS304,SUS316,Ti,PTFE


※The specification is subject to the brochure.

## FEATURES

- Wide temperature measurement range up to 1200°C.
- Quick response, minimum by the time difference.
- Temperature is detected by thermo-electromotive force; temperature measurement, adjustment, conversion and other signal processing are easier.
- The price of thermocouple is favourabler than other temperature components.
- Reproducibility of platinum resistance thermometer (PT) is high.



# Global Network

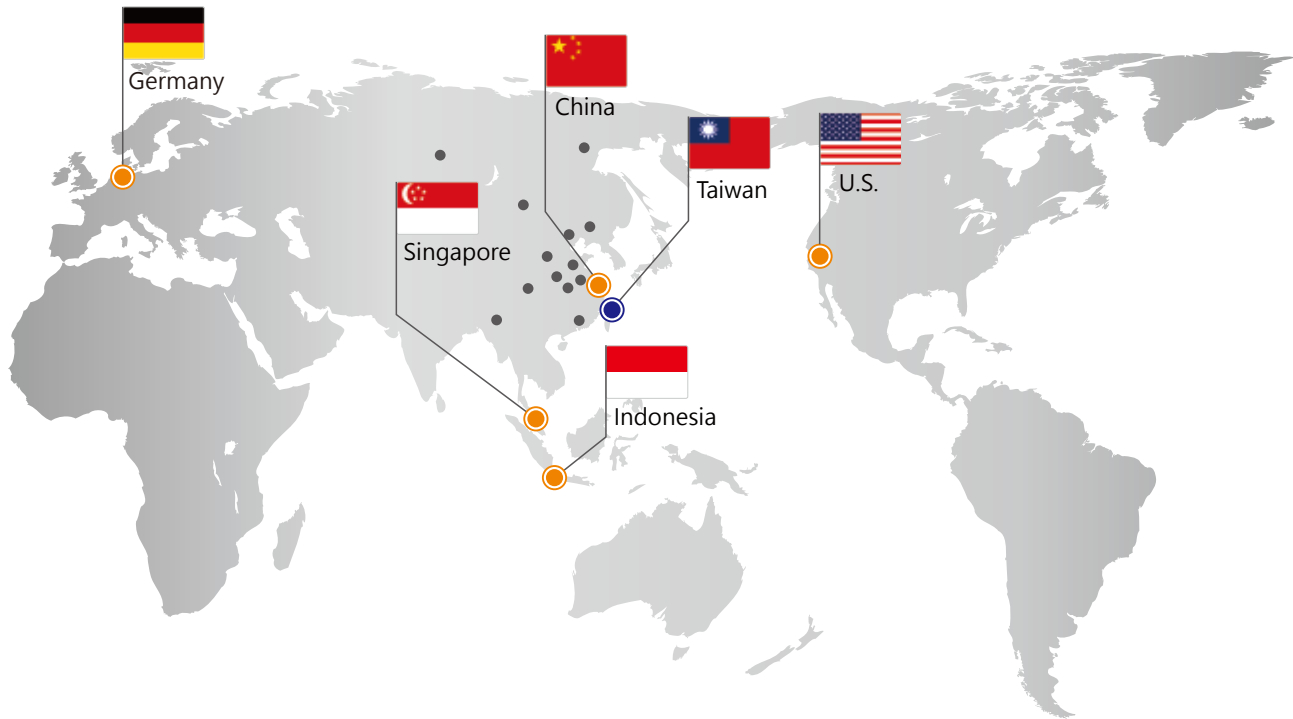

## ■ Head Quarter

- Taiwan  
FineTek Co., Ltd. - Taipei Head Quarter  
No.16, Tzuchiang St., Tucheng Industrial Park  
New Taipei City 236, Taiwan  
TEL: 886-2-2269-6789  
FAX: 886-2-2268-6682  
EMAIL: info@fine-tek.com

## ■ North America

- California, U.S.  
Aplus Finetek Sensor Inc. - US Office  
355 S. Lemon Ave, Suite D  
Walnut, CA 91789  
TEL: 1 909 598 2488  
FAX: 1 909 598 3188  
EMAIL: info@aplusfine.com

## ■ Europe

- Germany  
FineTek GmbH - Germany Office  
Bei den Kämpen 26  
21220 Seevetal-Ramelsloh, Germany  
TEL: +49-(0)4185-8083-12  
FAX: +49-(0)4185-8083-80  
EMAIL: info@fine-tek.de

## ■ Asia

- China  
Fine automation Co., Ltd. - Shanghai Factory  
No.451 DuHui Rd, MinHang District, Shanghai,  
China 201109  
TEL: 86-21-6490-7260  
EMAIL: info.sh@fine-tek.com
- Singapore  
FineTek Pte Ltd. - Singapore Office  
37 Kaki Bukit Place, Level 4 Singapore 416215  
TEL: 65-6452-6340  
EMAIL: info.sg@fine-tek.com
- Indonesia  
PT. FineTek Automation Indonesia - Indonesia Office  
PERGUDANGAN TUNAS BITUNG  
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15,  
Bitung Cikupa, Tangerang 15710  
TEL: 62 (021)-2958-1688  
EMAIL: info.id@fine-tek.com



Distributor: