





EPR5 Paddle Wheel Flow Meter



FineTek Flow Lab

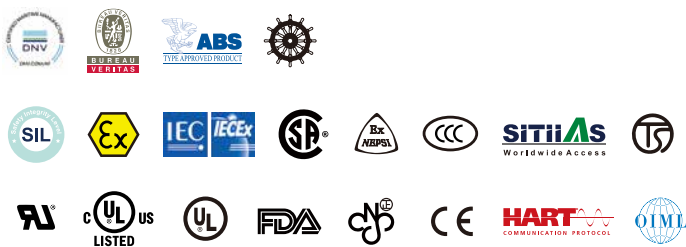

FineTek is the company who owns a Second Class flow test laboratory in Taiwan. With the most professional R&D team, FineTek develops various high precision flow meters and related parts. Moreover, FineTek is certificated and constantly validated by First Class accreditation organization, the Flow Laboratory of the National Measurement Laboratory, R.O.C (Center for Measurement Standards, ITRI), which is approved to guarantee the accuracy on the flow measurement in each delivery. The TAF flow laboratory of FineTek has been certificated and approved by Taiwan Accreditation Foundation (TAF) and conforms to the regulations of international organizations such as ILAC and APALC. It has the complete ability to conduct uncertainty testing and rating for flow test.

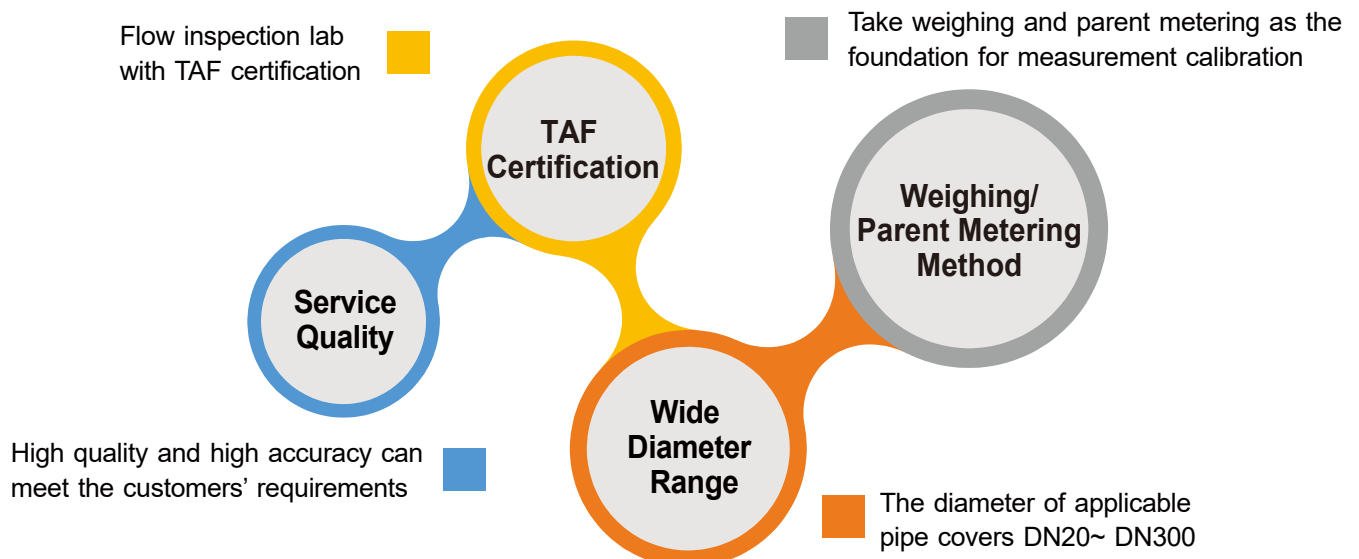

EPR PADDLE WHEEL FLOW METER

WORKING PRINCIPLE

The Paddle Wheel Flow Meter measures the flow velocity by using the fluidic to drive the blade rotation, and calculates the flow rate based on the flow velocity. ERP5 series flow meter consists of flow transmitter and pipe fitting. The light and compact design allows the user to carry, install and operate it conveniently. The product is calibrated by professional flow test device, with the accuracy of K value reaching $\pm 3\%$. The measuring range is 0.3 ~10m/s, with high linearity. Display and non-display type are both available. The display type is built-in with accumulated flow storage device.

FEATURES

- Microprocessor-controlled, with complete functions that are easy to operate.
- Analog signal 4-20mA current output or 0-5V voltage output
- With communication interface Rs485.
- Analog output range increased by 10%: 4-21.6mA.
- Simulation test output: 0-24mA.
- Pulse wave output: 2 sets of NPN transistor output.
- Simulation frequency output: 0-300Hz.
- LCM display (Graphic 128x64 Dots).
- Display has built-in cumulative flow FRAM flash memory.
- Quick release design between display and sensor.
- LED to indicate the alarm status.
- Analog output flow rate and flow rate filtering setting: 0-400 segments.
- LED display backlight with three modes: ON/OFF/ACTIVE operations.
- Parameter settings (K factor, pipe diameter, device ID, baudrate).
- Supports Traditional Chinese, Simplified Chinese, English, etc.

APPLICATIONS



The Paddle Wheel Flow Meter is applicable to neutral or corrosive liquids that are non-granular or non-viscous. It connects with an analog output and pulse output signal to form a monitoring system, which can display instantaneous flow and accumulated flow. Moreover, it can form a control circuit to adjust the valve or operate the switch.

※Iron chips that stick onto the impellers during rotation will affect the measurement and damage the equipment. Iron shavings may be generated during processing or when the pumps are running. A magnetic sieve or filter must be installed upstream at a distance of >15 times the pipe diameter (take into consideration pressure loss too) and cleaned regularly to prevent blocking.

- Food industry
- Beverage industry
- Water treatment industry
- Pharmaceutical industry
- Dyeing industry
- Chemical industry
- PCB wet process control
- Semi-conductor industry

STANDARD SPECIFICATIONS

PVC Pipe material & PP Blade

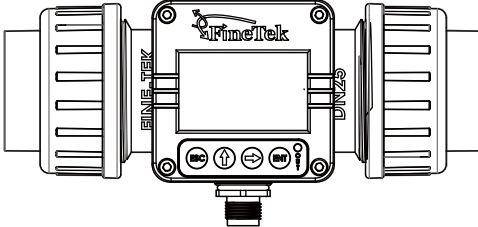
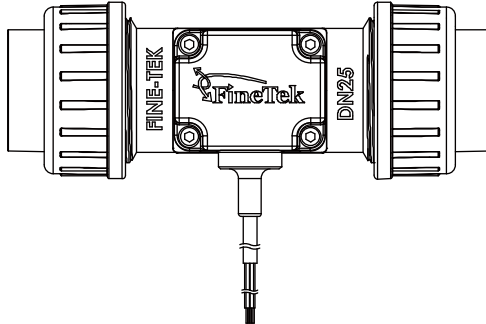
Model Type	 	
Specification	With display type	Without display type
Applicable pipe diameter	DN15、DN20、DN25、DN40、DN50	
Pipe material	PVC	
Flow velocity range	0.3~10m/s	
Accuracy	Under standard K Factor $\pm 3\%$ F.S. (Flow velocity 6~10m/s reach $\pm 0.5\%$)	
Repeatability	$\pm 0.4\%$	
Measuring principle	Magnetic sensing	
Viscosity range	300 cSt, max.	
Impurity range	Must be nonmagnetic, 1%, max.(Size of particles 0.5mm max.)	
Process temperature	$-15^{\circ}\text{C}\sim 60^{\circ}\text{C}$ ($5^{\circ}\text{F}\sim 140^{\circ}\text{F}$)	
Ambient humidity	<80%, no-condensation	
Installation method	Transmitter + T-fitting	
Process pressure	10bar, max.	
IP rating	IP66, the connector shall be inserted and fastened	IP65
Analog output	4~20mA(150W max.) or 0~5V(10KW min.)	
Pulse output	NPN Pulse output*2 /32Vdc Max	NPN Pulse output*1 /32Vdc Max
Frequency range	0~300Hz	N/A
Display	LCM,128*64 · Backlit	N/A
Power supply voltage	10~32Vdc	
Power consumption	< 1.5VA	
Communication port	RS485,Modbus(Optional)	N/A
Accumulated flow storage device	16K,FRAM	NO

※1st NPN Pulse Output - Rotor Pulse Output

※2nd NPN Pulse Output - You can choose between "Unit Flow Pulse Output," "Accumulated Flow Alarm Output," or "Flow Rate Alarm Output."

STANDARD SPECIFICATIONS

SUS Pipe material & PVDF Blade

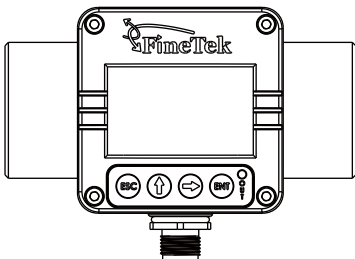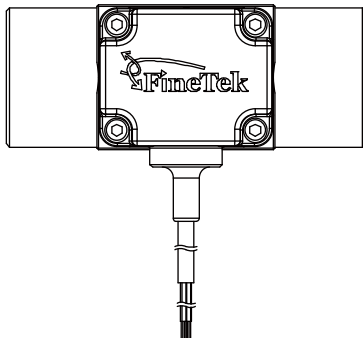
Model Type		
Specification	With display type	Without display type
Applicable pipe diameter	DN20 、DN25 、DN40 、DN50	
Pipe material	SUS304 、SUS316 、SUS316L	
Flow velocity range	0.3~10m/s	
Accuracy	Under standard K Factor $\pm 3\%$ F.S. (Flow velocity 6~10m/s reach $\pm 0.5\%$)	
Repeatability	$\pm 0.4\%$	
Measuring principle	Magnetic sensing	
Viscosity range	300 cSt, max.	
Impurity range	Must be nonmagnetic, 1%, max.(Size of particles 0.5mm max.)	
Process temperature	$-15^{\circ}\text{C}\sim 100^{\circ}\text{C}$ ($5^{\circ}\text{F}\sim 212^{\circ}\text{F}$)	
Ambient humidity	<80%, no-condensation	
Installation method	Transmitter +T-fitting	
Process pressure	10bar, max.	
IP rating	IP66, the connector shall be inserted and fastened	IP65
Analog output	4~20mA(150W max.) or 0~5V(10KW min.)	
Pulse output	NPN Pulse output*2 /32Vdc Max	NPN Pulse output*1 /32Vdc Max
Frequency range	0~300Hz	N/A
Display	LCM,128*64 · Backlit	N/A
Power supply voltage	10~32Vdc	
Power consumption	< 1.5VA	
Communication port	RS485,Modbus(Optional)	N/A
Accumulated flow storage device	16K,FRAM	NO

※1st NPN Pulse Output - Rotor Pulse Output

※2nd NPN Pulse Output - You can choose between "Unit Flow Pulse Output," "Accumulated Flow Alarm Output," or "Flow Rate Alarm Output."

STANDARD SPECIFICATIONS

SUS Pipe material & SUS316 Blade

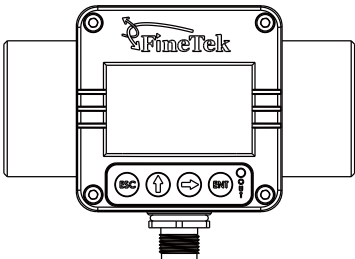
Model Type	
Specification	With display type
Applicable pipe diameter	DN25 、DN40
Pipe material	SUS304 、SUS316 、SUS316L
Flow velocity range	0.5~8m/s
Accuracy	standard K Factor $\pm 3\%$ F.S.
Repeatability	$\pm 0.4\%$
Measuring principle	Magnetic sensing
Viscosity range	300 cSt , max.
Impurity range	Must be nonmagnetic, 1%, max. (Size of particles 0.5mm max.)
Process temperature	-15°C~100°C (5°F~212°F)
Ambient humidity	<80%, no-condensation
Installation method	Transmitter +T-fitting
Process pressure	10bar, max.
IP rating	IP66, the connector shall be inserted and fastened
Analog output	4~20mA(150W max.) or 0~5V(10KW min.)
Pulse output	NPN Pulse output*2 /32Vdc Max
Frequency range	0~300Hz
Display	LCM,128*64 · Backlit
Power supply voltage	10~32Vdc
Power consumption	< 1.5VA
Communication port	RS485,Modbus(Optional)
Accumulated flow storage device	16K,FRAM

※1st NPN Pulse Output - Rotor Pulse Output


※2nd NPN Pulse Output - You can choose between "Unit Flow Pulse Output," "Accumulated Flow Alarm Output," or "Flow Rate Alarm Output."

DIMENSIONS

WITH DISPLAY

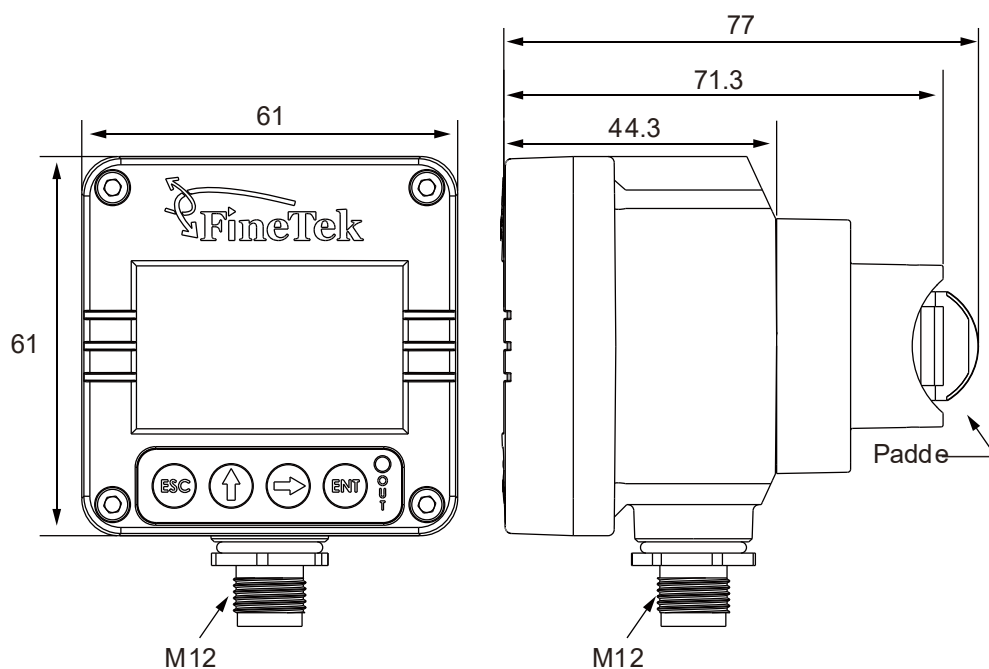


WITHOUT DISPLAY

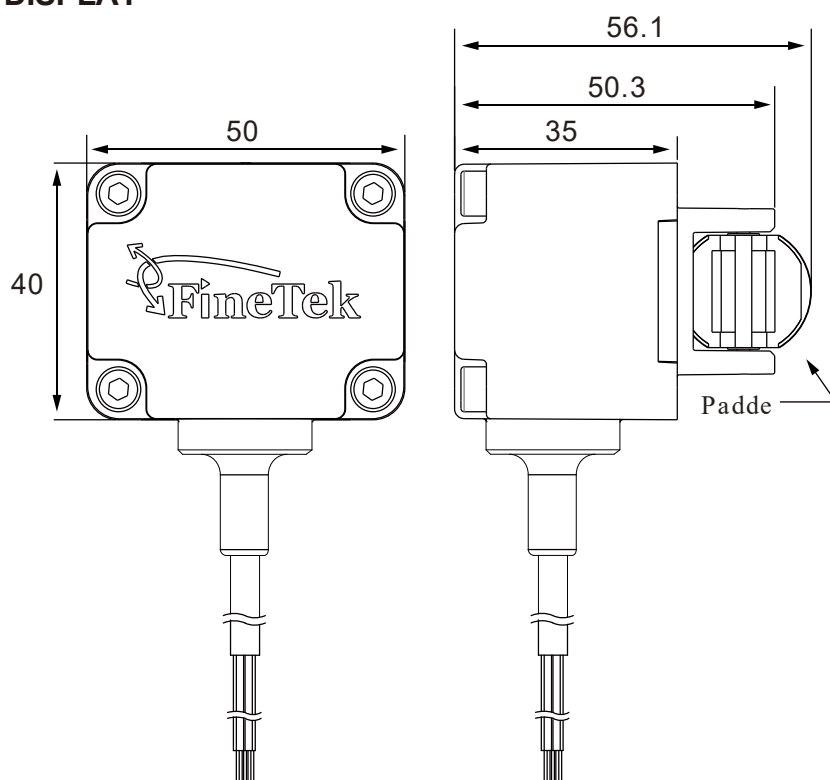


DIMENSIONS

WITH DISPLAY (ENGINEERING PLASTICS)

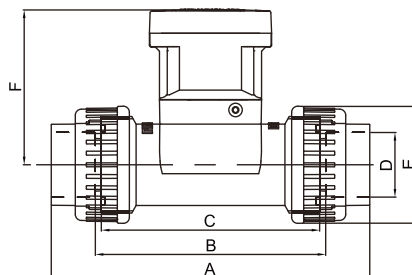

Diameter-DN (mm)	Pipe standards	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
15	DIN/ISO ASTM JIS	128	96	90	20 21.3 18.4	43	79.1
20	DIN/ISO ASTM JIS CNS 4053-1	144	106	100	25 26.7 26.45 26	53	76.3
25	DIN/ISO ASTM JIS	159	115	109	32 33.4 32.55	58	77
40	DIN/ISO ASTM JIS	189	125	119	50 48.3 48.7	83	83.9
50	DIN/ISO ASTM JIS CNS 4053-1	216	140	130	63 60.3 60.8 60	103	90


WITH DISPLAY (STAINLESS STEEL)



Diameter-DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)
20	94	17 18.3 18.3	PF 3/4" PT 3/4" NPT 3/4"	77
25	104	23 18 18	PF 1" PT 1" NPT 1"	77
40	129	23 22 22	PF 1-1/2" PT 1-1/2" NPT 1-1/2"	83.4
50	148.5	27.5 24 24	PF 2" PT 2" NPT 2"	90


DIMENSIONS

WITHOUT DISPLAY (ENGINEERING PLASTICS)

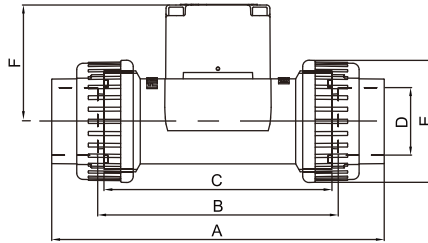

Diameter-DN (mm)	Pipe standards	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)
15	DIN/ISO ASTM JIS	128	96	90	20 21.3 18.4	43	48.4
20	DIN/ISO ASTM JIS CNS 4053-1	144	106	100	25 26.7 26.45 26	53	54.8
25	DIN/ISO ASTM JIS	159	115	109	32 33.4 32.55	58	55.2
40	DIN/ISO ASTM JIS	189	125	119	50 48.3 48.7	83	62
50	DIN/ISO ASTM JIS CNS 4053-1	216	140	130	63 60.3 60.8 60	103	68.5


WITHOUT DISPLAY (STAINLESS STEEL)



Diameter-DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)
20	94	17 18.3 18.3	PF 3/4" PT 3/4" NPT 3/4"	55
25	104	23 18 18	PF 1" PT 1" NPT 1"	55.6
40	129	23 22 22	PF 1-1/2" PT 1-1/2" NPT 1-1/2"	62
50	148.5	27.5 24 24	PF 2" PT 2" NPT 2"	69


DIMENSIONS

T-FITTING(ENGINEERING PLASTICS)

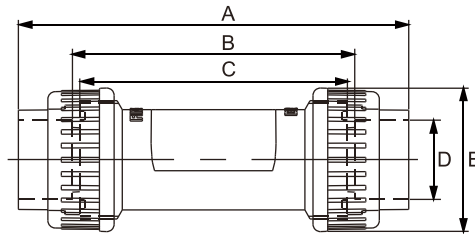

Diameter-DN (mm)	Pipe standards	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)
15	DIN/ISO ASTM JIS	128	96	90	20 21.3 18.4	43
20	DIN/ISO ASTM JIS CNS 4053-1	144	106	100	25 26.7 26.45 26	53
25	DIN/ISO ASTM JIS	159	115	109	32 33.4 32.55	58
40	DIN/ISO ASTM JIS	189	125	119	50 48.3 48.7	83
50	DIN/ISO ASTM JIS CNS 4053-1	216	140	130	63 60.3 60.8 60	103

T-FITTING (STAINLESS STEEL)

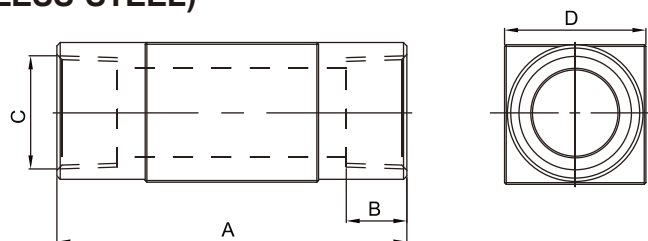

Diameter-DN (mm)	A (mm)	B (mm)	C (mm)	D (mm)
20	94	17 18.3 18.3	PF 3/4" PT 3/4" NPT 3/4"	42
25	104	23 18 18	PF 1" PT 1" NPT 1"	55.6
40	129	23 22 22	PF 1-1/2" PT 1-1/2" NPT 1-1/2"	62
50	148.5	27.5 24 24	PF 2" PT 2" NPT 2"	72

TECHNICAL PARAMETER

SELECTING FLOW AND PIPE DIAMETER

Plastic Blade

Material	Pipe diameter (mm)	Flow Range (m³/h)	
		Flow velocity 0.3m/s (min)	Flow velocity 10m/s (max)
PVC Pipe material & PP Blade	15	0.19	6.36
	20	0.34	11.31
	25	0.53	17.67
	40	1.35	45.23
	50	2.12	70.68
SUS Pipe material & PVDF Blade	20	0.34	11.31
	25	0.53	17.67
	40	1.35	45.23
	50	2.12	70.68

Stainless Blade

Material	Pipe diameter (mm)	Flow Range (m³/h)	
		Flow velocity 0.5m/s (min)	Flow velocity 8m/s (max)
SUS Pipe material & SUS316 Blade	25	0.89	14.13
	40	2.27	36.18

RELATIONSHIP BETWEEN K VALUE AND FITTING DIAMETER □

With Display

Material	Connection & Standard Type	K Factor (Pulse/Liter)				
		DN15	DN20	DN25	DN40	DN50
PVC Pipe material & PP Blade	DIN/ISO	114.8	74.5	50.5	16.58	9.7
	ASTM	114.8	74.5	50.5	16.58	9.7
	JIS	114.8	74.5	50.5	16.58	9.7
	CNS 4053-1	— — —	74.5	— — —	— — —	9.7
SUS Pipe material & PVDF Blade	Thread PF	114.8	74.5	50.5	16.58	9.7
	Thread PT	114.8	74.5	50.5	16.58	9.7
	Thread NPT	114.8	74.5	50.5	16.58	9.7
SUS Pipe material & SUS316 Blade	Thread PF	— — —	— — —	58	16.25	8.8
	Thread PT	— — —	— — —	58	16.25	8.8
	Thread NPT	— — —	— — —	58	16.25	8.8

※ US: GL (Gallon) K factor = Pulse/Liter × 3.785; UK: GL (Gallon) K factor = Pulse/Liter × 4.546.


TECHNICAL PARAMETER

Without Display

Material	Connection & Standard Type	K Factor (Pulse/Liter)				
		DN15	DN20	DN25	DN40	DN50
PVC Pipe material & PP Blade	DIN/ISO	105.8	60.5	35.4	11.05	6.84
	ASTM	105.8	60.5	35.4	11.05	6.84
	JIS	105.8	60.5	35.4	11.05	6.84
	CNS 4053-1	— — —	60.5	— — —	— — —	6.84
SUS Pipe material & PVDF Blade	Thread PF	105.8	60.5	35.4	11.05	6.84
	Thread PT	105.8	60.5	35.4	11.05	6.84
	Thread NPT	105.8	60.5	35.4	11.05	6.84


※ US: GL (Gallon) K factor = Pulse/Liter × 3.785; UK: GL (Gallon) K factor = Pulse/Liter × 4.546.

CONTROL SYSTEM DIAGRAM

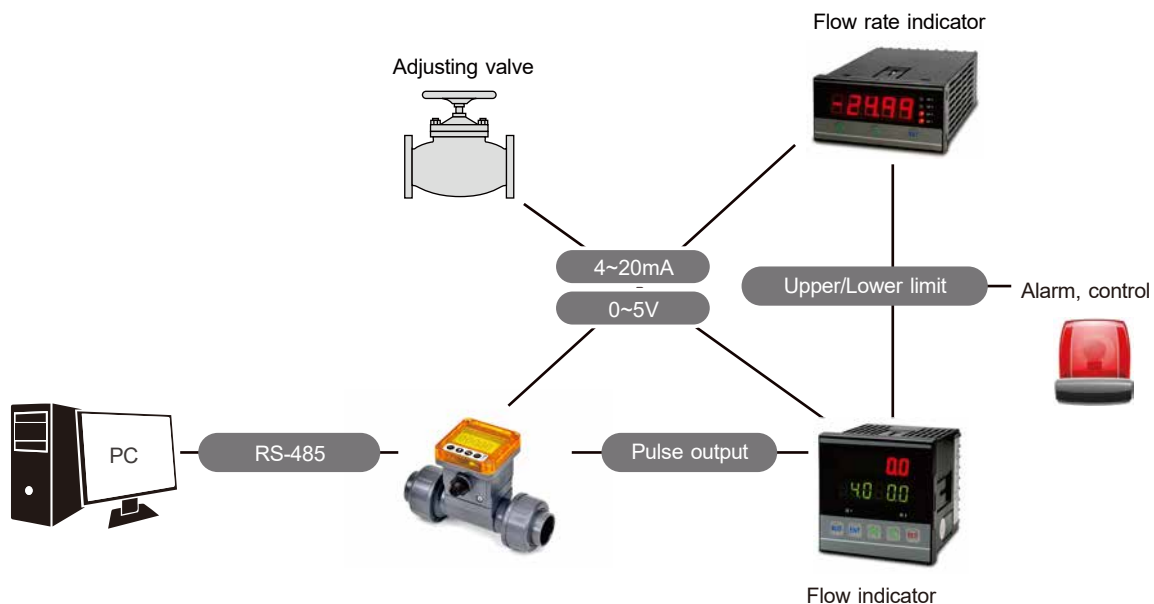

TRANSMITTER INSTALLATION

INTELLIGENT ALL-IN-ONE MODEL

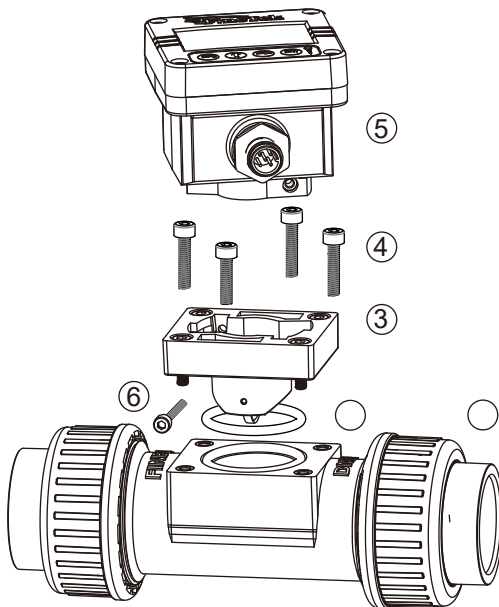


Installation steps

- 1.T-fitting of flow meter.
2. Place the O-shaped ring in the sealing tank, and unfold it naturally.
- 3.Make the blade holder face downward and go through the hole and O-shaped ring. Level and align it.
- 4.Fasten and align the 4 screws evenly with the
*Fastening torque:
Plastic Blade = 8~10kgf-cm(0.784~0.98N.m)
Stainless Blade = 10~12kgf-cm(0.98~1.176N.m)
- 5.Point the M12 connector of the display towards you, and insert it into the slot. Level it horizontally and rotate it clockwise to the edge for alignment.
- 6.Fasten the 2 fixing screws.
*Fastening torque=6~8kgf-cm(0.588~0.784N.m)

*Note: The above steps are for whole machine installation. To install the header only, please perform steps 5~6. Please apply the fastening torque on the screws as required.

FLOW TRANSMITTER MODEL & PULSE OUTPUT MODEL

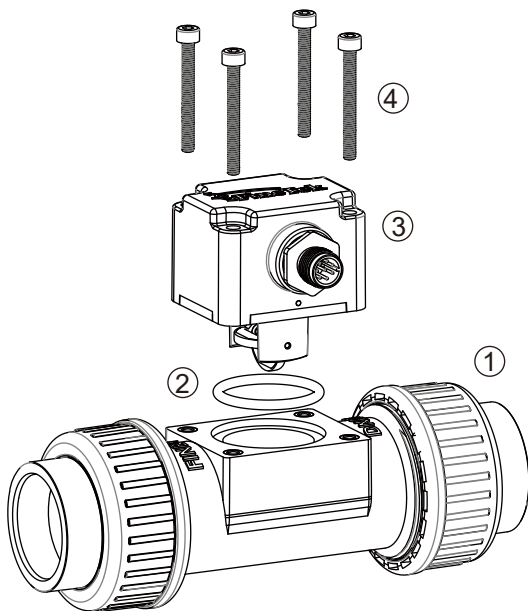

Installation steps


- 1.T-fitting of flow meter.
- 2.Place the O-shaped ring in the sealing tank, and unfold it naturally.
- 3.Make the blade of the transmitter face downward and go through the hole and O-shaped ring. Level and align it.
- 4.Fasten and align the 4 screws evenly.
*Fastening torque:
Plastic Blade = 8~10kgf-cm(0.784~0.98N.m)
Stainless Blade = 10~12kgf-cm(0.98~1.176N.m)

*Note: Please apply the fastening torque on the screws as required.


WITH DISPLAY

M12 CONNECTOR

Connector socket



Plug

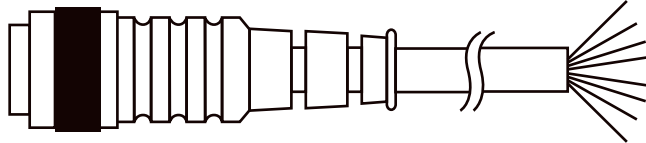

Cable

The colors of the cables and the pins of the M12 connecting socket are as shown in the table:

Cable No..	Function	Cable Color
1	Analog output 4~20mA - or analog output 0~5V - or communication output RS485 -	Black
2	Analog output 4~20mA + or analog output 0~5V + or communication output RS485 +	Yellow
3	Power input DC 0V -	Blue
4	Pulse Out 1	Orange
5	--	Green
6	--	Purple
7	Pulse Out 2	Red
8	Power input DC 10~32V +	Brown

※Pulse out1: Orange line: "rotor pulse output"

※ssssssssPulse out2: For the red line, "unit flow pulse output," "accumulated flow alarm output" or "flow rate alarm output" can be selected.

WIRING

Analog output 4~20mA	Analog output 0~5V	Communication output RS485	Pulse out


WITHOUT DISPLAY

The colors of cables are defined as shown in the table:

Cable No.	Function	Cable Color
1	Power input DC 10~32V +	Brown
2	Power input DC 0 V -	Blue
3	Analog output 4~20mA + or analog output 0~5V +	Yellow
4	Analog output 4~20mA - or analog output 0~5V -	White
5	Pulse Out	Gray













※Pulse out: White line: rotor pulse output

WIRING

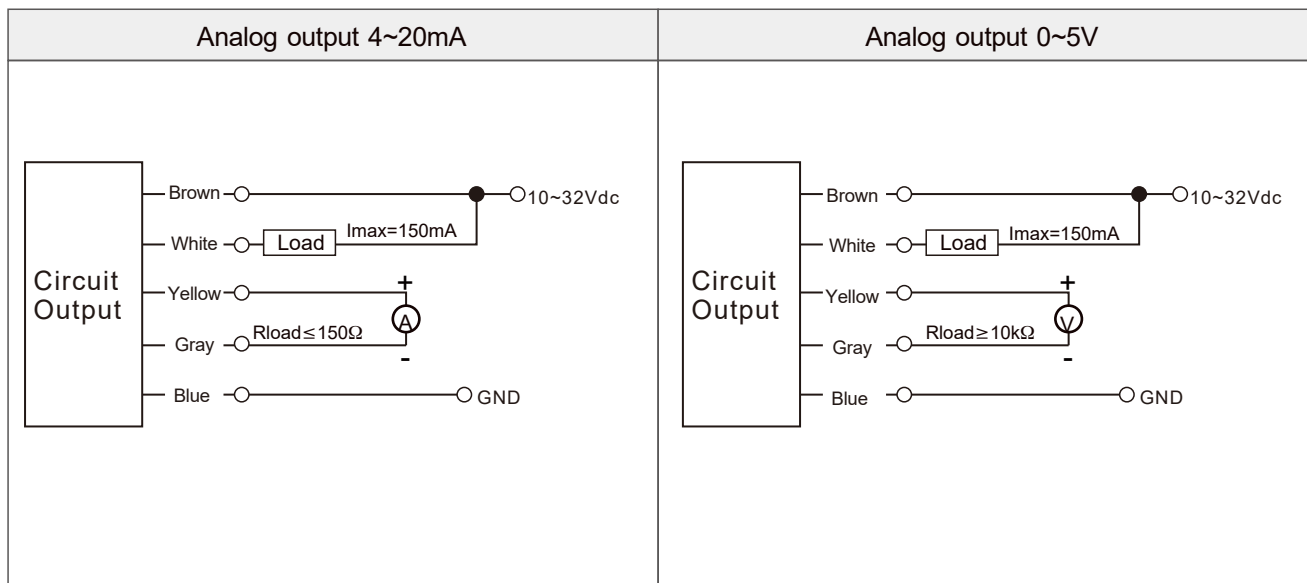


REQUIREMENTS FOR STRAIGHT PIPE SECTION

The straight pipe must be long enough on the upstream side and downstream side where the flow meter is installed. This can obtain an evenly distributed and stable flow field so as to guarantee the measuring accuracy. When installing the flow meter, please choose optimal distance based on the pipe dimension and field environment. Generally, the longer the section of the straight pipe is, the better. The table below lists the minimum distance based on the times of D(D=pipe diameter).

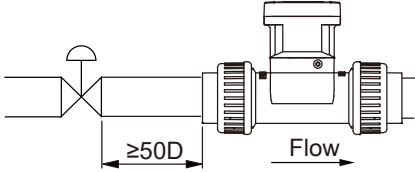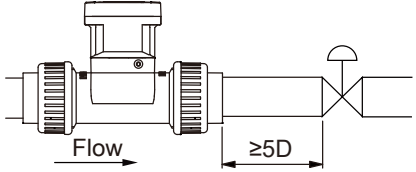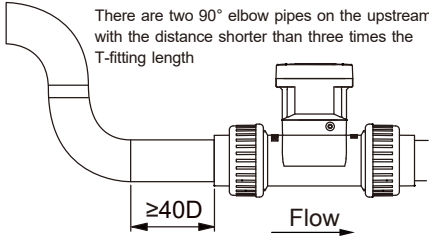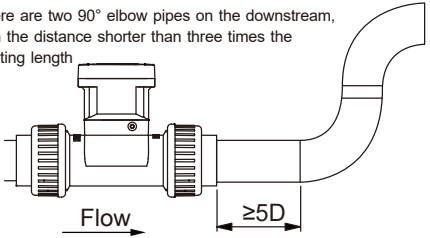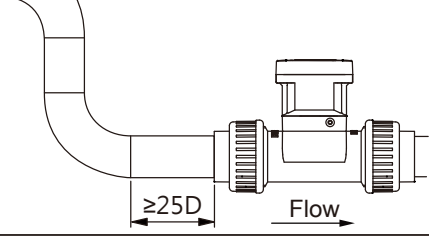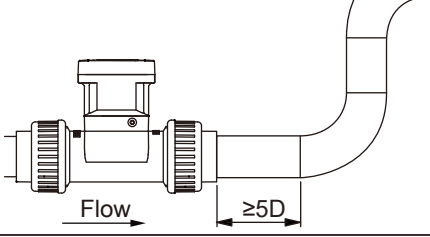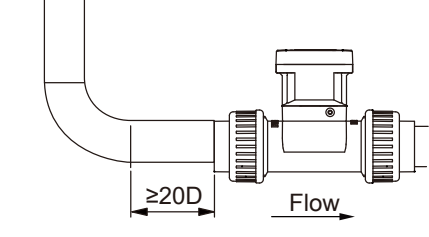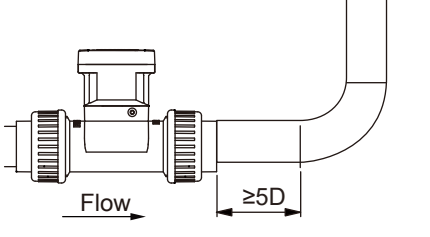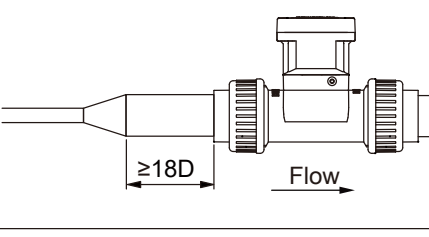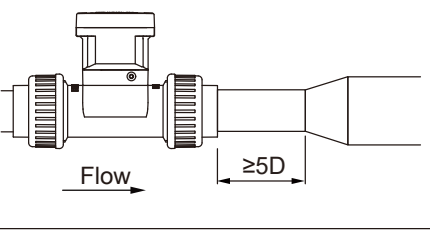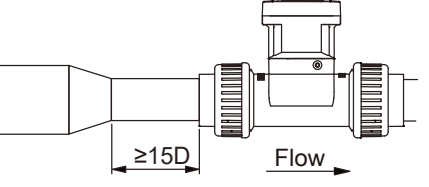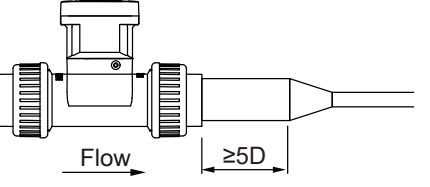Type	Length of Straight Pipe on the Upstream Side	Length of Straight Pipe on the Downstream Side
Regulating valve		
Keep the two elbow pipes close	<p>There are two 90° elbow pipes on the upstream, with the distance shorter than three times the T-fitting length</p> 	<p>There are two 90° elbow pipes on the downstream, with the distance shorter than three times the T-fitting length</p> 
Dual elbow pipes		
Single elbow pipe		
Diverging pipe		
Convergin pipe		

INSTALLATION REQUIREMENTS

1. The flow meter must be in horizontal or vertical pipe.
2. Ensure the flow meter to keep a full pipe.
3. No air bulb or hole should be generated when getting close to the T-fitting area of the flow meter during the measurement. It will affect the accuracy of the flow measurement.

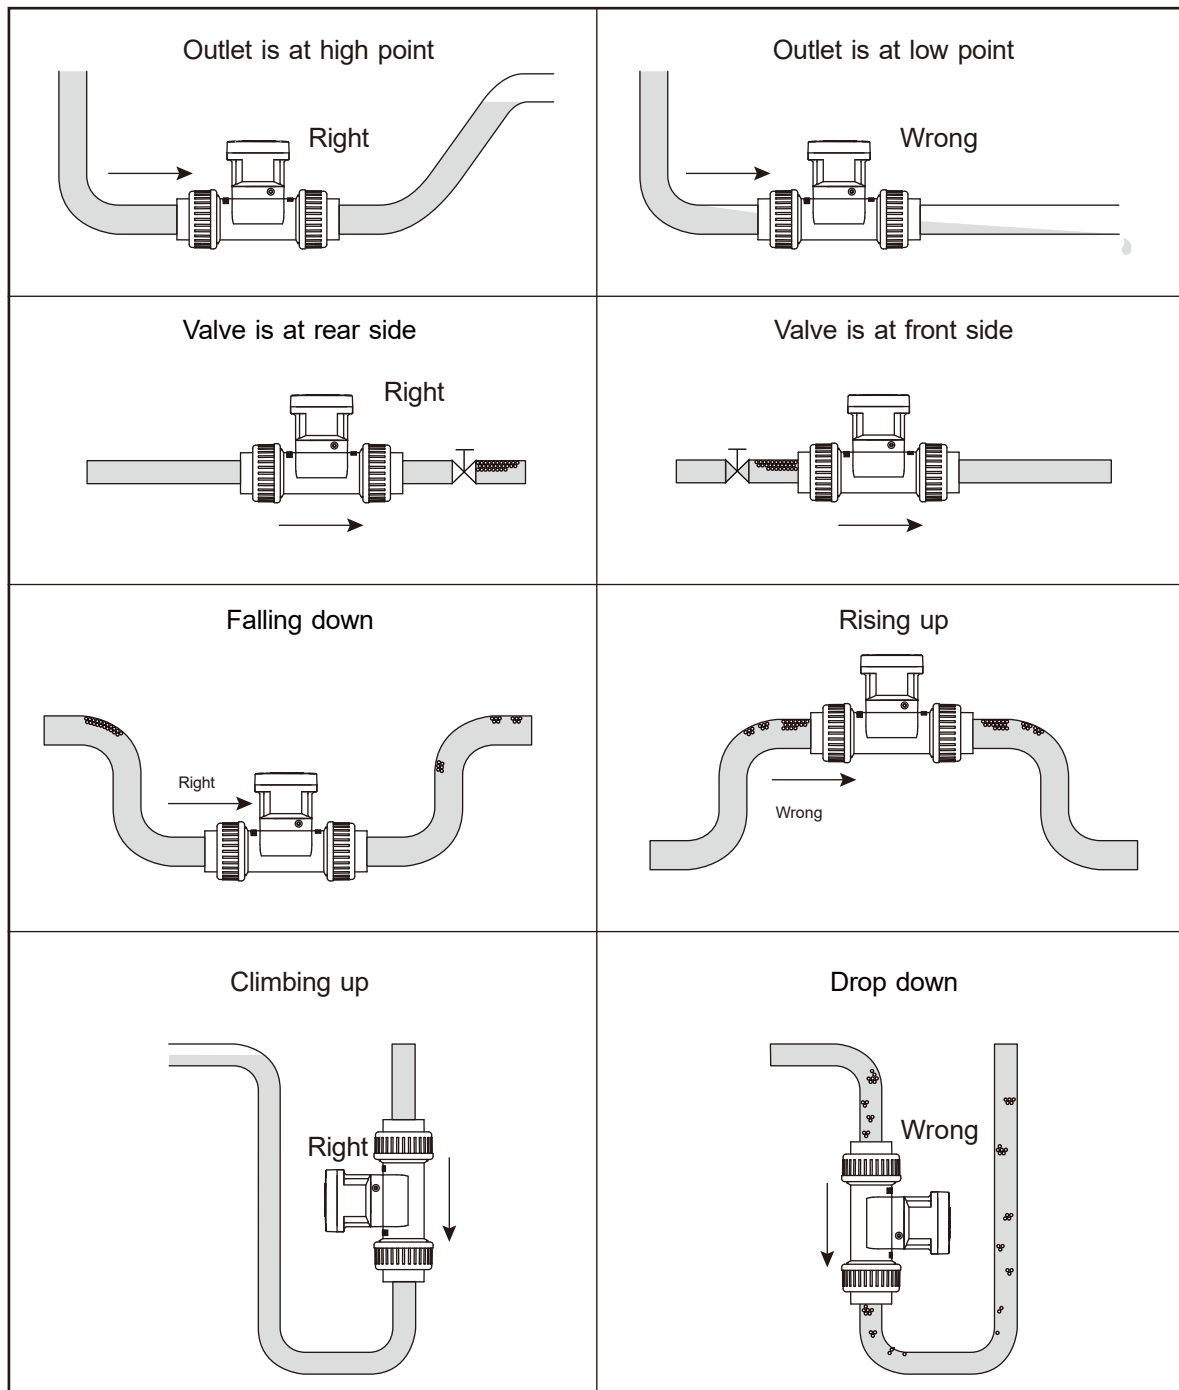

*Note: When installing the flow meter on the horizontal pipe, the sensor blade must face downward. Appropriate material should be selected, and the specifications on pressure and temperature should be followed. Moreover, appropriate pipe diameter should be chosen based on the flow/velocity/diameter.

ORDER INFORMATION

EPR50 0 0 0 - ⁰⁹☐ ¹⁰☐ ¹¹☐ ¹²☐ ¹³☐ ¹⁴☐ ¹⁵☐ ¹⁶☐ ¹⁷☐ ¹⁸☐ ¹⁹☐ ²⁰☐ A ²²☐

⁰⁹ ¹⁰ ¹¹ Pipe diameter

015: DN15(1/2")(Applicable only to PVC fittings)
020: DN20(3/4")
025: DN25(1")
040: DN40(1-1/2")
050: DN50(2")

¹² Display model

A: Without display
B: LCM display

¹³ ¹⁴ Pipe material

MA: SUS 304
MB: SUS 316
MC: SUS 316L
23: PVC

¹⁵ ¹⁶ T-fitting standard

(When the pipe material is SUS, please choose "00")

0: None
AA: JIS
AB: ISO
AC: ASTM
AD: DIN

BA: CNS(Pipe diameter 020, 040 only)



(Only available for PVC)(Pipe material)

¹⁷ ¹⁸ T-fitting standard connection type

(When the pipe material is PVC, please choose "00")

00: None
02: PT female
04: PF female
08: NPT female



(Only available for SUS)(Pipe material)

¹⁹ ²⁰ Blade material

MA: SUS304(100°C)
MB: SUS 316 (100°C)
MC: SUS316L(100°C)

18: PP (60°C)
24: PVDF (100°C)

²² Output

C: 4~20mA,Pulse output*2
D: 0~5V,Pulse output*2
E: RS-485,Pulse output*2


F: 4~20mA,Pulse output*1
G: 0~5V,Pulse output*1

Note: Only C, D and E can be selected when there is a display.
Only F and G can be selected when there is no display.

APPLICATION DEMO



Global Network

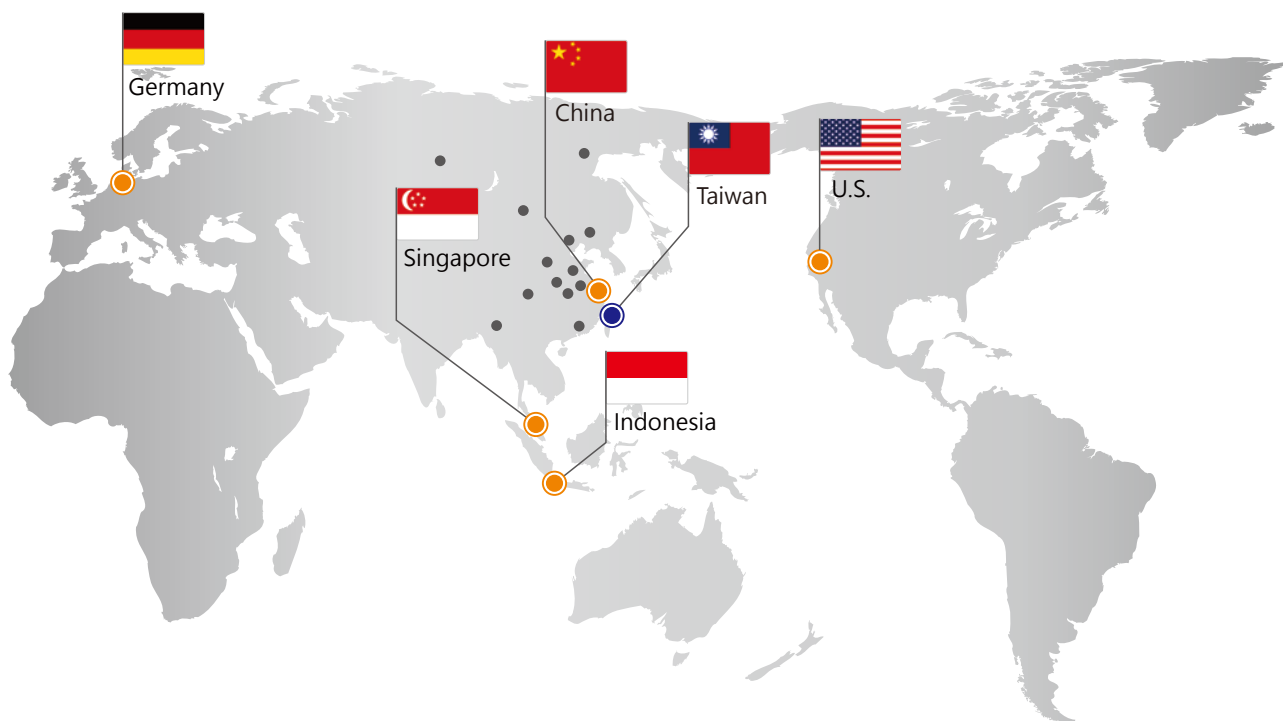

Head Quarter

- Taiwan
FineTek Co., Ltd. - Taipei Head Quarter
No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886-2-2269-6789
FAX: 886-2-2268-6682
EMAIL: info@fine-tek.com

North America

- California, U.S.
Aplus Finetek Sensor Inc. - US Office
355 S. Lemon Ave, Suite D
Walnut, CA 91789
TEL: 1 909 598 2488
FAX: 1 909 598 3188
EMAIL: info@aplusfine.com

Europe

- Germany
FineTek GmbH - Germany Office
Bei den Kämpfen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-12
FAX: +49-(0)4185-8083-80
EMAIL: info@fine-tek.de

Asia

- China
Fine automation Co., Ltd. - Shanghai Factory
No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86-21-6490-7260
EMAIL: info.sh@fine-tek.com

- Singapore
FineTek Pte Ltd. - Singapore Office
37 Kaki Bukit Place, Level 4 Singapore 416215
TEL: 65-6452-6340
EMAIL: info.sg@fine-tek.com

- Indonesia
PT. FineTek Automation Indonesia - Indonesia Office
PERGUDANGAN TUNAS BITUNG
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15,
Bitung Cikupa, Tangerang 15710
TEL: 62 (021)-2958-1688
EMAIL: info.id@fine-tek.com

- Müttec Instruments GmbH - Germany Office
Bei den Kämpfen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-0
FAX: +49-(0)4185-8083-80
EMAIL: muetec@muetec.de



Distributor: