



www.fine-tek.com

Temperature Transmitter





Innovation · Quality · Sharing

SPECIFICATION



TYPE	TR210 Series	TR220 Series
	Non-Isolation	Isolation

Input :
RTD、TC、Rohm



Function summary


Features:

Power supply(Vdc)	12~36 Vdc (Loop Power)	24 VDC $\pm$ 20%
Ambient temp. range($^{\circ}$ C)	-40~85	-40~85
Isolation	N/A	1500 Vdc or peak ac
Channels	1	1
CJC Accuracy($^{\circ}$ C)	$\pm$ 1	$\pm$ 1
Input:		
PT100 Span /min. span($^{\circ}$ C)	-200~850 / 10	-200~850 / 10
PT1000 Span /min. Span($^{\circ}$ C)	-200~850 / 10	-200~850 / 10
Rohm Span /min. Span(Ω)	0~400 or 0~4000 / 10	0~400 or 0~4000 / 10
TC types	B, E, J, K, N, R, S, T	B, E, J, K, N, R, S, T
Output:		
Loop power 2-wire output	4~20mA or 20~4mA	4~20mA or 20~4mA

Technical summary

	Basic Accuracy	Temperature Coefficient
PT100-2Wiers/PT1000-2Wiers	$\pm$ 1 $^{\circ}$ C	$\pm$ 0.005% / $^{\circ}$ C
PT100-3Wiers/PT1000-3Wiers	$\pm$ 0.5 $^{\circ}$ C	$\pm$ 0.005% / $^{\circ}$ C
PT100-4Wiers/PT1000-4Wiers	$\pm$ 0.5 $^{\circ}$ C	$\pm$ 0.005% / $^{\circ}$ C
TC type: E, J, K, N, R, S	$\pm$ 1.5 $^{\circ}$ C	$\pm$ 0.01% / $^{\circ}$ C
TC type: B	$\pm$ 2 $^{\circ}$ C	$\pm$ 0.04% / $^{\circ}$ C
TC type: T	$\pm$ 1 $^{\circ}$ C	$\pm$ 0.01% / $^{\circ}$ C
Rohm	$\pm$ 0.1 Ω	$\pm$ 0.005% / $^{\circ}$ C

Dimensions

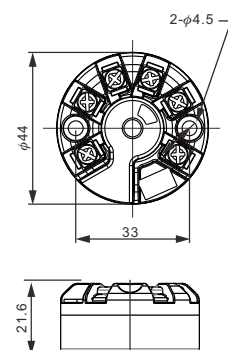

(Unit: mm)




TYPE

TR160 Series

Economical type

Input : RTD, TC,
Rohm, mV,
Linear Current,
Linear Voltage



Function summary

Features:

Power supply(Vdc)	18~36V
Ambient temp. range(°C)	-40~85
Isolation	None
Channels	1
CJC accuracy(°C)	$\leq \pm 1$
Input:	
PT100 Span /min. span(°C)	-200~850 / 10
Rohm Span /min. Span(Ω)	0~400 / 5
TC types	B, E, J, K, N, R, S, T
Linear Current, signal range	0~20mA, 4~20mA
Linear Voltage, signal range	0~0.5V, 0~1V, 0~5V, 0~10V, 0~20V


Output:

Loop Power 2-wire output	4~20mA/20~4mA
--------------------------	---------------

Technical summary

	Basic Accuracy	Temperature Coefficient
PT100	$\leq \pm 0.5^{\circ}\text{C}$	$\leq \pm 0.005^{\circ}\text{C}$
Rohm	$\leq \pm 0.4\Omega$	$\leq \pm 0.005^{\circ}\text{C}$
TC type: E, J, K, N, T	$\leq \pm 4^{\circ}\text{C}$	$\leq \pm 0.04^{\circ}\text{C}$
TC type: B	$\leq \pm 3^{\circ}\text{C}$	$\leq \pm 0.01^{\circ}\text{C}$
TC type: R, S	$\leq \pm 3^{\circ}\text{C}$	$\leq \pm 0.04^{\circ}\text{C}$
TC type: T	$\leq \pm 2^{\circ}\text{C}$	$\leq \pm 0.01^{\circ}\text{C}$
Voltage	$\leq \pm 0.1\text{mV}$	$\leq \pm 0.005^{\circ}\text{C}$

Dimensions

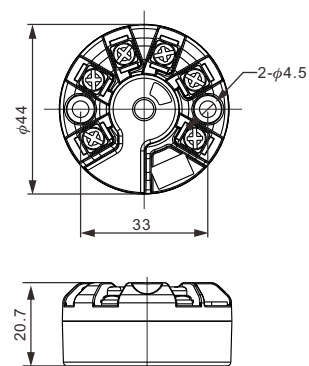

(Unit: mm)



TYPE	TR130/131 Series	TR140/141 Series	Dimensions
	DIN Rail Non-Isolation	DIN Rail Isolation	TR130/131/140/141 Series
Input : RTD 、 TC 、 Rohm 、 mV 、 Linear Current 、 Linear Voltage	1 Channel 	1 Channel 	 (Unit: mm)
	2 Channel 	2 Channel 	
Function sSummary:			
Features:			
Power supply(Vdc)	18~32V(Loop-Powered)	18~32V(Loop-Powered)	
Ambient temp. range(°C)	-20~60	-20~60	
Isolation	None	1500 Vdc or peak ac	
Channels	1 or 2	1 or 2	
CJC Accuracy(°C)	≤ ± 1(Internal)	≤ ± 1(Internal)	
Input:			
PT100 Span /min. span(°C)	-200~850 / 10	-200~850 / 10	
Rohm Span /min. Span(Ω)	0~400 / 5	0~400 / 5	
TC types	B, E, J, K, N, R, S, T	B, E, J, K, N, R, S, T	
Linear Current, signal range	0~20mA, 4~20mA	0~20mA, 4~20mA	
Linear Voltage, signal range	0~0.5V, 0~1V, 0~5V, 0~10V, 0~20V	0~0.5V, 0~1V, 0~5V, 0~10V, 0~20V	
Output:			
2-wire output	4~20mA	4~20mA	
Technical summary:			
	Basic Accuracy	Temperature Coefficient	
PT100	≤ ± 0.5°C	≤ ± 0.005% / °C	
Rohm	≤ ± 0.04Ω	≤ ± 0.005% / °C	
TC type: E, J, K, N, T	≤ ± 2°C	≤ ± 0.01% / °C	
TC type: B	≤ ± 5.5°C	≤ ± 0.04% / °C	
TC type: R, S	≤ ± 3°C	≤ ± 0.04% / °C	
Voltage	≤ ± 0.01mV	≤ ± 0.005% / °C	

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
TR210	TRX30100-A
TR220	TRX30100-B
TR160	TRX20100-A
TR130	TRX10000-A
TR131	TRX10200-A
TR140	TRX10000-B
TR141	TRX10200-B

ORDER INFORMATION

TRX 3 0 1 0 0 - 09 10 11 12 13 14 15

09 Isolation type

A: None Isolation
B: Isolation

10 Input type

C: T/C
D: RTD
T: RTD & T/C

11 12 Input range

C	00: ALL
	10: K Type -200°C~1370°C
	11: K Type -90°C~320°C
	20: J Type -210°C~1200°C
	21: J Type -90°C~320°C
	30: T Type -200°C~400°C
	40: E Type -200°C~1000°C
	50: R Type -50°C~1760°C
	60: S Type -50°C~1760°C
	70: B Type -250°C~1820°C
	80: N Type -200°C~1300°C

D	A0: RTD PT100 2/4 Wire
	A1: RTD PT100 3 Wire
	B0: RTD PT1000 2/4 Wire
	B1: RTD PT1000 3Wire
T	01: All Type & PT100 2/4 Wire
	02: All Type & PT1000 2/4 Wire
	03: All Type & PT100 3 Wire
	04: All Type & PT1000 3 Wire

13 14 Along output

04: 4~20mA
05: 20~4mA

15 Display unit

A: °C
B: °F



TRX ④ ⑤ ⑥ 0 0 - ⑨ ⑩ ⑪ ⑫ ⑬

④ **Version**

- 1: First
- 2: Second

⑤ ⑥ **Appearance type**

- 00: Din rail type(1 CH)
- 01: Circle type
- 02: Din rail type(2 CH)

⑨ **Isolation type**

- A: None Isolation
- B: Isolation

⑩ ⑪ **Input range**

- | | | |
|------------|--------------------------|--------------------------|
| V1: 0~0.5V | T1: ALL | T6: R Type -50°C~1760°C |
| V2: 0~1V | T2: K Type -200°C~1370°C | T7: S Type -50°C~1760°C |
| V3: 0~5V | TK: K Type -90°C~320°C | T8: B Type -250°C~1820°C |
| V4: 0~10V | T3: J Type -210°C~1200°C | T9: N Type -200°C~1300°C |
| V5: 0~20V | TJ: J Type -90°C~320°C | TA: PT 100 -200°C~850°C |
| I1: 4~20mA | T4: T Type -200°C~400°C | R1: 0~400 Ω |
| I2: 0~20mA | T5: E Type -200°C~1000°C | |


⑫ **Along output**

- 1: 4~20mA
- 2: 20~4mA

⑬ **Display unit**

- A: °C
- B: °F

Global Network

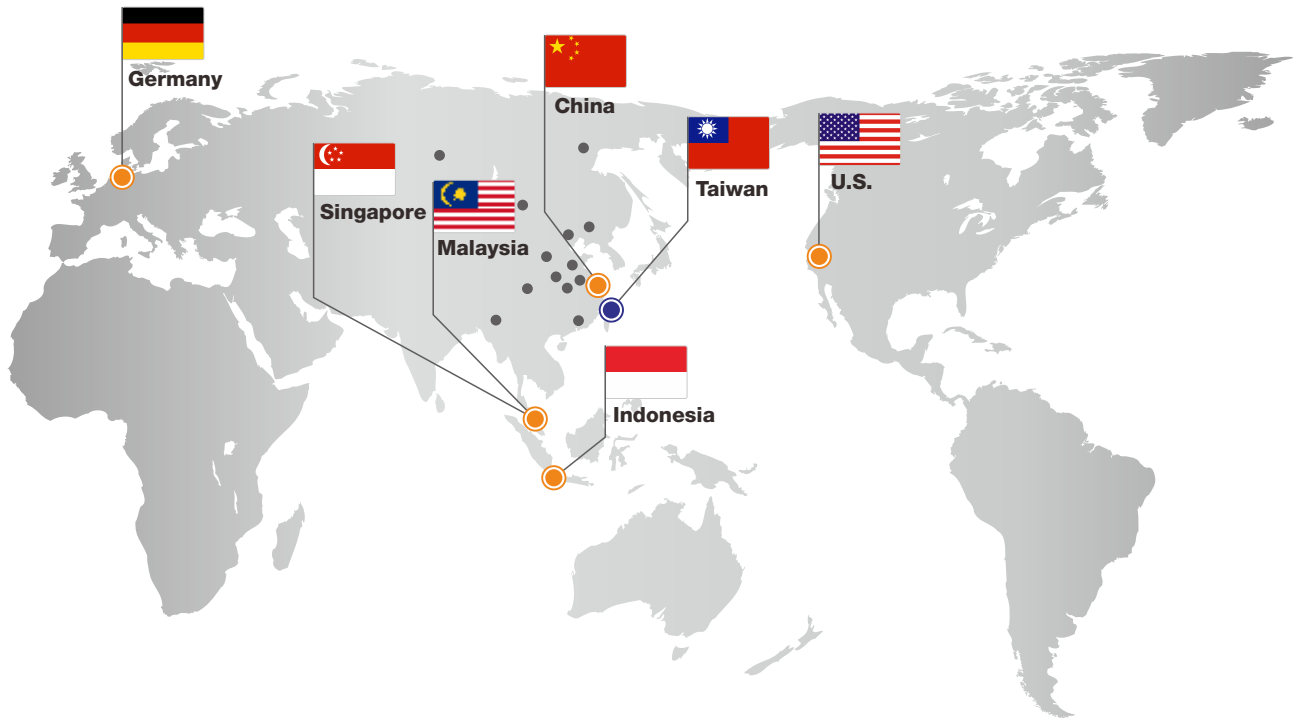

■ Head Quarte

● Taiwan

FineTek Co., Ltd. - Taipei Head Quarter 
No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886-2-2269-6789
FAX: 886-2-2268-6682
EMAIL: info@fine-tek.com

■ North America

● California, U.S.

Aplus Finetek Sensor Inc. - US Office
355 S. Lemon Ave, Suite D, Walnut,
CA 91789
TEL: 1 909 598 2488
FAX: 1 909 598 3188
EMAIL: info@aplusfine.com

■ Europe

● Germany

FineTek GmbH - Germany Office
Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-12
FAX: +49-(0)4185-8083-80
EMAIL: info@fine-tek.de

■ Asia

● China

Fine automation Co., Ltd. - Shanghai Factory 
No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86-21-6490-7260
EMAIL: info.sh@fine-tek.com

● Singapore

FineTek Pte Ltd. - Singapore Office
37 Kaki Bukit Place, Level 4 Singapore 416215
TEL: 65-6452-6340
EMAIL: info.sg@fine-tek.com

● Indonesia

PT. FineTek Automation Indonesia - Indonesia Office 
Tunas Bitung Industrial Park Blok C3 No.12 dan No.15
Jalan Raya Serang Km.13.8 Kabupaten Tangerang 15710 Banten
TEL: 62 (021)-2958-1688
EMAIL: info.id@fine-tek.com

● Malaysia

FineTek Co., Ltd. - Malaysia Office
8-05, Plaza Azalea, Persiaran Bandaraya,
Seksyen 14, 40000 Shah Alam, Selangor, Malaysia
TEL: 603-5524-7168
EMAIL: info.my@fine-tek.com

● Müttec Instruments GmbH - Germany Office

Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-0
FAX: +49-(0)4185-8083-80
EMAIL: muetec@muetec.de



Distributor: