



Tuning Fork Level Switch



PRODUCT INTRODUCTION

WORKING PRINCIPLE

The SC series is a vibrating tuning fork point level sensor that utilizes piezoelectric crystal and solidstate electronics technology to produce vibration in the tuning fork element at a specific frequency and receive electronic feedback. When the probe element is in contact with the target material, the vibration is dampened, the electronic feedback changes, and presence of the material is thereby sensed by the electronics which changes the state of the sensor output to indicate material presence. When the probe element is again free of the target material, the vibration again is produced and the output state reverts to indicate material absence.

FEATURE

- SPDT Relay output, SSR MOSFET output.
- Wide voltage supply range 20~250 VAC/VDC ,50/60Hz
- No frequent calibration required, easy-to-use, sturdy and durable design. High/low failure safe mode, safe and reliable.
- Sensitivity adjustment is available for different densities of media. Fine powder can be detected.
- Suitable for liquid, powder, and solid application.
- Dual insulation can reduce damage on the PCB board caused by great changes in temperature and humidity, as well as condensation effects (SC3□ series).
- It can be tested by pressing the test button after installation (SC3□ series).
- Output switch delay function (SC3□ series).
- Self-diagnosis mechanism can detect the abnormality such as the abrasion of the tuning fork or the material viscosity (SC3□ series).
- The compact built-in wiring box can save the installation space (SC3□ series).
- The wiring box can rotate 270 degrees, facilitating adjustment of the inlet direction (SC3□ series).
- The minimum measurable specific gravity can reach 0.01 g/cm³ (SC35 series).
- Ultra protection mechanism can set the secondary output contact point as alarm output (SC35 series).
- Support the function of detecting underwater sediments (SC35 series).
- All-in-one design, 3/4" (SC38), 1" thread is suitable for the installation of a small tube.
- Adjustment setting for different densities of media P>0.5 g/cm³ or p.0.7 g/cm³ (SC38).
- Switch delay setting function (SC3□ series).
- Alarm indicators based on failure status or output status selected according to the customer's habits (SC3□ series).
- Automatic calibration of the operation points for different densities of media as required by the customer (SC38).

APPLICABLE MATERIALS

The tuning fork level switch can be widely applied to detect the min. and max. level in tanks, silos and hoppers filled with materials of different densities and state. The following is a list of applications.

POWDER

- | | |
|------------------------|------------------------|
| 1. Powdered milk | 15. Pellets |
| 2. Frozen potato chips | 16. Peanuts |
| 3. Beans | 17. Tobacco |
| 4. Sugar | 18. Wood shavings |
| 5. Sweets | 19. Chalk |
| 6. Coffee beans | 20. Stearin chips |
| 7. Coffee powder | 21. Powdered cellulose |
| 8. Frozen dry coffee | 22. Glass fine power |
| 9. Tea | 23. Granular plastics |
| 10. Salt | 24. Gravel |
| 11. Flour | 25. Powdered clay |
| 12. Foundry sand | 26. Polystyrene powder |
| 13. Spices | 27. Styrofoam |
| 14. Animal food | 28. Soda |

LIQUID

1. Water & Solutions
2. General Purpose Solvent
3. Soy sauce
4. Heavy oil
5. Petroleum
6. Oil
7. Ink
8. Cream
9. Drink & Beverage
10. Corrosive liquid







APPLICATION SCOPE

It is applicable to the max. and min. level detection of the tanks or tubes filled with various solid/liquid media. The product has a variety of applications, such as in the chemical fiber industry, rubber industry, tire industry, cement industry, steel industry, food industry, pharmaceutical industry, and animal feed factories in terms of the level detection for the bins of the raw material/process/finished products




APPLICATION EXAMPLE

Application situation	SC24	SC28	SC14X	SC17X	SC35X	SC38X
Liquid	★	★	★	★		★
Powder	★		★	★	★	
Solid					★	
Corrosive media			Optional			
Explosion proof				★	★	★
Tri-Clamp connection	Optional	Optional	Optional			Optional
Operation temp. 100°C	★	★				
Operation temp. 130°C			★	★		
Operation temp. 150°C					★	★
Operation temp. 280°C					★	
Max. pressure<25bar					★	
Max. pressure<40bar	★	★	★	★		★

PRODUCT DIMENSIONS

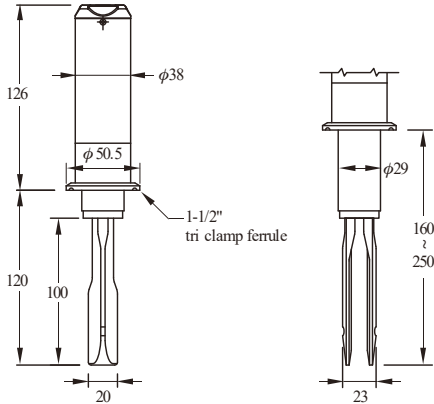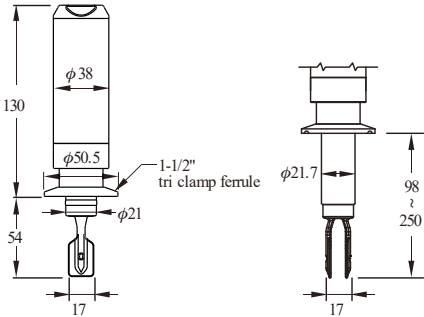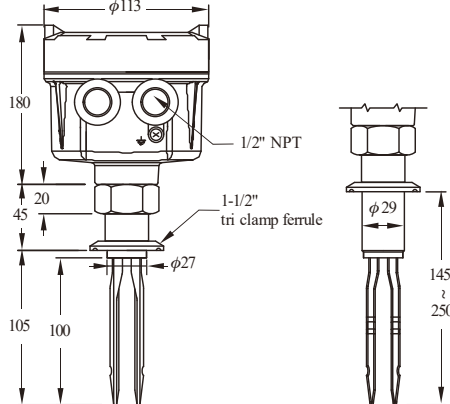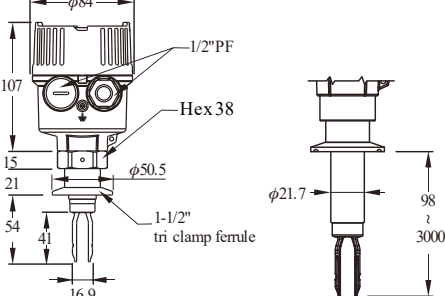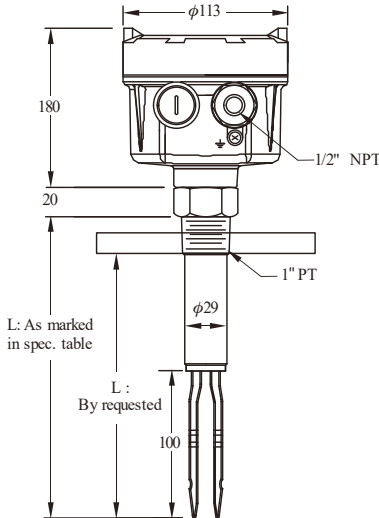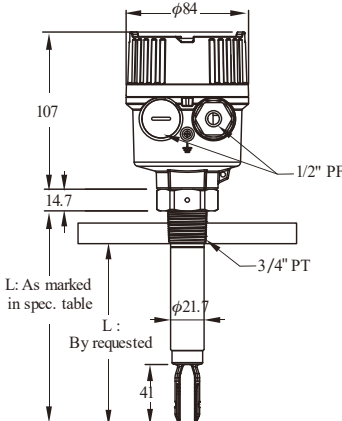SC24 Series tri clamp ferrule connection	SC28 Series tri clamp ferrule connection
 Standard type Extended type	 Standard type Ultra Extension type
SC14 Series tri clamp ferrule connection	SC38 Series tri clamp ferrule connection
 Standard type Extended type	 Standard type Ultra Extension type
SC14 Series flange connection	SC38 Series flange connection
 L: As marked in spec. table L: By requested	 L: As marked in spec. table L: By requested

SC14 STANDARD TYPE

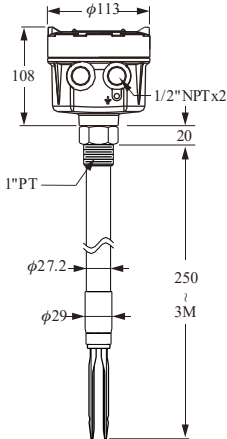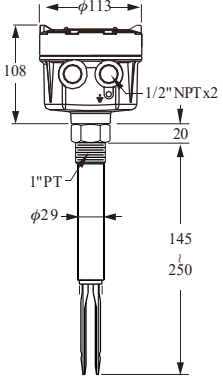Dimensions (Unit:mm)			
Model No.	SC1400 Standard Type	SC1410 Tuning Fork Ultra Extension Type	SC1420 Tuning Fork Extension Type
Level sensor housing	Aluminum / IP65		
Probe material	SUS 304 / 316 / 316L		
Mounting	1"PT		
Conduit	1/2"NPTx2		
Max. vertical load on rod.	177in.Lbs(20Nm)		
Process pressure.	-1~600PSI (40bar)		
Power supply	20~250VAC / VDC,50 / 60Hz		
Power consumption	10VA		
Ambient temp.	-40°C~60°C		
Process temp.	-40°C~130°C		
Signal output	Relay, SPDT, 5A/250 VAC, 1 set or 2 set SSR(MOSFET) 400mA/60 VAC / VDC, 1 set or 2 set		
Min. material density sensed	Solid:≥0.07g/cm ³ , Liquid: ≥0.7g/cm ³		
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset		
Vibrating frequency.	350~370Hz		
Selectable Fail-safe	Hi. / Lo.		
Selectable sensitivity	Hi. / Lo.		

SC17 EX-PROOF TYPE





Dimensions (Unit:mm)		
Model No.	SC1740 Standard Type	SC1741 Tuning Fork Ultra Extension Type
Level sensor housing	Aluminum / IP65	
Probe material	SUS 304 / 316 / 316L	
Mounting	1"PT	1"PT
Conduit	1/2"NPT × 2	
Max. vertical load on rod.	177in.Lbs(20Nm)	
Process pressure.	-1~600PSI (40bar)	
Power supply	20~250, 50/60Hz VAC/VDC	
Power consumption	10VA	
Ambient temp.	-20°C~70°C	
Process temp.	-40°C~125°C	
Signal output	Relay, SPDT, 3A / 250VAC SSR(MOSFET) 400mA/60 VAC / VDC	
Min. material density sensed	Solid: ≥0.07g/cm³, Liquid: ≥0.7g/cm³, viscosity : 1~10000 cSt	
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset	
Vibrating frequency.	350~370Hz	
Selectable Fail-safe	Hi. / Lo.	
Selectable sensitivity	Hi. / Lo.	

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE

DESCRIPTION OF FEATURES


FORK TRIGGER POINT

SC14/SC17 fork trigger point is shown as below figure.
The testing medium is water(S.G.=1 g/cm³).
and its trigger point is about 23mm from the fork tip.
If testing medium with S.G (specific gravity) lower than 1g/cm³ (water), the trigger point would increase.
Similarly, the trigger point will downward while the S.G is large than water.

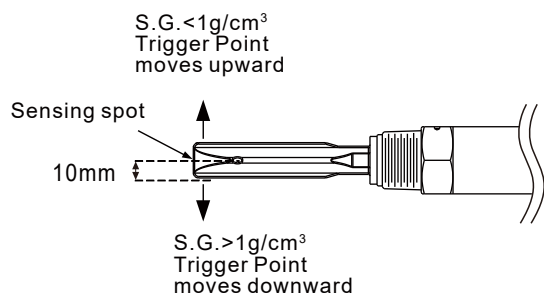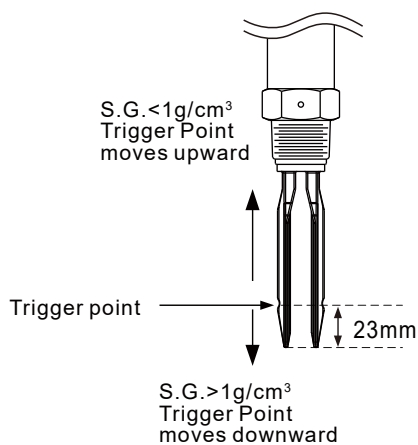

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE WIRING INSTRUCTIONS

SC14XX, SC174X




Relay output type(SPDT)




RT2 RT1 NC COM NO N- L+ $\perp$


SSR(MOSFET) output type



RT2 RT1 COM NO N- L+ $\perp$




Relay output type (DPDT)



RT2 RT1 COM2 NO2 COM1 NO1 N- L+ $\perp$

SSR(MOSFET) output type



RT2 RT1 COM2 NO2 COM1 NO1 N- L+ $\perp$

FUNCTIONAL DESCRIPTION

Description of terminal functions

- L+, N-: Power Supply
- NC, COM, NO: Relay Output
- RT1, RT2: Remote-Test
- $\perp$: Ground Connection
- COM1, NO1 : SS R(MOSFET) Output
- COM2, NO2 : The second set of SSR (MOSFET) output (Optional)

DESCRIPTION OF PANEL FUNCTIONS

- PWR: Power Supply (Green Light)
- SIGNAL: Output Indication (Red Light)
- FSH: Power On. The signal lamp is on and the relay is conductive. While the tuning fork switch senses the material, the signal lamp is off and relay is not conductive.
- FSL: Power On. The signal lamp is off and the relay is not conductive. While the tuning fork switch senses the material, the signal lamp is on and relay is conductive.
- SENSITIVITY L: Low Sensitivity
- SENSITIVITY H: High Sensitivity

FAIL-SAFE HIGH / LOW PROTECTION

FSH (Fail-Safe High) Protection:

Switch to FSH mode.

Normal Status: The signal lamp is on. It indicates that the tuning fork switch does not sense the material and the relay is conductive.

Failure: When the power shuts down, the signal lamp is off. It indicates that the tuning fork switch is voided and the relay is not conductive.

FSL (Fail-Safe Low) Protection:

Switch to FSL mode.

Normal Status: The signal lamp is on.

The tuning fork switch senses the material and the relay is conductive.

Failure: When the power shuts down, the signal lamp is off. The tuning fork switch is voided and the relay is not conductive.

SENSITIVITY ADJUSTMENT

The SENSITIVITY is located on the right side of the panel. Minor adjustment can be made by rotating the sensitivity up to 22 turns using a small screw driver. Rotating clockwise will increase sensitivity; rotating counter-clockwise will decrease sensitivity.

The sensitivity is originally set at max. value. The switching point is at 15mm from the tip of the tuning fork. The switching point position will be changed by the sensitivity value. If the sensitivity adjusts to lower value, the switching point position is moving backward; if the sensitivity adjusts to high value, the switching point position is moving forward. User may change the switching point position by adjusting the sensitivity. The changing range of switching point is about 60mm. For example, if the switching point needs to be moved backward by 30mm, the user needs to adjust SENSITIVITY counter-clockwise by 10 turns. In general cases, there is no need for sensitivity adjustment.

	FSL		FSH	
Level				
Contact form	NO COM NC	NO COM NC	NO COM NC	NO COM NC
Indication	○	●	●	○
Status	Fail	Normal	Normal	Fail

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC1400	SCX10000-AAB
SC1410	SCX10000-CAB
SC1420	SCX10000-BAB
SC1740	SCX1001C-AAB
SC1741	SCX1001C-CAB

ACCESSORIES


Cable Conduit - Ex d IIC

Material: Washer - NBR


Body— Copper alloy(3/4"NPT)

Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)

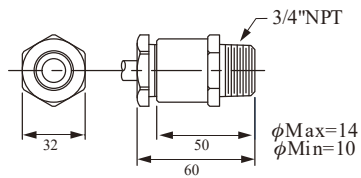

HP415-A23000MG01(29-1108)

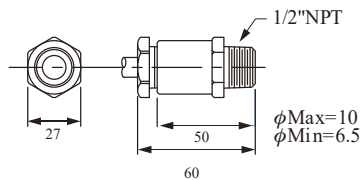

SC14 STANDARD TYPE / SC17 EX-PROOF TYPE
ORDER INFORMATION

0506070809

121314151617181920212223242526

SCX1-AB

1920

Probe material

MA: SUS304
MB: SUS316
MC: SUS316L

2122

Coating material

00: None
14: PFA
34: ECTFE

23242526

Probe length

Code	Probe length
0130~3000	130~3000mm
0105~0250	105~250mm

※Coating length max. 400mm

10

SC24 LITE-TYPE

Dimensions (Unit:mm)			
Model no.	SC24□□□ DIN Connector	SC24□□□ M12 Connector	SC24□□□ Cable Connector
Supply voltage & output	SC240□□: 20~250 VAC/VDC 2 Wire Contactless electronic switch. SC24P□□: 12~55 VDC 3 Wire PNP output. SC24N□□: 12~55 VDC 3 Wire NPN output. SC24K: (SIO mode)12~55 VDC 3wire PNP output; (IO-Link mode)18~30 VDC 3wire PNP output.*1		
Fork length	100mm		
Ambient temp.	-40~85°C		
Ambient humidity	80% RH non-condensed		
Process temp.	SC24□□□T: -40~+150°C SC24□□□: -40~+100°C		
Process pressure	Maximum 40 bar		
Min. material density sensed	Solid:density: $\geq 0.07\text{g/cm}^3$ Liquid:density: $\geq 0.7\text{g/cm}^3$ Viscosity:1~10000 cSt		
Magnetic testing	Output function test performed by putting magnets near the indicated spot		
Vibrating frequency	350~370Hz		
Status indication	Green light:indicate power supply Red light:indicate operating mode		
Housing material	SUS304		
Probe material	SUS304, SUS316, SUS316L		
IP protection	IP65	IP67	IP67
Mounting	1" more		
Conduit	Valve plug DIN 43650	M12 Connector(180° / 90°)	Cable connector

Note 1: IO-Link only has M12 connector ,present as PNP output.

SC24 LITE-TYPE DESCRIPTION OF FEATURES


FORK TRIGGER POINT

SC24 fork trigger point is shown as below figure.

The testing medium is water($S.G.=1\text{ g/cm}^3$) and its trigger point is about 23mm from the fork tip.


If testing medium with S.G (specific gravity) lower than 1g/cm^3 (water), the trigger point would increase.

Similarly, the trigger point will downward while the S.G is large than water.

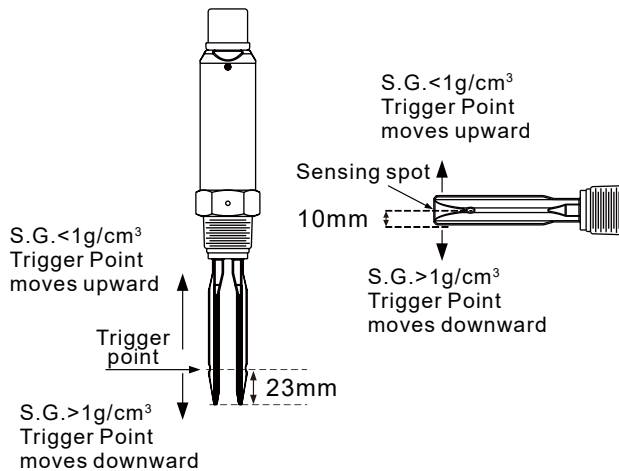

MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.

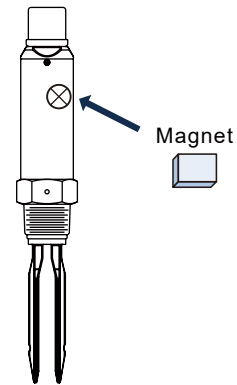

SC24 LITE-TYPE DESCRIPTION OF FEATURES

OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED					

It represents Blinking

OUTPUT STATUS FOR PNP / NPN TRANSISTOR

DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking

SC24 LITE-TYPE WIRING INSTRUCTIONS

SC240X(TWO WIRES) WIRING


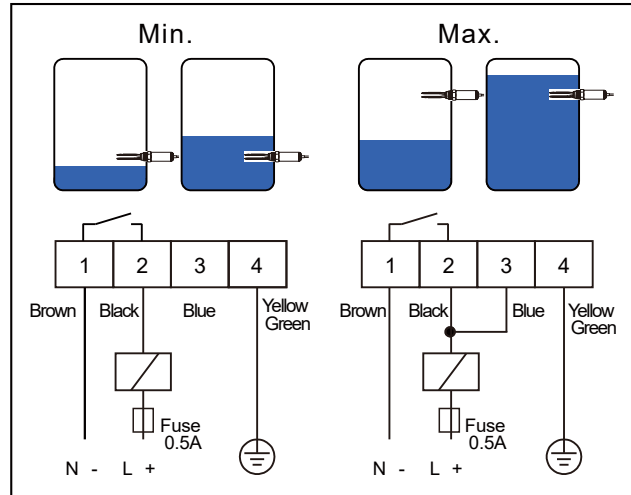


Figure 1 Two Wires Wiring

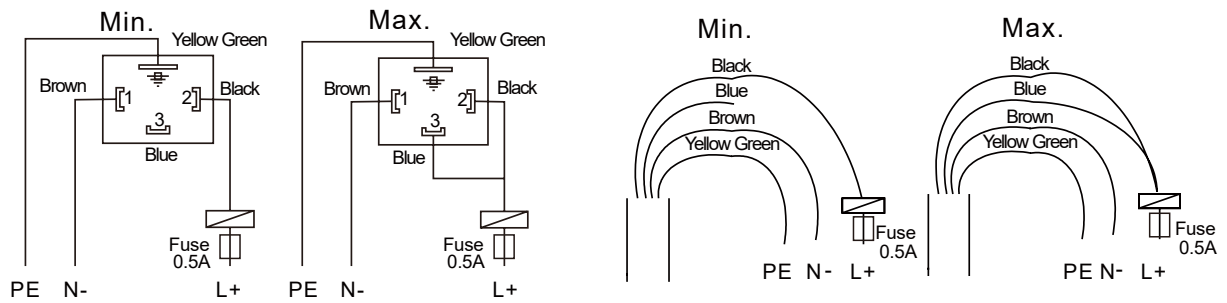

DIN Wiring Diagram

M12x4Pin Cable Wiring Diagram

WIRING

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay.
Pin 4 (Yellow Green) connects to tank ground.

■ High (Max.) mode:

Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay .
Pin 4 White (Yellow Green) connects to tank ground.

SC24 LITE-TYPE WIRING INSTRUCTIONS

SC24P/N(THREE WIRES) WIRING

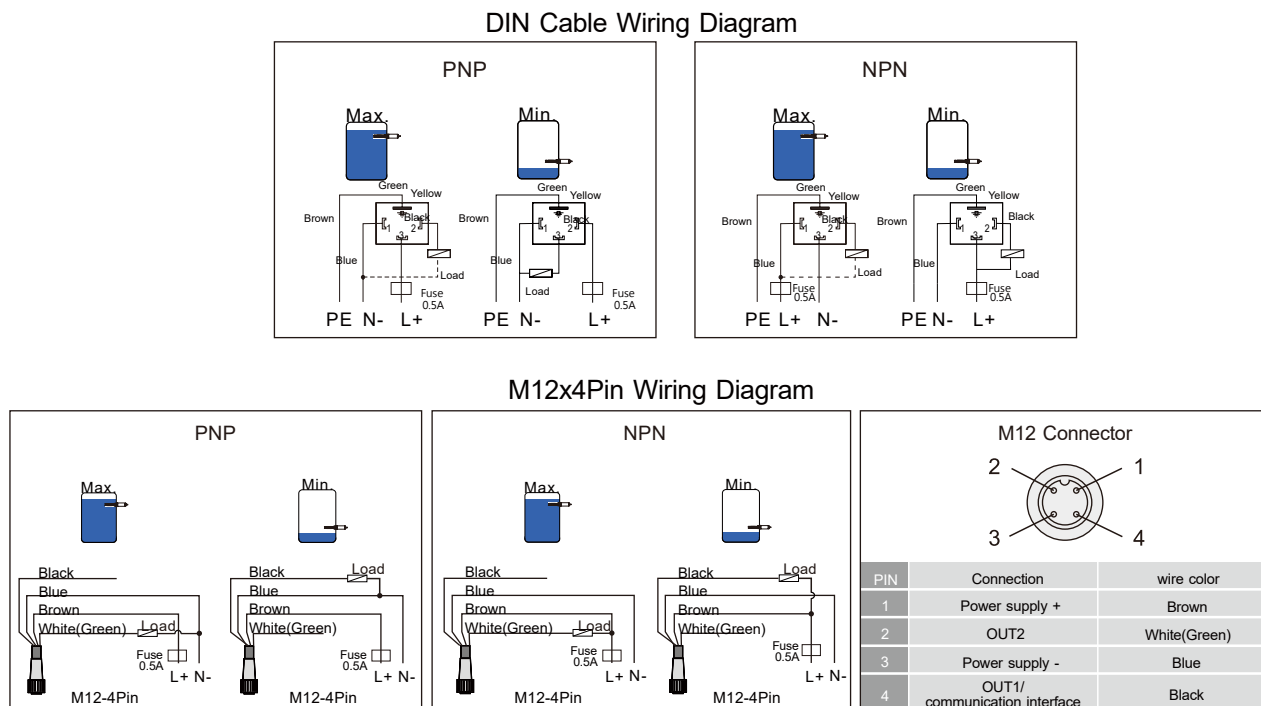


Figure 2 PNP / NPN Output Wiring Diagram

WIRING

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

►DIN & Cable Wiring

PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact to tank ground.

►M12 x 4Pin Wiring:

PNP Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

SC24 LITE-TYPE
MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC2400	SCX2□□00-□BA
SC240□□T	SCX20200-□BA
SC24P□	SCX2□□00-□BP
SC24N□	SCX2□□00-□BN

SC35 TUNING FORK LEVEL SWITCH



NEPSI Ex ta IIIC T95°C ...T136°C Da
Ex tb IIIC T80°C ...T290°C Db
IECEx Ex ta IIIC T95°C / T130°C / T136°C Da
Ex tb IIIC T80°C / T95°C / T130°C / T160°C / T240°C / T290°C Db

Dimensions (Unit:mm)			
Model No.	SC350 Standard Type	SC351 Extension Type	SC352 Cable Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67		
Probe material	SUS 304 / 316 / 316L		
Power supply	19 ~253 VDC / VAC, 50/60 Hz ; NPN / PNP(10~55VDC)		
Probe construction	Max. 1.5 W		
Voltage endurance capability	3.7 kV		
Overvoltage protection	overvoltage category II		
Ambient temp.	-40~85 °C		-40~75 °C
Process temp.	-40~150 °C	-40~150 °C	-40~80 °C
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$		
Measuring frequency	140 Hz $\pm$ 5 Hz		
Material dimension	Max.10 mm		
Conduit	1/2" PF / 1/2" NPT(Ex-proof type only supports 1/2" NPT)		
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$		
Process pressure	Max.25 bar		Max. 2 bar
Output signal	2 sets of SPDT relay output / 2 sets of transistor output / 3 wires NPN/PNP transistor output		
Contact capacity	Relay: 6A / 250VAC · 6A / 28VDC ; Transistor: 400mA · 60VAC / VDC NPN / PNP / Transistor: 350mA · 55VDC		

SC24 LITE-TYPE ORDER INFORMATION

SCX2
 05
06
00
00
 -
 09
10
11
12
13
14
15
16
17
18
19
20
21
22
23
24

05 06 Model

00: Standard 02: Hi-temperature

09 Construction

A: Standard B: Extension type

10 Fork length

B: 100mm

11 Power supply

A: 20~250 VAC/VDC, 50/60Hz; 2 wire Contactless electronic switch
 P: 12~55 VDC ; 3 Wire PNP output.
 N: 12~55 VDC ; 3 Wire NPN output.
 K: IO-Link ; 3 wire PNP output.

Connection

12 13

Flange
 AK: JIS-FF
 AN: ANSI-RF
 AS: DIN-FF
 AI: 3A

Thread
 AA: JIS
 AC: ANSI

14 15

A8: 1"
 A9: 1-1/4"
 B1: 1-1/2"
 B2: 2"
 B4: 2-1/2"
 B5: 3"
 B7: 4"
 D8: DN25
 E1: DN40

16 17

01: PT male
 03: PF male
 07: NPT male
 40: 5 kg/cm²
 42: 10 kg/cm
 48: 150 Lbs
 49: 300 Lbs
 57: PN10
 58: PN16

18 19 Probe material

MA: SUS304
 MB: SUS316
 MC: SUS316L

20 Connection

A: M12x1(180°) C: Cable
 B: M12x1(90°) D: DIN 43650

※M12x1 with Cable, standard cable length 2M, PVC 24AWG
 ※Only option A,B can be selected for IO-Link version.

21 22 23 24 Probe length

Code	Probe length
0130~0250	130~250mm


SC35 TUNING FORK LEVEL SWITCH

NEPSI Ex ta IIIC T95°C ...T136°C Da
Ex tb IIIC T80°C ...T290°C Db
IECEx Ex ta IIIC T95°C / T130°C / T136°C Da
Ex tb IIIC T80°C / T95°C / T130°C / T160°C / T240°C / T290°C Db

Dimensions (Unit:mm)		
Model No.	SC350 High-temp. Type	SC351 High-temp. Extension Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67	
Probe material	SUS 304 / 316 / 316L	
Power supply	19 ~253 VDC / VAC, 50/60 Hz	
Probe construction	Max. 1.5 W	
Voltage endurance capability	3.7 kV	
Overvoltage protection	overvoltage category II	
Ambient temp.	-40~85 °C	
Process temp.	-40~280 °C	
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$	
Measuring frequency	140 Hz $\pm$ 5 Hz	
Material dimension	Max.10 mm	
Conduit	1/2" PF / 1/2" NPT(Ex-proof type only supports 1/2" NPT)	
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$	
Process pressure	Max. 25 bar	
Output signal	2 sets of SPDT relay output / 2 sets of transistor output	
Contact capacity	Relay: 6A / 250VAC · 6A / 28VDC Transistor: 400mA · 60VAC / VDC	

SC35 TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES

PANEL INTRODUCTION

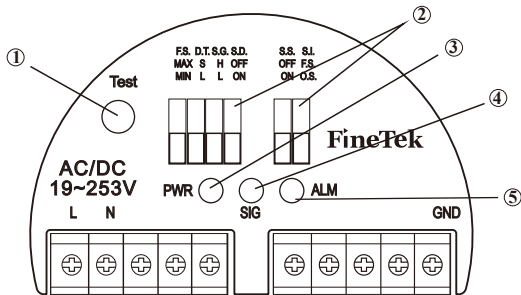


- ①: Test button
- ②: Function adjustment button
- ③: Power indicator
- ④: Status indicator
- ⑤: Alarm indicator



Abbreviation	Function	Option description	Remarks
Test	Test button	Reverse output signal	Reverse output signal can be used to provide a method for testing control equipment which is connected to sensor output
F.S.	Fail-Safe	MAX: High MIN: Low	Includes high low fail-safe mode
D.T.	Delay Time	S: General setting L: Delay of 5 seconds	Material covered: 0.5s Material not covered: 150°C: ≤1.5s 230°C /280°C: ≤2s L sets delay of 5s for covered/uncovered
S.G.	Specific Gravity	H: ≥0.05 g/cm ³ L: ≥0.01 g/cm ³	High Density >0.05 g/cm ³ Low Density >0.01 g/cm ³
S.D.	Self Diagnosis	OFF: Disabled ON: Enabled	ON setting allows the sensor to detect fork abrasion or material build-up; SIG LED will flash if trouble exists
S.S.	Super Switch	OFF: Disabled ON: Enabled	When set ON Output 2 will be dedicated to indicate self-diagnostics alarm exists
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output status mode	F.S. (fail safe) selected = Normal / Alarm status; O.S. (relay output status) selected = Relay energized (on) or de-energized (off)

SEDIMENT DETECTION

- It is only used to detect the sediment under the water, but can't be used for the level detection of the liquid or the doped liquid.
- S.G. (Specific Gravity) shall be adjusted to H position.
- S.D. (Self Diagnosis) shall be switched to OFF position.
- SC352 cable type is inapplicable to this working environment

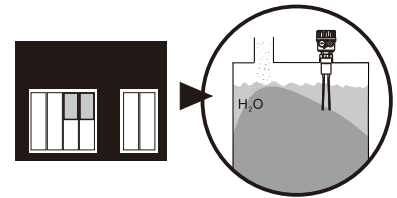


ENVIRONMENT/PROCESS TEMPERATURE LIMITATION

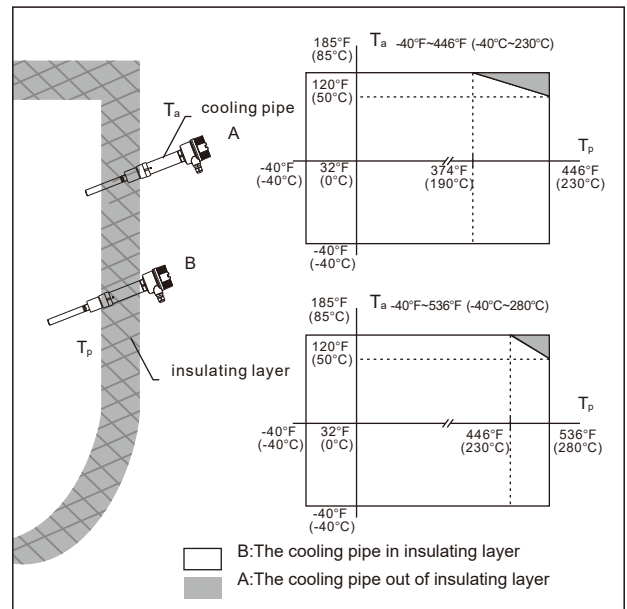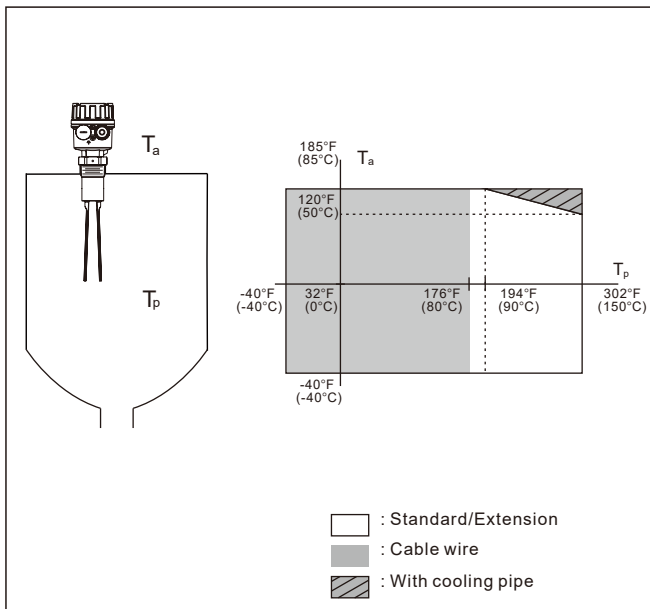

- ※ ETFE coating: T_p max. = 150°C
- ※ PTFE coating: T_p max. = 230°C

SC35 TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS


Wiring configuration
Diagram and introduction
Of features
Dual-relay output

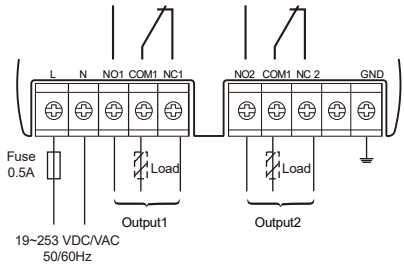

Load: External load
U ~ max. 250VAC@I ~ max. 6A
U = max. 28VDC@I = max. 6A

Failure mode	Material level	Output signal			LED indicators		
		output 1	output 2		Power Green	Status Yellow	Alarm Red
MAX						O.S.	
						O.S.	
MIN						O.S.	
						O.S.	
Viscous material		Maintain the previous state				O.S.	
Wear of tuning fork							

Dual-transistor output

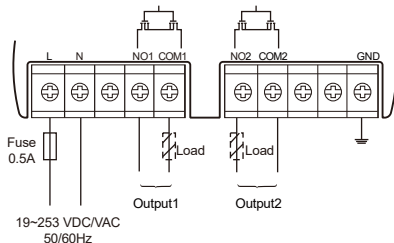

Load: External load
U ~ max. 60VAC@I ~ max. 400mA
U = max. 60VDC@I = max. 400mA
※External load R must be connected

Failure mode	Material level	Output signal			LED indicators		
		output 1	output 2		Power Green	Status Yellow	Alarm Red
MAX						O.S.	
						O.S.	
MIN						O.S.	
						O.S.	
Viscous material		Maintain the previous state				O.S.	
Wear of tuning fork							
Output1>400mA			Maintain the previous state				
Output2>400mA		Maintain the previous state					
Output1& Output2>400mA							

※ When output is off, there will be no error current status

:ON :Flash :OFF

:Relay ON :Relay OFF IL :Load current

SC35 TUNING FORK LEVEL SWITCH

MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC350	SCX3□□□-EC(HC,JC)
SC351	SCX3□□□□-FC(IC,KC)
SC352	SCX3□□□□-DC

ACCESSORIES


Cable Conduit - Ex d IIC

Material: Washer — NBR


Body— Copper alloy(3/4"NPT)

Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)

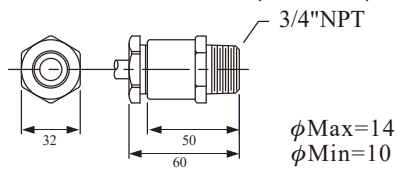

HP415-A23000MG01(29-1108)

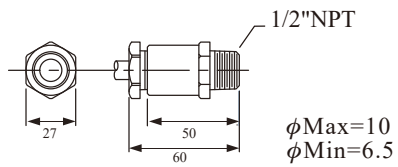

SC35 TUNING FORK LEVEL SWITCH

ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	
SCX3																									
05 06 Model																									
00: Standard (Construction: A, B, D)																									
02: High temperature (Construction: E, F)																									
08: High temperature (Construction: H, I)																									
09: High temperature type 2 (Construction: J, K)																									
07 08 Certification																									
01: None; 1/2" PF																									
02: None; 1/2" NPT																									
03: None; M20x1.5																									
2D: IECEEx-Ex t; 1/2"NPT																									
5D: TS-Ex t; 1/2" NPT																									
7D: NEPSI-Ex d; 1/2" NPT																									
09 Construction																									
A: Standard (150°C @ 50°C)																									
B: Extension type (150°C @ 50°C)																									
D: Cable type (80°C)																									
E: High temperature general type (150°C @ 85°C)																									
F: High temperature extension type (150°C @ 85°C)																									
H: High temperature type (230°C)																									
I: High temperature extension type (230°C)																									
J: High temperature type 2 (280°C)																									
K: High temperature extension type 2 (280°C)																									
10 Fork length																									
C: 155mm																									
11 Housing																									
F: Aluminum																									
R: Stainless steel (No explosion protection)																									
12 Housing cover																									
A: No Lens																									
B: Lens(Only stainless steel)																									

(Next page)

⑬ Power supply

Connection

01: PT male
03: PF male
07: NPT male
40: 5 kg/cm²
42: 10 kg/cm²
48: 150 Lbs
49: 300 Lbs
57: PN10
58: PN16

Code	Probe length
0225~4000	225~4000mm
0750~A200	750~20000mm

SC28 MINI-TYPE

Dimensions (Unit:mm)	Standard Type	Extension Type	Ultra Extension Type	Side View
Model no.	SC28□□□ DIN Connector			
Supply voltage & output	SC280□: 20~250 VAC/VDC, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55 VDC 3wire PNP output; SC28N□□: 12~55 VDC 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP65			
Mounting	3/4"more			
Conduit	Valve plug DIN 43650			

SC28 MINI-TYPE

Dimensions (Unit:mm)	Standard Type	Extension Type	Ultra Extension Type	Side View
Model no.	SC28□□□ M12 Connector			
Supply voltage & output	SC280□: 20~250 VAC/VDC, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55 VDC 3wire PNP output; SC28N□□: 12~55 VDC 3wire NPN output. SC28K: (SIO mode) 12~55 VDC 3wire PNP output; (IO-Link mode) 18~30 VDC 3wire PNP output.*1			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4"more			
Conduit	M12 Connector(180° / 90°)			

Note 1: IO-Link only has M12 connector ,present as PNP output.


SC28 MINI-TYPE

Dimensions (Unit:mm)	Standard Type	Extension Type	Ultra Extension Type	Side View
Model no.	SC28□□□ Cable Wire Type			
Supply voltage & output	SC280□: 20~250 VAC/VDC, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55 VDC 3wire PNP output; SC28N□□: 12~55 VDC 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4"more			
Conduit	Cable connector			

SC28 MINI-TYPE DESCRIPTION OF FEATURES

MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.



SC28 MINI-TYPE DESCRIPTION OF FEATURES

OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED					

It represents Blinking

OUTPUT STATUS FOR PNP / NPN TRANSISTOR

DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking

SC28 MINI-TYPE WIRING INSTRUCTIONS

SC280(TWO WIRES) WIRING



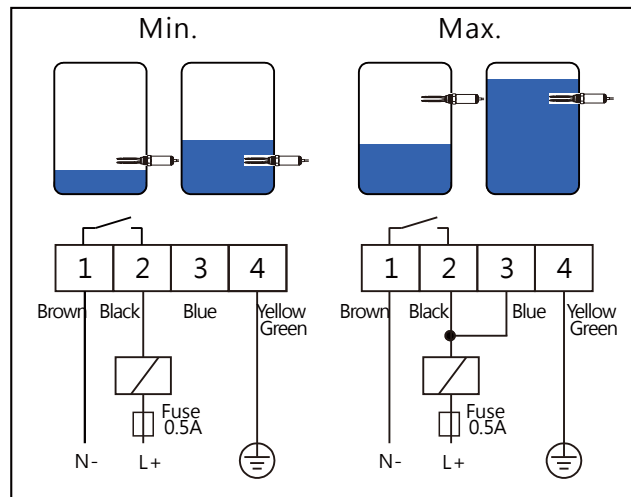


Figure 1 Two Wires Wiring

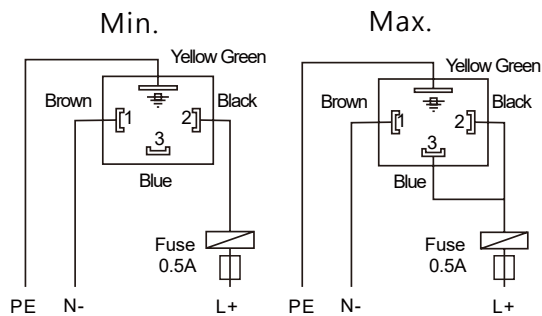

DIN Wiring Diagram

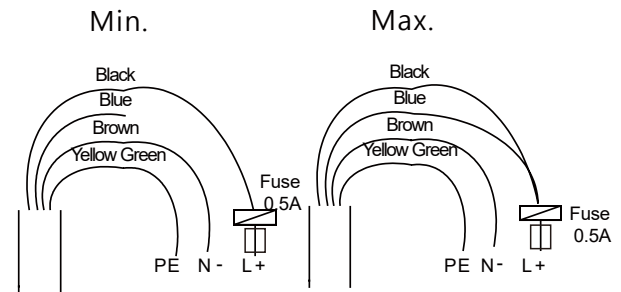

M12x4Pin Cable Wiring Diagram

Wiring

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay.

Pin 4 (Yellow Green) connects to tank ground.

■ High (Max.) mode:


Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay .

Pin 4 (Yellow Green) connects to tank ground.

SC28 MINI-TYPE WIRING INSTRUCTIONS

SC28P/N (THREE WIRES) WIRING

DIN Cable Wiring Diagram

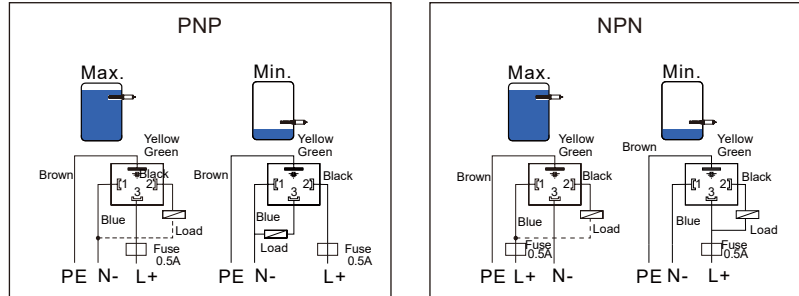

M12x4Pin Wiring Diagram

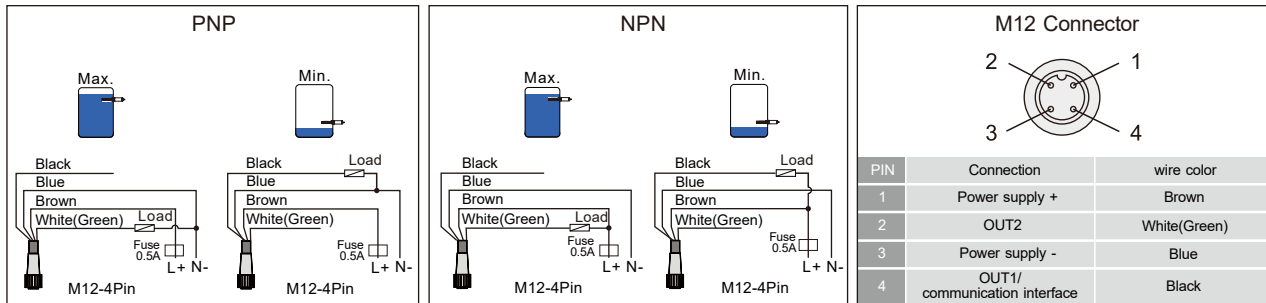


Figure 2 PNP / NPN Output Wiring Diagram

Wiring

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

► DIN & Cable Wiring

PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 2 (Black) connects to L+. To output, Pin 3 (Blue) connects to N- with relay. Pin 4 (Yellow Green) should contact to tank ground.

NPN Output

- High (Max.) Mode: Pin 1 (Brown) connects to L+. Pin 3 (Blue) connects to N-. To output, Pin 2 (Black) connects to L+ with relay. Pin 4(Yellow Green) should contact to tank ground.
- Low(Min.)Mode: Pin1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact To tank ground.

► M12 x 4Pin Wiring:

PNP Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin W hite(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

SC28 MINI-TYPE
MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC280□□	SCX50000-□AC□T
SC28P□□	SCX50000-□AC□P
SC28N□□	SCX50000-□AC□N
SC280□□T	SCX50200-□AC□T
SC28P□□T	SCX50200-□AC□P
SC28N□□T	SCX50200-□AC□N

SC28 MINI-TYPE ORDER INFORMATION

SCX 5

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

05 06

Model

00: Standard

02: High temperature

07 08

Certification

00: None

09

Construction

A: Standard

B: Extension type

C: Ultra extension type

E: High temperature general type

F: High temperature extension type

G: High temperature ultra extension type

10

Fork length

A: 40mm

11

Housing

C: Compact

12

Housing cover

C: Cable

D: DIN43650

M: M12x1(180°)

N: M12x1(90°)

※M12x1 with cable, standard cable length 2M,
PVC 24AWG

※Only option M,N can be selected for IO-Link version.

13

Power supply

T: 20~250VAC/VDC, 50/60Hz; 2 wire contactless electronic switch

P: 12~55VDC; 3 wire PNP output

N: 12~55VDC; 3 wire NPN output

K: IO-Link; 3 wire PNP output.

(Next page)

33

SC28 MINI-TYPE ORDER INFORMATION

SCX 5 05 06 07 08 09 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28

Connection

14 15

AA: JIS
AB: ISO
AC: ANSI/ASTM
AD: DIN
AG: IDF
AI: 3A
AJ: JIS-RF
AK: JIS-FF
AN: ANSI-RF
AO: ANSI-FF
AR: DIN-RF
AS: DIN-FF

16 17

A7: 3/4"
A8: 1"
A9: 1-1/4"
B1: 1-1/2"
B2: 2"
B3: 2-1/4"
B4: 2-1/2"
B5: 3"
B6: 3-1/2"
B7: 4"
B8: 5"
B9: 6"
D7: DN20
D8: DN25
D9: DN32
E1: DN40
E2: DN50
E3: DN65
E4: DN80

18 19

00: None
01: PT male
03: PF male
05: BSP male
07: NPT male
40: 5kg/cm²
42: 10kg/cm²
48: 150Lbs
49: 300Lbs
51: 600Lbs
57: PN 10
58: PN 16
59: PN 25
60: PN 40
62: PN 0.6 Mpa
63: PN 1.0 Mpa
64: PN 1.6 Mpa
65: PN 2.5 Mpa
66: PN 4.0 Mpa

20 21 Probe material

MA: SUS304
MB: SUS316
MC: SUS316L

22 23 Coating material

00: None

24 Surface roughness

B: Ra≤1.5um
C: Ra≤0.8um

25 26 27 28 Probe length

Code	Probe length	Remarks
0054	54mm	Compact-hidden plate type
0076	76mm	Compact-thread type
0098	98mm	Compact-hidden extension type
0120	120mm	Compact-thread extension type
0099~0250	99~250mm	Compact-hidden plate lengthened type
0121~0250	121~250mm	Compact-thread lengthened type

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)			
	SC380 Standard Type	SC381 Extension Type	SC382 Ultra Extension Type

Output type	 8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type
Working voltage	11 ~36 VDC	10 ~55 VDC	19~253 VAC/VDC, 50/60Hz
Power consumption	< 600mW	< 830mW	Max. 1.3W
Input protection	Reversed power supply protection function		NA
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~85 °C (Intrinsically safe type -40~70 °C)	-40~85 °C(Refernce operation manual)	
Process temp.	-40~150 °C		
Applicable density liquid	≥0.5 g/cm³ or ≥0.7 g/cm³		
Liquid viscosity	Max.10000mm² / S(10000cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.100 bar		
Output signal	Intrinsically safe signal 8 / 216mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output
Contact capacity	NA	350mA · 55 VDC	6A / 250 VAC · 6A / 28VDC
Protection level	IP66/67		
Probe material	SUS 304 / 2316 / 316L		
Intrinsically safe parameters	Ui(V)=36V · li=100mA,Pi=1W Ci(nF)=0 · Li(uH)=0※	NA	NA

※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia).

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)			
	SC380 High-temp. Type	SC381 High-temp. Extension Type	SC382 High-temp. Ultra Extension Type

Output type	 8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type
Working voltage	11 ~36 VDC	10 ~55 VDC	19~253VAC/VDC, 50/60Hz
Power consumption	< 600mW	< 830mW	Max. 1.3W
Input protection	Reversed power supply protection function		NA
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~85 °C(Refernce operation manual)		
Process temp.	-40~150 °C		
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³		
Liquid viscosity	Max.10000 mm ² / S(10000 cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.100 bar		
Output signal	Intrinsically safe signal 8/16 mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output
Contact capacity	NA	350 mA · 55 VDC	6A / 250 VAC · 6A / 28 VDC
Protection level	IP66/67		
Probe material	SUS 304 / 316 / 316L		
Intrinsically safe parameters	Ui(V)=36V · li=100mA,Pi=1W Ci(nF)=0 · Li(uH)=0※	NA	NA

※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia).


SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES


FORK TRIGGER POINT

The position of the SC38 fork trigger point depends on the mounting position as shown in the figure below: (When the testing medium is water, S.G.=1 g/cm³, distance of the trigger point is 13mm). If the testing medium has an S.G lower than 1g/cm³, the trigger point would rise. Similarly, the trigger point will move downward while the S.G is greater than water. The moving distance is subject to the S.G.

※ Operating point position: ◀




ENVIRONMENT AND PROCESS TEMPERATURE LIMITATION

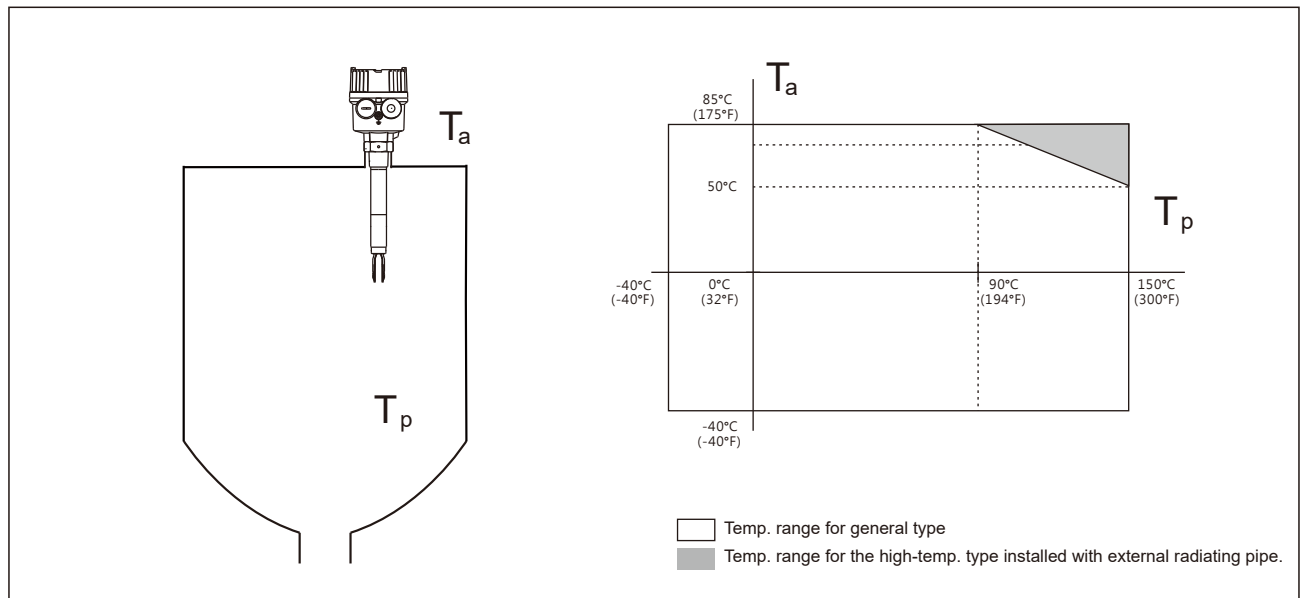

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

PANEL INTRODUCTION

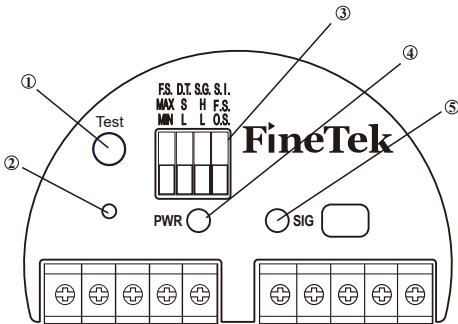

- ① :Test button
- ② :Operation point calibration button
- ③ :Function adjustment button
- ④ :Power indicator
- ⑤ :Status indicator


Abbreviation	Function	Option Description	Remarks
Test	Test button	Reverse the signal output	It is for the test after the installation is completed.
F.S.	Fail-Safe	MAX: High MIN: Low	It is for the high and low Fail-Safe mode.
D.T.	Delay Time	S: General setting L: Delay for 5 seconds	Covered by material: Approx. 0.5s Not covered by material: Approx. 1s Switch to L to set it at 5 seconds for either covered or not covered by material.
S.G.	Specific Gravity	H: $\geq 0.7 \text{ g/cm}^3$ L: $\geq 0.5 \text{ g/cm}^3$	The switch to set the material density.
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output mode	Turn ON/OFF the yellow indicator based on the output status or the fail-safe status.

DESCRIPTION OF THE TEST BUTTON

This button is mainly provided for the user to check whether the output operation works normally after the installation is completed. When the button is pressed, the output current (8mA $\leftrightarrow$ 16mA) and indicator (ON $\leftrightarrow$ OFF) will be reversed. Once the button is released, it will recover the original status.

FUNCTION OF CUSTOMIZED OPERATION POINT POSITION

SC38 provides the function of customizing the operation point position according to what is required by the user.



Settings

1.Keep pressing “Calibration Button” for 3 seconds. When the red and green LED indicators flash every 0.5 second, it enters the calibration mode. Press the calibration button again to enter the Empty Bin Calibration mode.

[Empty Bin Calibration]

- Calibration status: The red LED indicator flashes every 0.5 second, and the output current switches to operate every 0.5 second (8 $\leftrightarrow$ 16mA).
- This mode is to calibrate the vibration frequency of the tuning fork in the air. Press “Calibration Button” when the tuning fork doesn’t touch any material. The unit will record the vibration frequency in the air, and enter the operation point calibration mode.


[Operation Point Calibration]

- Calibration status: The red LED indicator flashes every 0.25 second, and the output current switches to operate every 0.25 second (8 $\leftrightarrow$ 16mA).
- Cover the material to the desired operating point position under this mode, and then press “Calibration Button”. It will be adjusted to the corresponding operating point position according to the H/L setting of the S.G.

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS

WIRING CONFIGURATION DIAGRAM AND INTRODUCTION OF FEATURES


8/16mA output

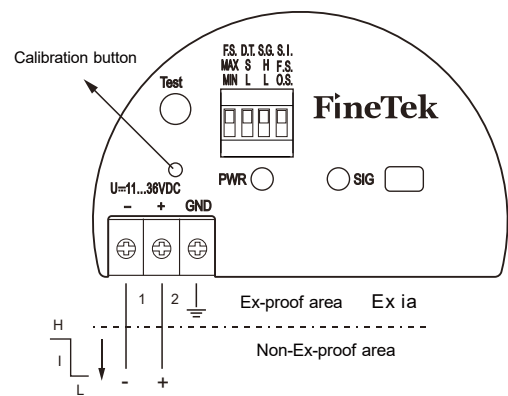

Failure mode	Material level	Output signal	LED indicators
MAX		+ 2 ~16mA → 1	O.S. F.S.
		+ 2 ~8mA → 1	O.S. F.S.
MIN		+ 2 ~16mA → 1	O.S. F.S.
		+ 2 ~8mA → 1	O.S. F.S.
Instrument failure		+ 2 <3.6mA → 1	

~16mA=16mA ±5% :ON :Flash :OFF
~8mA=8mA ±5%


PNP/NPN Output

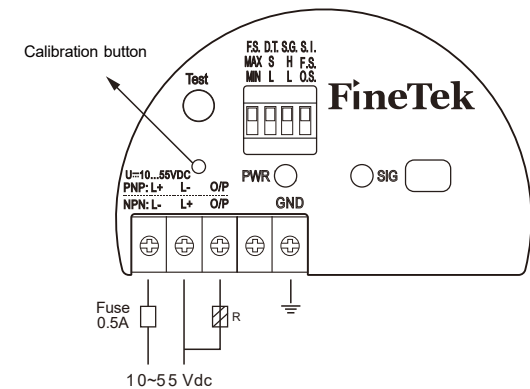

Failure mode	Material level	Output signal	LED indicators
MAX		I _L →	O.S. F.S.
		<100μA →	O.S. F.S.
MIN		I _L →	O.S. F.S.
		<100μA →	O.S. F.S.
Instrument failure		<100μA →	
Over Load(I _L >350mA)		<100μA →	

I_L : Load current :ON :Flash :OFF
R : External load
U = max. 55VDC@I = max. 350mA

Dual Relay output

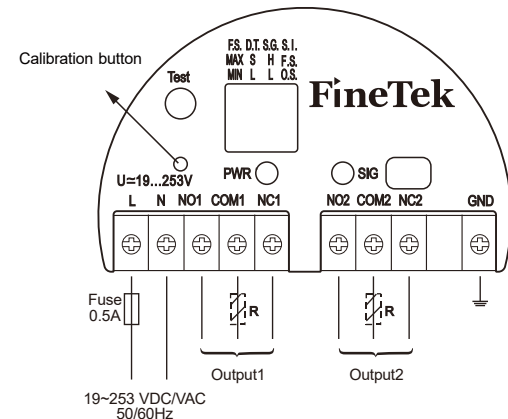

Failure mode	Material level	Output signal	LED indicators	
			PWR	SIG
MAX		NO1 COM1 NC1 NO2 COM2 NC2	O.S. F.S.	
		NO1 COM1 NC1 NO2 COM2 NC2	O.S. F.S.	
MIN		NO1 COM1 NC1 NO2 COM2 NC2	O.S. F.S.	
		NO1 COM1 NC1 NO2 COM2 NC2	O.S. F.S.	
Instrument failure		NO1 COM1 NC1 NO2 COM2 NC2		

R: External load
U ~ max. 250VAC@I ~ max. 6A
U = max. 28VDC@I = max. 6A
 :ON :Flash :OFF

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC380C□□□□0	SCX500□□-AA
SC380F□□□□0	
SC380G□□□□0	
SC381C□□□□1	SCX500□□-BA
SC381F□□□□1	
SC381G□□□□1	
SC382C□□□□2	SCX500□□-CA
SC382F□□□□2	
SC382G□□□□2	
SC380C□□□□3	SCX502□□-EA
SC380F□□□□3	
SC380G□□□□3	
SC381C□□□□4	SCX502□□-FA
SC381F□□□□4	
SC381G□□□□4	
SC382C□□□□5	SCX502□□-GA
SC382F□□□□5	
SC382G□□□□5	


ACCESSORIES

Cable Conduit - Ex d IIC


Material: Washer — NBR

Body— Copper alloy(3/4"NPT)
Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)



HP415-A23000MG01(29-1108)



SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
SCX 5	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	☐
05 06 Model																								
00: Standard																								
02: High temperature																								
07 08 Certification																								
01: None, 1/2"PF																								
02: None, 1/2"NPT																								
7B: NEPSI-Ex ia, 1/2"NPT																								
09 Construction																								
A: Standard																								
B: Extended type																								
C: Ultra extension type																								
E: High temperature general type																								
F: High temperature extension type																								
G: High temperature ultra extension type																								
10 Fork length																								
A: 40mm																								
11 Housing																								
F: Shared junction box(Aluminum box)																								
R: Shared junction box(Stainless steel)																								
12 Housing cover																								
A: Without lens(Shared junction box)																								
B: With lens(Shared junction box)(Only stainless steel)																								
13 Power supply																								
A: 19~253V AC/VDC, 50/60Hz;Two relay output																								
C: 10~55 VDC ;3 wire PNP/NPN output																								
D: 11~36 VDC ;8/16mA output																								

(Next page)

SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

ORDER INFORMATION

SCX 5

Connection

⑭ ⑮

AA: JIS
AB: ISO
AC: ANSI/ASTM
AD: DIN
AG: IDF
AI: 3A
AJ: JIS-RF
AK: JIS-FF
AN: ANSI-RF
AO: ANSI-FF
AR: DIN-RF
AS: DIN-FF

⑯ ⑰

A7: 3/4"
A8: 1"
A9: 1-1/4"
B1: 1-1/2"
B2: 2"
B3: 2-1/4"
B4: 2-1/2"
B5: 3"
B6: 3-1/2"
B7: 4"
B8: 5"
B9: 6"
D7: DN20
D8: DN25
D9: DN32
E1: DN40
E2: DN50
E3: DN65
E4: DN80

⑱ ⑲

00: None
01: PT male
03: PF male
05: BSP male
07: NPT male
40: 5kg/cm²
42: 10kg/cm²
48: 150Lbs
49: 300Lbs
51: 600Lbs
57: PN 10
58: PN 16
59: PN 25
60: PN 40
62: PN 0.6 Mpa
63: PN 1.0 Mpa
64: PN 1.6 Mpa
65: PN 2.5 Mpa
66: PN 4.0 Mpa

⑳ ㉑ Probe material

MA: SUS304
MB: SUS316
MC: SUS316L

㉒ ㉓ Coating material

00: None
36: ETFE

㉔ Surface roughness

B: Ra≤1.5um
C: Ra≤0.8um

㉕ ㉖ ㉗ ㉘ Probe length

Code	Probe length	Remarks
0054	54mm	Shared junction box-hidden plate type
0076	76mm	Shared junction box-thread type
0098	98mm	Shared junction box-hidden extension type
0120	120mm	Shared junction box-thread extension type
0099~3000	99~3000mm	Shared junction box-hidden plate lengthened type
0121~3000	121~3000mm	Shared junction box-thread lengthened type

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)			
	Standard Type	Extension Type	Ultra Extension Type

Output type	8/16mA output type	3 Wires (NPN/PNP) output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc
Power consumption	< 600mW	< 830mW
Input protection	Reversed power supply protection function	
Overvoltage protection	overvoltage category III	
Measuring error	Max.±1mm	
Repeatability	0.5mm	
Hysteresis band	Approx.2mm	
Ambient temp.	-40~60°C (Refernce operation manual)	
Process temp.	-40~150°C (Refernce operation manual)	
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³	
Liquid viscosity	Max.10000mm ² / S(10000cSt)	
Granule size contained in the liquid	Max.φ5 mm	
External diameter of conduit cable	φ6~φ10 mm	
Process pressure	Max.200 bar	
Output signal	Signal 8 / 16mA	Transistor output (NPN/PNP)
Contact capacity	NA	350mA · 55Vdc
Protection level	IP67	
Probe material	SUS 304 / 316 / 316L	

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)			
	Standard Type	Extension Type	Ultra Extension Type

Output type	Dual-relay output type	Dual Transistor output type
Working voltage	19~253Vac,50 / 60Hz; 20~72Vdc	
Power consumption	Max. 1.3W	
Input protection	NA	
Overvoltage protection	overvoltage category III	
Measuring error	Max.±1mm	
Repeatability	0.5mm	
Hysteresis band	Approx.2mm	
Ambient temp.	-40~60°C (Refernce operation manual)	
Process temp.	-40~150°C (Refernce operation manual)	
Applicable density liquid	≥0.5 g/cm³ or ≥0.7 g/cm³	
Liquid viscosity	Max.10000mm² / S(10000cSt)	
Granule size contained in the liquid	Max.φ5 mm	
External diameter of conduit cable	φ6~φ10 mm	
Process pressure	Max.200 bar	
Output signal	2 Sets of SPDT relay output	2 x SSR(N.O)
Contact capacity	6A / 250Vac · 6A / 28Vdc	400mA, 60Vac / Vdc
Protection level	IP67	
Probe material	SUS 304 / 316 / 316L	

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)			
	High-temp. Standard Type		
	High-temp. Extension Type		
	High-temp. Ultra Extension Type		

Output type	8/16mA output type	3 Wires (NPN/PNP) output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc
Power consumption	< 600mW	< 830mW
Input protection	Reversed power supply protection function	
Overvoltage protection	overvoltage category III	
Measuring error	Max.±1mm	
Repeatability	0.5mm	
Hysteresis band	Approx.2mm	
Ambient temp.	-40~60°C (Reference operation manual)	
Process temp.	-40~150°C (Reference operation manual)	
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³	
Liquid viscosity	Max.10000mm ² / S(10000cSt)	
Granule size contained in the liquid	Max.φ5 mm	
External diameter of conduit cable	φ6~φ10 mm	
Process pressure	Max.200 bar	
Output signal	8/16mA	Transistor output (NPN/PNP)
Contact capacity	NA	350mA · 55Vdc
Protection level	IP67	
Probe material	SUS 304 / 316 / 316L	

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)	High-temp. Standard Type	High-temp. Extension Type	High-temp. Ultra Extension Type

Output type	Dual-relay output type		Dual Transistor output type
Working voltage	19~253Vac,50 / 60Hz; 20~72Vdc		
Power consumption	Max. 1.3W		
Input protection	NA		
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~60°C (Refernce operation manual)		
Process temp.	-40~150°C (Refernce operation manual)		
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³		
Liquid viscosity	Max.10000mm ² / S(10000cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.200 bar		
Output signal	2 Sets of SPDT relay output		2 x SSR(N.O)
Contact capacity	6A / 250Vac · 6A / 28Vdc		400mA, 60Vac / Vdc
Protection level	IP67		
Probe material	SUS 304 / 316 / 316L		

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)			
	Super High-temp. Standard Type	Super High-temp. Extension Type	Super High-temp. Ultra Extension Type

Output type	8/16mA output type	3 Wires (NPN/PNP) output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc
Power consumption	< 600mW	< 830mW
Input protection	Reversed power supply protection function	
Overvoltage protection	overvoltage category III	
Measuring error	Max.±1mm	
Repeatability	0.5mm	
Hysteresis band	Approx.2mm	
Ambient temp.	-40~60°C (Reference operation manual)	
Process temp.	-40~220°C (Reference operation manual)	
Applicable density liquid	≥0.5 g/cm ³ or ≥0.7 g/cm ³	
Liquid viscosity	Max.10000mm ² / S(10000cSt)	
Granule size contained in the liquid	Max.φ5 mm	
External diameter of conduit cable	φ6~φ10 mm	
Process pressure	Max.200 bar	
Output signal	8/16mA	Transistor output (NPN/PNP)
Contact capacity	NA	350mA · 55Vdc
Protection level	IP67	
Probe material	SUS 304 / 316 / 316L	

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



IECEX Ex db IIC T6...T2 Ga/Gb

Dimensions (Unit:mm)			
	Super High-temp. Standard Type	Super High-temp. Extension Type	Super High-temp. Ultra Extension Type

Output type	Dual-relay output type	Dual Transistor output type
Working voltage	19~253Vac,50 / 60Hz; 20~72Vdc	
Power consumption	Max. 1.3W	
Input protection	NA	
Overvoltage protection	overvoltage category III	
Measuring error	Max.±1mm	
Repeatability	0.5mm	
Hysteresis band	Approx.2mm	
Ambient temp.	-40~60°C (Refernce operation manual)	
Process temp.	-40~220°C (Refernce operation manual)	
Applicable density liquid	≥0.5 g/cm³ or ≥0.7 g/cm³	
Liquid viscosity	Max.10000mm² / S(10000cSt)	
Granule size contained in the liquid	Max.φ5 mm	
External diameter of conduit cable	φ6~φ10 mm	
Process pressure	Max.200 bar	
Output signal	2 Sets of SPDT relay output	2 x SSR(N.O)
Contact capacity	6A / 250Vac · 6A / 28Vdc	400mA, 60Vac / Vdc
Protection level	IP67	
Probe material	SUS 304 / 316 / 316L	


SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

FORK TRIGGER POINT

The position of the SCX5 fork trigger point depends on the mounting position as shown in the figure below: (When the testing medium is water, S.G.=1 g/cm³, distance of the trigger point is 13mm). If the testing medium has an S.G lower than 1g/cm³, the trigger point would rise. Similarly, the trigger point will move downward while the S.G is greater than water. The moving distance is subject to the S.G.

※ Operating point position: ◀



SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28				
SCX 5																												
⑤⑥ Model																												
00: Standard																												
02: High temperature																												
09: Super high temperature																												
⑦⑧ Certification																												
2C: IECEx-Ex d																												
⑨ Construction																												
A: Standard type																												
B: Extended type																												
C: Ultra extension type																												
E: High temperature standard type/ Super high temperature standard type																												
F: High temperature extension type/ Super high temperature extension type																												
G: High temperature ultra extension type/ Super high temperature ultra extension type																												
⑩ Fork length																												
A: 40mm																												
⑪ Housing																												
F: Shared junction box I(Aluminum housing with silver color)																												
H: Shared junction box II(Aluminum housing with silver color)																												
⑫ Housing cover																												
A: Without lens(Shared junction box)																												
⑬ Power supply																												
A: 19~253VAC, 50/60Hz , 20~72VDC ; Two Relay output																												
B: 19~253VAC, 50/60Hz, 20~72VDC;Two Transistor output																												
C: 10~55VDC;3 wire PNP/NPN output																												
D: 11~36VDC;8/16mA output																												

(Next page)

SCX5 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

DESCRIPTION OF FEATURES

SCX 5 ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘

Connection

⑭ ⑮

AA: JIS
AB: ISO
AC: ANSI/ASTM
AD: DIN
AG: IDF
AI: 3A
AJ: JIS-RF
AK: JIS-FF
AN: ANSI-RF
AO: ANSI-FF
AR: DIN-RF
AS: DIN-FF

⑯ ⑰

A7: 3/4"
A8: 1"
A9: 1-1/4"
B1: 1-1/2"
B2: 2"
B3: 2-1/4"
B4: 2-1/2"
B5: 3"
B6: 3-1/2"
B7: 4"
B8: 5"
B9: 6"
D7: DN20
D8: DN25
D9: DN32
E1: DN40
E2: DN50
E3: DN65
E4: DN80

⑱ ⑲

00: None
01: PT male
03: PF male
05: BSP male
07: NPT male
40: 5kg/cm²
42: 10kg/cm²
48: 150Lbs
49: 300Lbs
51: 600Lbs
57: PN 10
58: PN 16
59: PN 25
60: PN 40
62: PN 0.6 Mpa
63: PN 1.0 Mpa
64: PN 1.6 Mpa
65: PN 2.5 Mpa
66: PN 4.0 Mpa

㉑ ㉒ Probe material

MA: SUS304
MB: SUS316
MC: SUS316L

㉒ ㉓ Coating material

00: None
14: PFA
21: PTFE
34: ECTFE
36: ETFE

㉔ Surface roughness

B: Ra≤1.5um
C: Ra≤0.8um
D: Ra≤0.3um

㉕ ㉖ ㉗ ㉘ Probe length

Code	Probe length	Remarks
0054	54mm	Shared junction box-hidden plate type
0075	75mm	Shared junction box-thread type
0055~0098	55~98mm	Shared junction box-hidden extension type
0076~0120	76~120mm	Shared junction box-thread extension type
0099~3000	99~3000mm	Shared junction box-hidden plate lengthened type
0121~3000	121~3000mm	Shared junction box-thread lengthened type

Global Network



Head Quarter

- Taiwan
FineTek Co., Ltd. - Taipei Head Quarter
No.16, Tzuchiang St., Tucheng Industrial Park
New Taipei City 236, Taiwan
TEL: 886-2-2269-6789
FAX: 886-2-2268-6682
EMAIL: info@fine-tek.com

North America

- California, U.S.
Aplus Finetek Sensor Inc. - US Office
355 S. Lemon Ave, Suite D
Walnut, CA 91789
TEL: 1 909 598 2488
FAX: 1 909 598 3188
EMAIL: info@aplusfine.com

Europe

- Germany
FineTek GmbH - Germany Office
Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-12
FAX: +49-(0)4185-8083-80
EMAIL: info@fine-tek.de

Asia

- China
Fine automation Co., Ltd. - Shanghai Factory
No.451 DuHui Rd, MinHang District, Shanghai,
China 201109
TEL: 86-21-6490-7260
EMAIL: info.sh@fine-tek.com

- Singapore
FineTek Pte Ltd. - Singapore Office
37 Kaki Bukit Place, Level 4 Singapore 416215
TEL: 65-6452-6340
EMAIL: info.sg@fine-tek.com

- Indonesia
PT. FineTek Automation Indonesia - Indonesia Office
PERGUDANGAN TUNAS BITUNG
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15,
Bitung Cikupa, Tangerang 15710
TEL: 62 (021)-2958-1688
EMAIL: info.id@fine-tek.com

- Müttec Instruments GmbH - Germany Office
Bei den Kämpen 26
21220 Seevetal-Ramelsloh, Germany
TEL: +49-(0)4185-8083-0
FAX: +49-(0)4185-8083-80
EMAIL: muetec@muetec.de

Lorem ipsum



Distributor: