




## Tuning Fork Level Switch

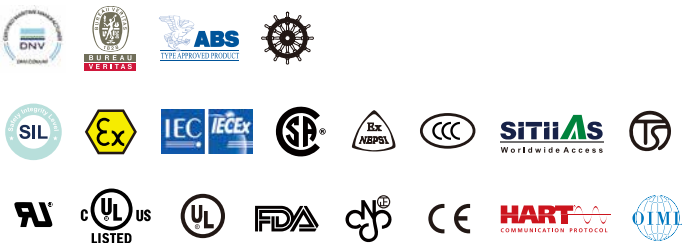

# CATALOGUE

1. PRODUCT INTRODUCTION.....	1
2. PRODUCT SERIES(1)	
SC14 STANDARD TYPE.....	4
SC17 EX-PROOF TYPE.....	5
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE DESCRIPTION OF FEATURES .....	6
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE WIRING INSTRUCTIONS.....	7
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	8
SC14 STANDARD TYPE / SC17 EX-PROOF TYPE ORDER INFORMATION .....	9
3. PRODUCT SERIES(2)	
SC24 LITE-TYPE.....	11
SC24 LITE-TYPE DESCRIPTION OF FEATURES.....	12
SC24 LITE-TYPE WIRING INSTRUCTIONS.....	14
SC24 LITE-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	16
SC24 LITE-TYPE ORDER INFORMATION.....	17
4. PRODUCT SERIES(3)	
SC35 TUNING FORK LEVEL SWITCH .....	18
SC35 TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES.....	20
SC35 TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS .....	21
SC35 TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	22
SC35 TUNING FORK LEVEL SWITCH ORDER INFORMATION.....	23
5. PRODUCT SERIES(4)	
SC28 MINI-TYPE.....	25
SC28 MINI-TYPE DESCRIPTION OF FEATURES.....	28
SC28 MINI-TYPE WIRING INSTRUCTIONS .....	30
SC28 MINI-TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	32
SC28 MINI-TYPE ORDER INFORMATION.....	33
6. PRODUCT SERIES(5)	
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH.....	35
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES.....	37
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS.....	39
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE.....	40
SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH ORDER INFORMATION.....	41

# PRODUCT INTRODUCTION

## WORKING PRINCIPLE

The SC series is a vibrating tuning fork point level sensor that utilizes piezoelectric crystal and solidstate electronics technology to produce vibration in the tuning fork element at a specific frequency and receive electronic feedback. When the probe element is in contact with the target material, the vibration is dampened, the electronic feedback changes, and presence of the material is thereby sensed by the electronics which changes the state of the sensor output to indicate material presence. When the probe element is again free of the target material, the vibration again is produced and the output state reverts to indicate material absence.

## FEATURE

- SPDT Relay output, SSR MOSFET output.
- Wide voltage supply range 20~250 Vac/Vdc,50/60Hz
- No frequent calibration required, easy-to-use, sturdy and durable design. High/low failure safe mode, safe and reliable.
- Sensitivity adjustment is available for different densities of media. Fine powder can be detected.
- Suitable for liquid, powder, and solid application.
- Dual insulation can reduce damage on the PCB board caused by great changes in temperature and humidity, as well as condensation effects (SC39 series).
- It can be tested by pressing the test button after installation (SC39 series).
- Output switch delay function (SC39 series).
- Self-diagnosis mechanism can detect the abnormality such as the abrasion of the tuning fork or the material viscosity (SC39 series).
- The compact built-in wiring box can save the installation space (SC39 series).
- The wiring box can rotate 270 degrees, facilitating adjustment of the inlet direction (SC39 series).
- The minimum measurable specific gravity can reach 0.01 g/cm<sup>3</sup> (SC35 series).
- Ultra protection mechanism can set the secondary output contact point as alarm output (SC35 series).
- Support the function of detecting underwater sediments (SC35 series).
- All-in-one design, 3/4" (SC38), 1" thread is suitable for the installation of a small tube.
- Adjustment setting for different densities of media  $P > 0.5 \text{ g/cm}^3$  or  $p.0.7 \text{ g/cm}^3$  (SC38).
- Switch delay setting function (SC39 series).
- Alarm indicators based on failure status or output status selected according to the customer's habits (SC39 series).
- Automatic calibration of the operation points for different densities of media as required by the customer (SC38).
- Support IO-Link digital communication (SC29).

## APPLICABLE MATERIALS

The tuning fork level switch can be widely applied to detect the min. and max. level in tanks, silos and hoppers filled with materials of different densities and state. The following is a list of applications.

### POWDER

- |                        |                        |
|------------------------|------------------------|
| 1. Powdered milk       | 15. Pellets            |
| 2. Frozen potato chips | 16. Peanuts            |
| 3. Beans               | 17. Tobacco            |
| 4. Sugar               | 18. Wood shavings      |
| 5. Sweets              | 19. Chalk              |
| 6. Coffee beans        | 20. Stearin chips      |
| 7. Coffee powder       | 21. Powdered cellulose |
| 8. Frozen dry coffee   | 22. Glass fine power   |
| 9. Tea                 | 23. Granular plastics  |
| 10. Salt               | 24. Gravel             |
| 11. Flour              | 25. Powdered clay      |
| 12. Foundry sand       | 26. Polystyrene powder |
| 13. Spices             | 27. Styrofoam          |
| 14. Animal food        | 28. Soda               |

### LIQUID

1. Water & Solutions
2. General Purpose Solvent
3. Soy sauce
4. Heavy oil
5. Petroleum
6. Oil
7. Ink
8. Cream
9. Drink & Beverage
10. Corrosive liquid







## APPLICATION SCOPE

It is applicable to the max. and min. level detection of the tanks or tubes filled with various solid/liquid media. The product has a variety of applications, such as in the chemical fiber industry, rubber industry, tire industry, cement industry, steel industry, food industry, pharmaceutical industry, and animal feed factories in terms of the level detection for the bins of the raw material/process/finished products

## APPLICATION EXAMPLE

Application situation	SC24	SC28	SC14X	SC17X	SC35X	SC38X
Liquid	★	★	★	★		★
Powder	★		★	★	★	
Solid					★	
Corrosive media			Optional			
Explosion proof				★	★	★
Tri-Clamp connection	Optional	Optional	Optional			Optional
Operation temp. 100°C	★	★				
Operation temp. 130°C			★	★		
Operation temp. 150°C					★	★
Operation temp. 280°C					★	
Max. pressure<25bar					★	
Max. pressure<40bar	★	★	★	★		★

# PRODUCT DIMENSIONS

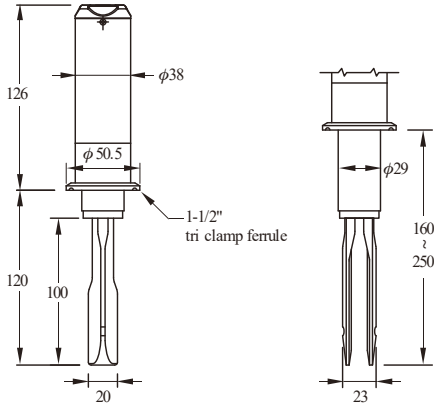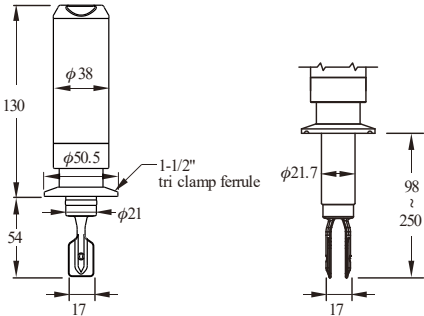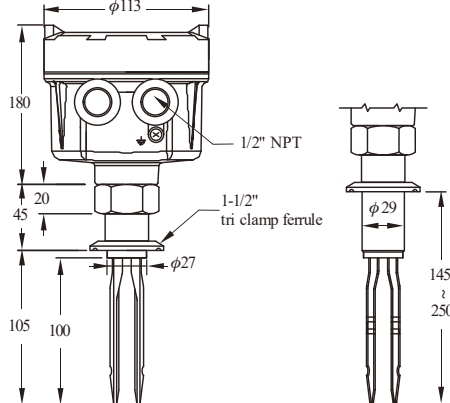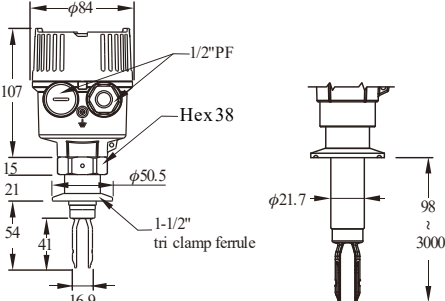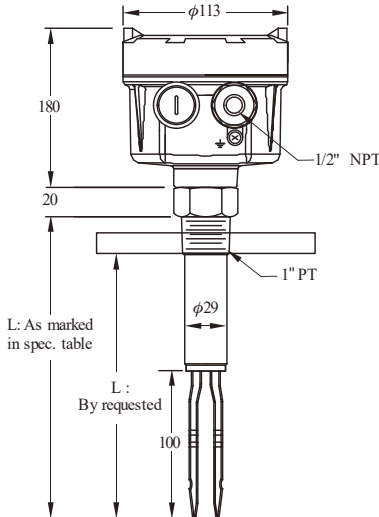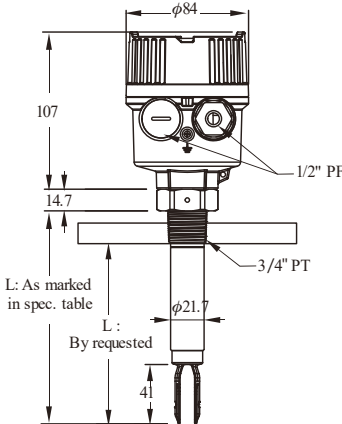SC24 Series tri clamp ferrule connection	SC28 Series tri clamp ferrule connection
 <p>Standard type      Extended type</p>	 <p>Standard type      Ultra Extension type</p>
SC14 Series tri clamp ferrule connection	SC38 Series tri clamp ferrule connection
 <p>Standard type      Extended type</p>	 <p>Standard type      Ultra Extension type</p>
SC14 Series flange connection	SC38 Series flange connection
 <p>L: As marked in spec. table L: By requested</p>	 <p>L: As marked in spec. table L: By requested</p>

# SC14 STANDARD TYPE



Dimensions (Unit:mm)			
Model No.	SC1400 Standard Type	SC1410 Tuning Fork Ultra Extension Type	SC1420 Tuning Fork Extension Type
Level sensor housing	Aluminum / IP65		
Probe material	SUS 304 / 316 / 316L		
Mounting	1"PT		
Conduit	1/2"NPTx2		
Max. vertical load on rod.	177in.Lbs(20Nm)		
Process pressure.	-1~600PSI (40bar)		
Power supply	20~250Vac / Vdc,50 / 60Hz		
Power consumption	10VA		
Ambient temp.	-40°C~60°C		
Process temp.	-40°C~130°C		
Signal output	Relay, SPDT, 5A/250Vac, 1 set or 2 set SSR(MOSFET) 400mA/60 Vac / Vdc, 1 set or 2 set		
Min. material density sensed	Solid:≥0.07g/cm <sup>3</sup> , Liquid: ≥0.7g/cm <sup>3</sup>		
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset		
Vibrating frequency.	350~370Hz		
Selectable Fail-safe	Hi. / Lo.		
Selectable sensitivity	Hi. / Lo.		



# SC17 EX-PROOF TYPE



NEPSI Ex d IIC T3~T6 Gb  
 Ex tD A20 / A21 IP65 T80B' / T95B' / T130B' / T195B'  
 ATEX Ⓢ II 2 G Ex db IIB T4 or T5 or T6 Gb  
 Ⓢ II 2 D Ex tb IIIC T130BC or T95BC or T80BC Db  
 IECEx Ex db IIB T4 or T5 or T6 Gb  
 Ex tb IIIC T130BC or T95BC or T80BC Db


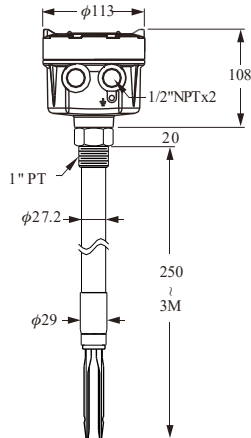
Dimensions (Unit:mm)		
Model No.	<b>SC1740</b> <b>Standard Type</b>	<b>SC1741 Tuning Fork</b> <b>Ultra Extension Type</b>
Level sensor housing	Aluminum / IP65	
Probe material	SUS 304 / 316 / 316L	
Mounting	1"PT	1"PT
Conduit	1/2"NPT×2	
Max. vertical load on rod.	177in.Lbs(20Nm)	
Process pressure.	-1~600PSI (40bar)	
Power supply	20~250,50/60Hz Vac/Vdc	
Power consumption	10VA	
Ambient temp.	-20℃~70℃	
Process temp.	-40℃~125℃	
Signal output	Relay, SPDT, 3A / 250Vac, 1 set or 2 set SSR(MOSFET) 400mA/60 Vac / Vdc, 1 set or 2 set	
Min. material density sensed	Solid: ≥0.07g/cm <sup>3</sup> , Liquid: ≥0.7g/cm <sup>3</sup> , viscosity : 1~10000	
Time delay	0.6 Second / Operate; 1~3 Seconds / Reset	
Vibrating frequency.	350~370Hz	
Selectable Fail-safe	Hi. / Lo.	
Selectable sensitivity	Hi. / Lo.	

# SC14 STANDARD TYPE / SC17 EX-PROOF TYPE

## DESCRIPTION OF FEATURES

### FORK TRIGGER POINT



SC14/SC17 fork trigger point is shown as below figure.  
The testing medium is water(S.G.=1 g/cm<sup>3</sup>).  
and its trigger point is about 23mm from the fork tip.  
If testing medium with S.G (specific gravity) lower than 1g/cm<sup>3</sup> (water), the trigger point would increase.  
Similarly, the trigger point will downward while the S.G is large than water.

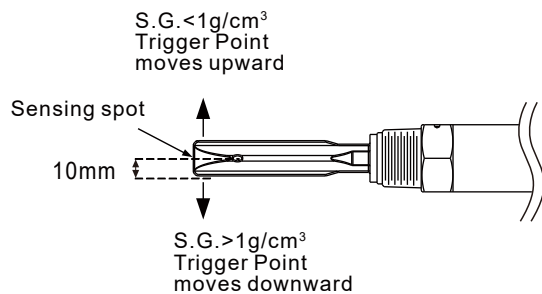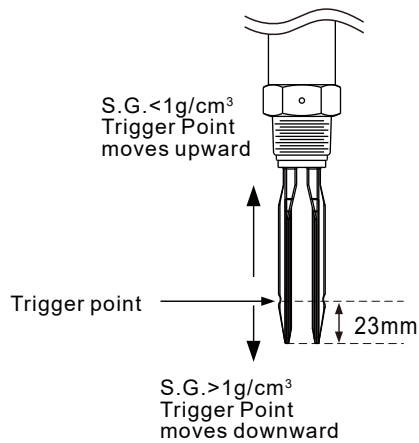




# SC14 STANDARD TYPE / SC17 EX-PROOF TYPE WIRING INSTRUCTIONS

SC14XX, SC174X




Relay output type(SPDT)      SSR(MOSFET) output type



Relay output type (DPDT)

SSR(MOSFET) output type



## FUNCTIONAL DESCRIPTION

### Description of terminal functions

- L+, N-: Power Supply
- NC, COM, NO: Relay Output
- RT1, RT2: Remote-Test
- $\perp$  : Ground Connection
- COM1, NO1 : SS R(MOSFET) Output
- COM2, NO2 : The second set of SSR (MOSFET) output (Optional)

## DESCRIPTION OF PANEL FUNCTIONS

- PWR: Power Supply (Green Light)
- SIGNAL: Output Indication (Red Light)
- FSH: Power On. The signal lamp is on and the relay is conductive. While the tuning fork switch senses the material, the signal lamp is off and relay is not conductive.
- FSL: Power On. The signal lamp is off and the relay is not conductive. While the tuning fork switch senses the material, the signal lamp is on and relay is conductive.
- SENSITIVITY L: Low Sensitivity
- SENSITIVITY H: High Sensitivity

## FAIL-SAFE HIGH / LOW PROTECTION

### FSH (Fail-Safe High) Protection:

Switch to FSH mode.

**Normal Status:** The signal lamp is on. It indicates that the tuning fork switch does not sense the material and the relay is conductive.

**Failure:** When the power shuts down, the signal lamp is off. It indicates that the tuning fork switch is voided and the relay is not conductive.

### FSL (Fail-Safe Low) Protection:

Switch to FSL mode.

**Normal Status:** The signal lamp is on.

The tuning fork switch senses the material and the relay is conductive.

**Failure:** When the power shuts down, the signal lamp is off. The tuning fork switch is voided and the relay is not conductive.

## SENSITIVITY ADJUSTMENT

The SENSITIVITY is located on the right side of the panel. Minor adjustment can be made by rotating the sensitivity up to 22 turns using a small screw driver. Rotating clockwise will increase sensitivity; rotating counter-clockwise will decrease sensitivity.

The sensitivity is originally set at max. value. The switching point is at 15mm from the tip of the tuning fork. The switching point position will be changed by the sensitivity value. If the sensitivity adjusts to lower value, the switching point position is moving backward; if the sensitivity adjusts to high value, the switching point position is moving forward. User may change the switching point position by adjusting the sensitivity. The changing range of switching point is about 60mm. For example, if the switching point needs to be moved backward by 30mm, the user needs to adjust SENSITIVITY counter-clockwise by 10 turns. In general cases, there is no need for sensitivity adjustment.

	FSL		FSH	
Level				
Contact form	NO COM NC	NO COM NC	NO COM NC	NO COM NC
Indication	○	●	●	○
Status	Fail	Normal	Normal	Fail

# SC14 STANDARD TYPE / SC17 EX-PROOF TYPE MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC1400	SCX10000-AAB
SC1410	SCX10000-CAB
SC1420	SCX10000-BAB
SC1740	SCX1001C-AAB
SC1741	SCX1001C-CAB

## ACCESSORIES


### Cable Conduit - Ex d IIC

Material: Washer — NBR


Body— Copper alloy(3/4"NPT)

Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)



HP415-A23000MG01(29-1108)





SC14 STANDARD TYPE / SC17 EX-PROOF TYPE  
ORDER INFORMATION

0506070809

121314151617181920212223242526

SCX1-AB

1920

Probe material

MA: SUS304  
MB: SUS316  
MC: SUS316L

2122

Coating material

00: None  
14: PFA  
34: ECTFE

23242526

Probe length

Code	Probe length
0130~3000	130~3000mm
0105~0250	105~250mm

※Coating length max. 400mm

10

# SC24 LITE-TYPE

Dimensions (Unit:mm)			
Model no.	SC24□□□ DIN Connector	SC24□□□ M12 Connector	SC24□□□ Cable Wire Type
Supply voltage & output	SC240□□: 20~250Vac / Vdc 2 Wire Contactless electronic switch. SC24P□□: 12~55Vdc 3 Wire PNP output. SC24N□□: 12~55Vdc 3 Wire NPN output. SC24K: (SIO mode)12~55Vdc 3wire PNP output; (IO-Link mode)18~30Vdc 3wire PNP output.*1		
Fork length	100mm		
Ambient temp.	-40~85°C		
Ambient humidity	80% RH non-condensed		
Process temp.	SC24□□□T: -40~+150°C SC24□□□: -40~+100°C		
Process pressure	Maximum 40 bar		
Min. material density sensed	Solid:density: $\geq 0.07\text{g/cm}^3$ Liquid:density: $\geq 0.7\text{g/cm}^3$ Viscosity:1~10000 cSt		
Magnetic testing	Output function test performed by putting magnets near the indicated spot		
Vibrating frequency	350~370Hz		
Status indication	Green light:indicate power supply Red light:indicate operating mode		
Housing material	SUS304		
Probe material	SUS304, SUS316, SUS316L		
IP protection	IP65	IP67	IP67
Mounting	1" more		
Conduit	Valve plug DIN 43650	M12 Connector(180° / 90°)	Cable connector

Note 1: IO-Link only has M12 connector ,present as PNP output.

## SC24 LITE-TYPE DESCRIPTION OF FEATURES


### FORK TRIGGER POINT

SC24 fork trigger point is shown as below figure.

The testing medium is water(S.G.=1 g/cm<sup>3</sup>) and its trigger point is about 23mm from the fork tip.


If testing medium with S.G (specific gravity) lower than 1g/cm<sup>3</sup> (water), the trigger point would increase.

Similarly, the trigger point will downward while the S.G is large than water.

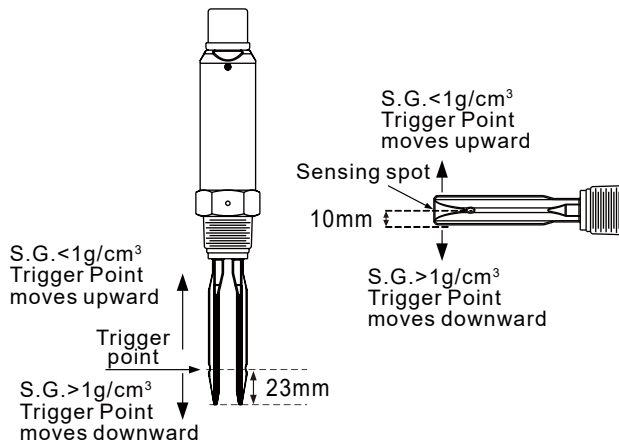

### MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.

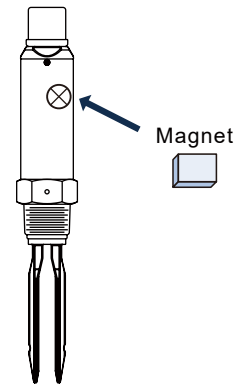

# SC24 LITE-TYPE DESCRIPTION OF FEATURES

## OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED					

It represents Blinking

## OUTPUT STATUS FOR PNP / NPN TRANSISTOR

### DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

### M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking



# SC24 LITE-TYPE WIRING INSTRUCTIONS

## SC240X(TWO WIRES) WIRING



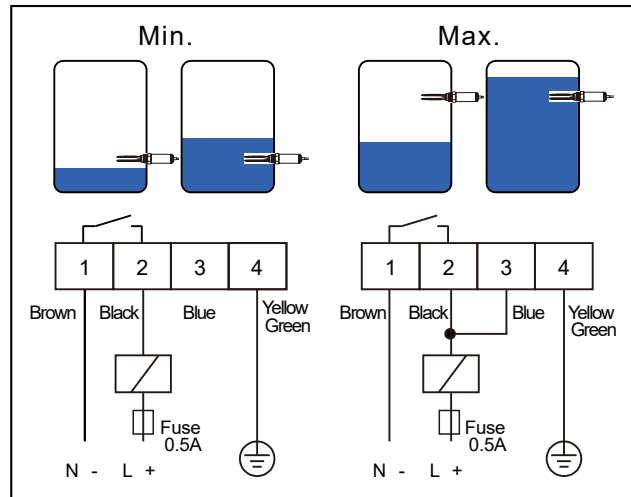


Figure 1 Two Wires Wiring

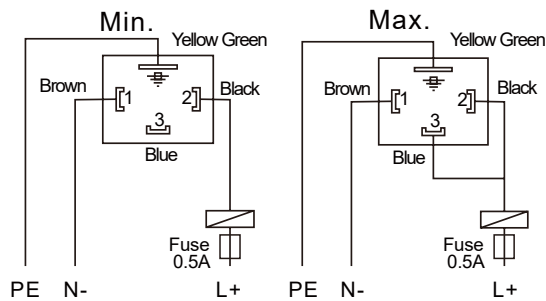

DIN Wiring Diagram

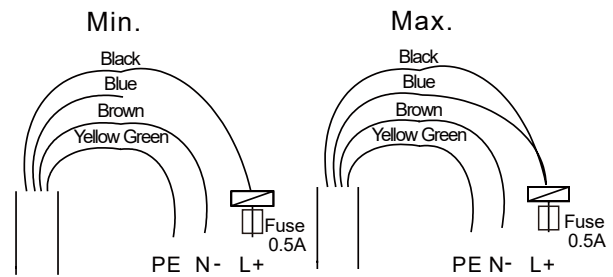

M12x4Pin Cable Wiring Diagram

### WIRING

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

#### ■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay.  
Pin 4 (Yellow Green) connects to tank ground.


#### ■ High (Max.) mode:

Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay .  
Pin 4 White (Yellow Green) connects to tank ground.

# SC24 LITE-TYPE WIRING INSTRUCTIONS

## SC24P/N(THREE WIRES) WIRING

DIN Cable Wiring Diagram

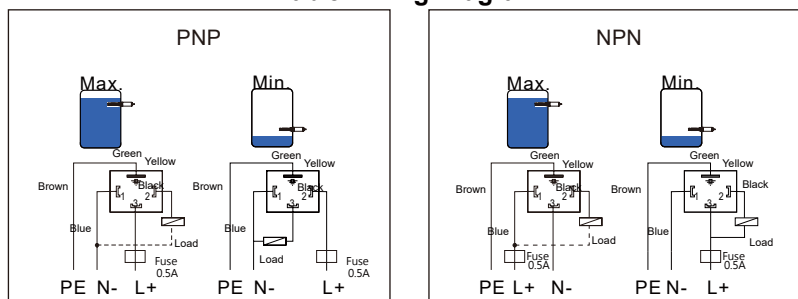

M12x4Pin Wiring Diagram

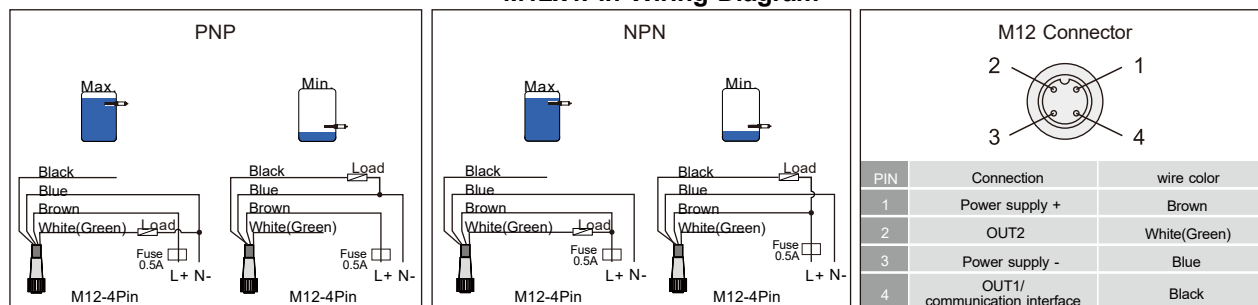


Figure 2 PNP / NPN Output Wiring Diagram

### WIRING

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

#### ►DIN & Cable Wiring

##### PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact to tank ground.

#### ►M12 x 4Pin Wiring:

##### PNP Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

##### NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

**SC24 LITE-TYPE**  
**MODEL NUMBER / ORDER CODE COMPARISON TABLE**

Model Number	Order Code
SC2400	SCX2□□00-□BA
SC240□□T	SCX20200-□BA
SC24P□	SCX2□□00-□BP
SC24N□	SCX2□□00-□BN

# SC24 LITE-TYPE ORDER INFORMATION

SCX2		05	06	00	00	-	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24				
<b>Model</b>																										
00: Standard      02: Hi-temperature																										
<b>Construction</b>																										
A: Standard      B: Extension type																										
<b>Fork length</b>																										
B: 100mm																										
<b>Power supply</b>																										
A: 20~250Vac/Vdc, 50/60Hz; 2 wire Contactless electronic switch P: 12~55Vdc ; 3 Wire PNP output. N: 12~55Vdc ; 3 Wire NPN output. K: IO-Link ; 3 wire PNP output.																										
<b>Connection</b>																										
<div> <div> <div>12 13</div> <div>Flange</div> <div>AK: JIS-FF</div> <div>AN: ANSI-RF</div> <div>AS: DIN-FF</div> <div>AI: 3A</div> <div>Thread</div> <div>AA: JIS</div> <div>AC: ANSI</div> </div> <div> <div>14 15</div> <div>A8: 1"</div> <div>A9: 1-1/4"</div> <div>B1: 1-1/2"</div> <div>B2: 2"</div> <div>B4: 2-1/2"</div> <div>B5: 3"</div> <div>B7: 4"</div> <div>D8: DN25</div> <div>E1: DN40</div> </div> <div> <div>16 17</div> <div>01: PT male</div> <div>03: PF male</div> <div>07: NPT male</div> <div>40: 5 kg/cm<sup>2</sup></div> <div>42: 10 kg/cm<sup>2</sup></div> <div>48: 150 Lbs</div> <div>49: 300 Lbs</div> <div>57: PN10</div> <div>58: PN16</div> </div> </div>																										
<b>Probe material</b>																										
MA: SUS304 MB: SUS316 MC: SUS316L																										
<b>Connection</b>																										
A: M12x1(180°)      C: Cable B: M12x1(90°)      D: DIN 43650																										
※M12x1 with Cable, standard cable length 2M, PVC 24AWG ※Only option A,B can be selected for IO-Link version.																										
<b>Probe length</b>																										
<table border="1"> <thead> <tr> <th>Code</th> <th>Probe length</th> </tr> </thead> <tbody> <tr> <td>0130~0250</td> <td>130~250mm</td> </tr> </tbody> </table>		Code	Probe length	0130~0250	130~250mm																					
Code	Probe length																									
0130~0250	130~250mm																									

# SC35 TUNING FORK LEVEL SWITCH



NEPSI Ex ta IIIC T95BC ...T136BC Da  
Ex tb IIIC T80BC ...T290BC Db  
IECEX Ex ta IIIC T95BC / T130BC / T136BC Da  
Ex tb IIIC T80BC / T95BC / T130BC / T160BC / T240BC / T290BC Db

Dimensions (Unit:mm)			
Model No.	SC350 Standard Type	SC351 Extension Type	SC352 Cable Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67		
Probe material	SUS 304 / 316 / 316L		
Power supply	19 ~253 Vdc / Vac, 50/60 Hz ; NPN / PNP(10~55Vdc)		
Probe construction	Max. 1.5 W		
Voltage endurance capability	3.7 kV		
Overvoltage protection	overvoltage category II		
Ambient temp.	-40~85 °C		-40~75 °C
Process temp.	-40~150 °C	-40~150 °C	-40~80 °C
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$		
Measuring frequency	140 Hz $\pm$ 5 Hz		
Material dimension	Max.10 mm		
Conduit	1/2" PF / 1/2" NPT(Ex-proof type only supports 1/2" NPT)		
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$		
Process pressure	Max.25 bar		Max. 2 bar
Output signal	2 sets of SPDT relay output / 2 sets of transistor output / 3 wires NPN/PNP transistor output		
Contact capacity	Relay: 6A / 250Vac · 6A / 28Vdc ; Transistor: 400mA · 60Vac / Vdc NPN / PNP / Transistor: 350mA · 55Vdc		


# SC35 TUNING FORK LEVEL SWITCH

NEPSI Ex ta IIIC T95BC ...T136BC Da  
Ex tb IIIC T80BC ...T290BC Db  
IECEX Ex ta IIIC T95BC / T130BC / T136BC Da  
Ex tb IIIC T80BC / T95BC / T130BC / T160BC / T240BC / T290BC Db

Dimensions (Unit:mm)		
Model No.	SC350 High-temp. Type	SC351 High-temp. Extension Type
Level sensor housing	Built-in box, aluminum coating IP66/IP67	
Probe material	SUS 304 / 316 / 316L	
Power supply	19 ~253 Vdc / Vac, 50/60 Hz	
Probe construction	Max. 1.5 W	
Voltage endurance capability	3.7 kV	
Overvoltage protection	overvoltage category II	
Ambient temp.	-40~85 °C	
Process temp.	-40~280 °C	
Material density	$\geq 0.01 \text{ g/cm}^3$ or $\geq 0.05 \text{ g/cm}^3$	
Measuring frequency	140 Hz $\pm$ 5 Hz	
Material dimension	Max.10 mm	
Conduit	1/2" PF / 1/2" NPT(Ex-proof type only supports 1/2" NPT)	
External diameter of conduit cable	$\phi 6 \sim \phi 10 \text{ mm}$	
Process pressure	Max. 25 bar	
Output signal	2 sets of SPDT relay output / 2 sets of transistor output	
Contact capacity	Relay: 6A / 250Vac · 6A / 28Vdc Transistor: 400mA · 60Vac / Vdc	

# SC35 TUNING FORK LEVEL SWITCH DESCRIPTION OF FEATURES

## PANEL INTRODUCTION

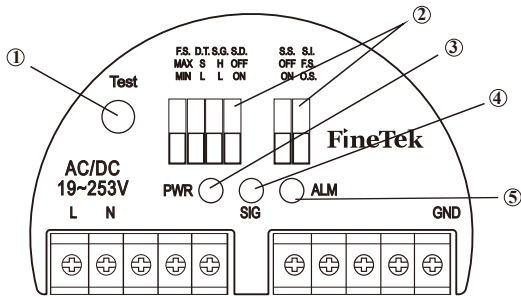


- ①: Test button
- ②: Function adjustment button
- ③: Power indicator
- ④: Status indicator
- ⑤: Alarm indicator



Abbreviation	Function	Option description	Remarks
Test	Test button	Reverse output signal	Reverse output signal can be used to provide a method for testing control equipment which is connected to sensor output
F.S.	Fail-Safe	MAX: High MIN: Low	Includes high low fail-safe mode
D.T.	Delay Time	S: General setting L: Delay of 5 seconds	Material covered: 0.5s Material not covered: 150°C: £1.5s 230°C / 280°C: £2s L sets delay of 5s for covered/uncovered
S.G.	Specific Gravity	H: $\square 0.05 \text{ g/cm}^3$ L: $\square 0.01 \text{ g/cm}^3$	High Density $>0.05 \text{ g/cm}^3$ Low Density $>0.01 \text{ g/cm}^3$
S.D.	Self Diagnosis	OFF: Disabled ON: Enabled	ON setting allows the sensor to detect fork abrasion or material build-up; SIG LED will flash if trouble exists
S.S.	Super Switch	OFF: Disabled ON: Enabled	When set ON Output 2 will be dedicated to indicate self-diagnostics alarm exists
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output status mode	F.S. (fail safe) selected = Normal / Alarm status; O.S. (relay output status) selected = Relay energized (on) or de-energized (off)

## SEDIMENT DETECTION

- It is only used to detect the sediment under the water, but can't be used for the level detection of the liquid or the doped liquid.
- S.G. (Specific Gravity) shall be adjusted to H position.
- S.D. (Self Diagnosis) shall be switched to OFF position.
- SC352 cable type is inapplicable to this working environment

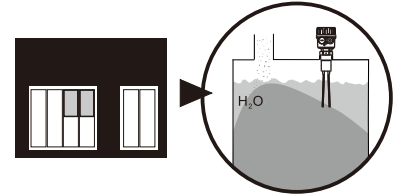

## ENVIRONMENT/PROCESS TEMPERATURE LIMITATION

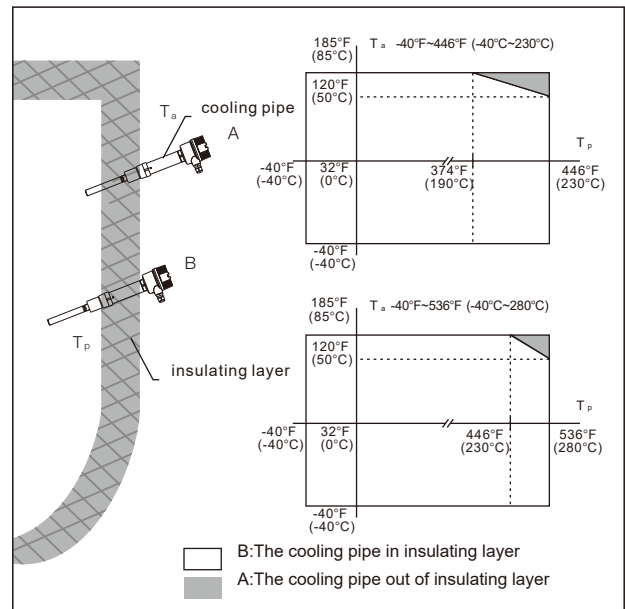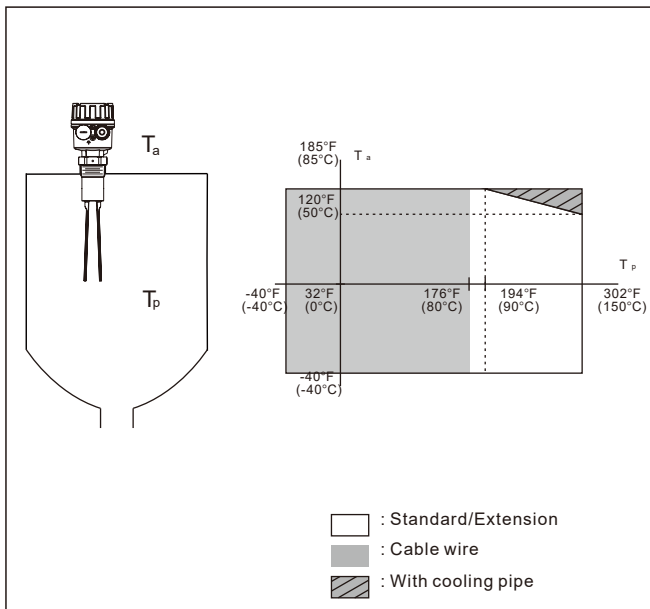


- ※ ETFE coating:  $T_p \text{ max.} = 150^\circ\text{C}$
- ※ PTFE coating:  $T_p \text{ max.} = 230^\circ\text{C}$



# SC35 TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS


Wiring configuration  
Diagram and introduction  
Of features  
Dual-relay output

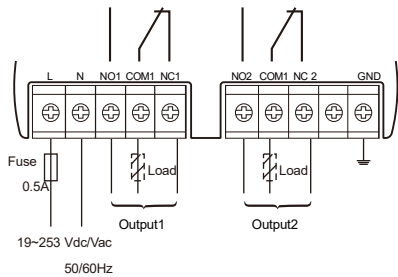

Load: External load  
U ~ max. 250Vac@I<sub>L</sub> ~ max. 6A  
U = max. 28Vdc@I<sub>L</sub> = max. 6A

Failure mode	Material level	Output signal			LED indicators		
		output1	output2		Power	Status	Alarm
			S.S. OFF	S.S. ON	Green	Yellow	Red
MAX						O.S.	
						O.S.	
MIN						O.S.	
						O.S.	
Viscous material		Maintain the previous state				O.S.	
Wear of tuning fork							

Dual-transistor output

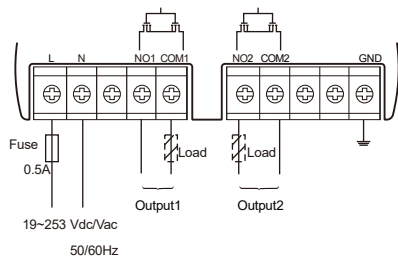

Load: External load  
U ~ max. 60Vac@I<sub>L</sub> ~ max. 400mA  
U = max. 60Vdc@I<sub>L</sub> = max. 400mA  
※External load R must be connected

Failure mode	Material level	Output signal			LED indicators		
		output1	output2		Power	Status	Alarm
			S.S. OFF	S.S. ON	Green	Yellow	Red
MAX						O.S.	
						O.S.	
MIN						O.S.	
						O.S.	
Viscous material		Maintain the previous state				O.S.	
Wear of tuning fork							
Output1>400mA			Maintain the previous state				
Output2>400mA		Maintain the previous state					
Output1& Output2>400mA							

※ When output is off, there will be no error current status

:ON :Flash :OFF

I :Relay ON I :Relay OFF I L :Load current

# SC35 TUNING FORK LEVEL SWITCH

## MODEL NUMBER / ORDER CODE COMPARISON TABLE


Model Number	Order Code
SC350	SCX3□□□□-EC(HC,JC)
SC351	SCX3□□□□-FC(IC,KC)
SC352	SCX3□□□□-DC

### ACCESSORIES


#### Cable Conduit - Ex d IIC

Material: Washer — NBR  
 Body— Copper alloy(3/4"NPT)  
           Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)



HP415-A23000MG01(29-1108)



# SC35 TUNING FORK LEVEL SWITCH

## ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28
SCX3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
05 06 Model																								
00: Standard (Construction: A, B, D)																								
02: High temperature (Construction: E, F)																								
08: High temperature (Construction: H, I)																								
09: High temperature type 2 (Construction: J, K)																								
07 08 Certification																								
01: None; 1/2" PF																								
02: None; 1/2" NPT																								
03: None; M20x1.5																								
2D: IECEEx-Ex t; 1/2"NPT																								
5D: TS-Ex t; 1/2" NPT																								
7D: NEPSI-Ex d; 1/2" NPT																								
09 Construction																								
A: Standard (150°C @ 50°C)																								
B: Extension type (150°C @ 50°C)																								
D: Cable type (80°C)																								
E: High temperature general type (150°C @ 85°C)																								
F: High temperature extension type (150°C @ 85°C)																								
H: High temperature type (230°C)																								
I: High temperature extension type (230°C)																								
J: High temperature type 2 (280°C)																								
K: High temperature extension type 2 (280°C)																								
10 Fork length																								
C: 155mm																								
11 Housing																								
F: Aluminum																								
R: Stainless steel (No explosion protection)																								
12 Housing cover																								
A: No Lens																								
B: Lens(Only stainless steel)																								

(Next page)

# SCX3

**⑬ Power supply** \_\_\_\_\_

A: 19~253Vac/Vdc, 50/60Hz; Two relay output  
B: 19~253Vac/Vdc, 50/60Hz; Two transistor output  
C: 10~55Vdc; 3 wire PNP/NPN output

**Connection** \_\_\_\_\_

01: PT male  
03: PF male  
07: NPT male  
40: 5 kg/cm<sup>2</sup>  
42: 10 kg/cm<sup>2</sup>  
48: 150 Lbs  
49: 300 Lbs  
57: PN10  
58: PN16

②① Probe material \_\_\_\_\_

MA: SUS304  
MB: SUS316  
MC: SUS316L

②③ Coating material \_\_\_\_\_

※Coating length max. 400mm

②④ Surface roughness \_\_\_\_\_

A:  $Ra \leq 3.2 \mu m$

**Probe length** \_\_\_\_\_

Code	Probe length
0225~4000	225~4000mm
0750~A200	750~20000mm

# SC28 MINI-TYPE

Dimensions (Unit:mm)	<p>Standard Type</p>	<p>Extension Type</p>	<p>Ultra Extension Type</p>	<p>Side View</p>
Model no.	SC28□□□ DIN Connector			
Supply voltage & output	SC280□: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55Vdc 3wire PNP output; SC28N□□: 12~55Vdc 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP65			
Mounting	3/4"more			
Conduit	Valve plug DIN 43650			

# SC28 MINI-TYPE

Dimensions (Unit:mm)	<p>Standard Type</p>	<p>Extension Type</p>	<p>Ultra Extension Type</p>	<p>Side View</p>
Model no.	SC28□□□ M12 Connector			
Supply voltage & output	SC280□: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P□□: 12~55Vdc 3wire PNP output; SC28N□□: 12~55Vdc 3wire NPN output. SC28K: (SIO mode) 12~55Vdc 3wire PNP output; (IO-Link mode) 18~30Vdc 3wire PNP output.*1			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28□□□: -40°C~100°C SC28□□□T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4"more			
Conduit	M12 Connector(180° / 90°)			

Note 1: IO-Link only has M12 connector, present as PNP output.

## SC28 MINI-TYPE

Dimensions (Unit:mm)	<p>Standard Type</p>	<p>Extension Type</p>	<p>Ultra Extension Type</p>	<p>Side View</p>
Model no.	SC28999 Cable Wire Type			
Supply voltage & output	SC2809: 20~250 Vac / Vdc, 50/60Hz 2 wire Contactless electronic switch. SC28P99: 12~55Vdc 3wire PNP output; SC28N99: 12~55Vdc 3wire NPN output.			
Fork length	40mm			
Ambient temp.	-40°C~80°C			
Process temp.	SC28999: -40°C~100°C SC28999T: -40°C~150°C			
Ambient humidity	80% RH non-condensed			
Process pressure	-1~600PSI (40bar)			
Min. material density sensed	Liquid: density: $\geq 0.7\text{g/cm}^3$ Viscosity: 1~10000 cSt			
Magnetic testing	Output function test performed by putting magnets near the indicated spot			
Vibrating frequency	1K Hz $\pm$ 10%			
Status indication	Green light: indicate power supply Red light: indicate operating mode			
Housing material	SUS304			
Probe material	SUS304, SUS316, SUS316L			
IP protection	IP67			
Mounting	3/4"more			
Conduit	Cable connector			




## SC28 MINI-TYPE DESCRIPTION OF FEATURES

---

### MAGNETIC TEST

After the switch is installed and powered, magnetic test function can be performed accordingly. The testing point is marked on the housing label. User holds the magnet and moves it close to testing point, the output status will switch from NO. to NC. or NC to NO. and red LED would switch ON or OFF while fork continues to vibrate. When magnet is pulled away from the testing point, the output status and red LED would return as default while fork continues to vibrate. The purpose of testing is to confirm the wiring and functioning are correct.



# SC28 MINI-TYPE DESCRIPTION OF FEATURES

## OUTPUT STATUS FOR RELAY

- Low (Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Relay is on NO status and red LED indication is off. When tuning fork is covered by testing medium, the vibration will stop and relay becomes NC status. Red LED indication then is on.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while the power on. Relay is on NC status and red LED indication is on. When tuning fork covered by testing medium, the vibration stops and relay becomes NO status. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
Contactless electronic switch	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED					

It represents Blinking

## OUTPUT STATUS FOR PNP / NPN TRANSISTOR

### DIN & Cable type

- Low(Min.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NO status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NC status. Red LED indication is off.
- High(Max.) Mode: Tuning fork switch will be active after 3 seconds while power on. Output transistor is on NC status and red LED indication is on. When tuning fork covered by testing medium,vibration will stop and output transistor becomes NO status. Red LED indication is off.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

### M12 x 4Pin type

- Low(Min.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NO and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NC. Red LED indication is on.
- High(Max.) Mode: Tuning fork switch will be actuated 3 seconds after the power is on. Relay is NC and red LED indication is off. When tuning fork is covered by testing medium, vibration stops and relay becomes NO. Red LED indication is on.
- Flashing red indicates abnormal: Possible causes overloads or short-circuit load back, equipment malfunction or wear tuning fork probe.

	Min. Mode		Max.Mode		
Level					Instrument failure
PNP/NPN Output	Switch open	Switch closed	Switch closed	Switch open	Switch open
Red LED (DIN& Cable)					
Red LED (M12x 4Pin)					

It represents Blinking

# SC28 MINI-TYPE WIRING INSTRUCTIONS

## SC280(TWO WIRES) WIRING



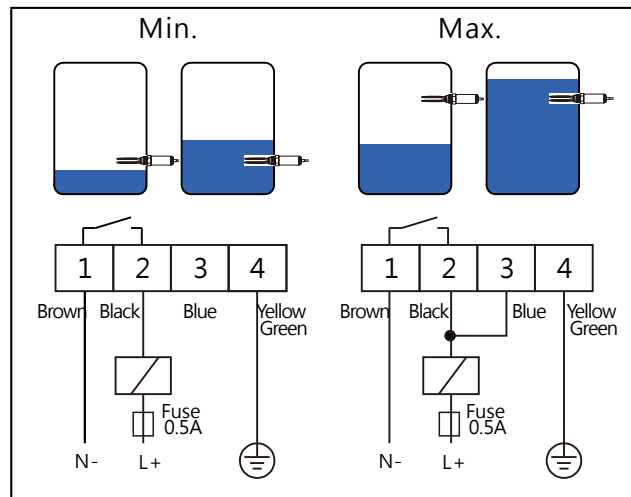


Figure 1 Two Wires Wiring

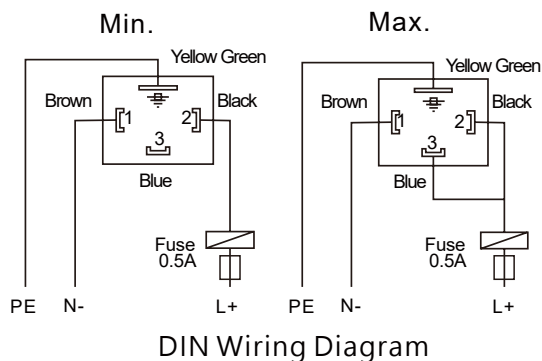

DIN Wiring Diagram

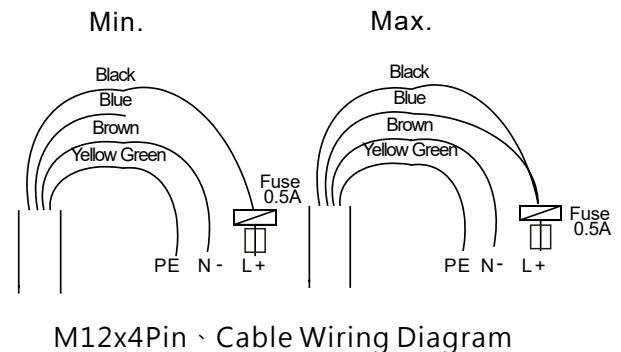

M12x4Pin Cable Wiring Diagram

### Wiring

Power can be AC/DC switching. Two wires are connected with terminals (L+/N-) as in Figure 1.

#### ■ Low (Min.) mode:

Pin 1 (Brown) is connected to N-. Pin 2 (Black) is connected to L+ with relay.  
Pin 4 (Yellow Green) connects to tank ground.


#### ■ High (Max.) mode:

Pin 1 (Brown) is connected to N-. Pin 3 is connected to pin 2 (Black) to L+ with Relay .  
Pin 4 (Yellow Green) connects to tank ground.

# SC28 MINI-TYPE WIRING INSTRUCTIONS

## SC28P/N (THREE WIRES) WIRING

DIN Cable Wiring Diagram

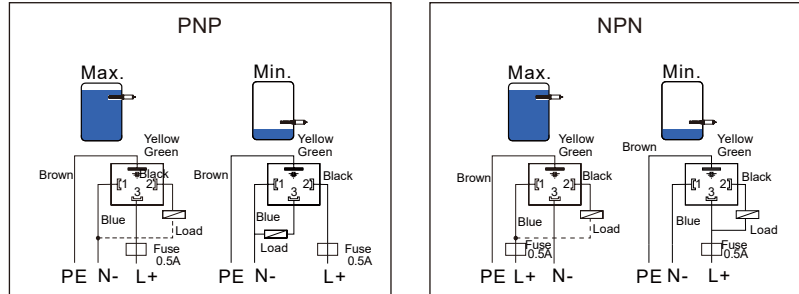

M12x4Pin Wiring Diagram

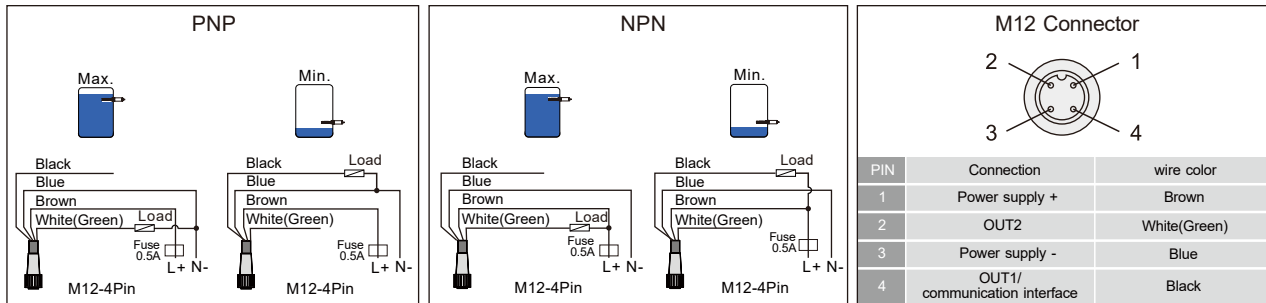


Figure 2 PNP / NPN Output Wiring Diagram

### Wiring

Power supply is for DC only. Output is PNP / NPN and high / low level alarm. Please see Figure 2.

#### ► DIN & Cable Wiring

##### PNP Output

- High (Max.) Mode: Pin 1(Brown) connects to N-. Pin 3 (Blue) connects to L+. To output, it is pin 2. (Black) connects to N- with relay. Pin 4 (Yellow Green) connects to tank ground.
- Low (Min.) Mode: Pin 1 (Brown) connects to N-. Pin 2 (Black) connects to L+. To output, Pin 3 (Blue) connects to N- with relay. Pin 4 (Yellow Green) should contact to tank ground.

##### NPN Output

- High (Max.) Mode: Pin 1 (Brown) connects to L+. Pin 3 (Blue) connects to N-. To output, Pin 2 (Black) connects to L+ with relay. Pin 4(Yellow Green) should contact to tank ground.
- Low(Min.)Mode: Pin1 (Brown) connects to N-. Pin 3 (Blue) connects to L+. To output Pin 2 (Black) connects to L+ with relay. Pin 4 (Yellow Green) should contact To tank ground.

#### ► M12 x 4Pin Wiring:

##### PNP Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to N-.
- Low(Min.) Mode: number 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to N-.

##### NPN Output

- High(Max.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 2 pin White(Green), then connected to L+.
- Low(Min.) Mode: No. 1 pin(Brown) is connected to L+. No.3 pin(Blue) is connected to N-. Output is connected to No. 4 pin(Black), then connected to L+.

**SC28 MINI-TYPE**  
**MODEL NUMBER / ORDER CODE COMPARISON TABLE**

Model Number	Order Code
SC28099	SCX50000-9AC9T
SC28P99	SCX50000-9AC9P
SC28N99	SCX50000-9AC9N
SC28099T	SCX50200-9AC9T
SC28P99T	SCX50200-9AC9P
SC28N99T	SCX50200-9AC9N

# SC28 MINI-TYPE ORDER INFORMATION

SCX 5

05

06

07

08

09

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

05 06

Model

00: Standard

02: High temperature

07 08

Certification

00: None

09

Construction

A: Standard

B: Extension type

C: Ultra extension type

E: High temperature general type

F: High temperature extension type

G: High temperature ultra extension type

10

Fork length

A: 40mm

11

Housing

C: Compact

12

Housing cover

C: Cable

D: DIN43650

M: M12x1(180°)

N: M12x1(90°)

※M12x1 with cable, standard cable length 2M, PVC 24AWG

※Only option M,N can be selected for IO-Link version.

13

Power supply

T: 20~250Vac/Vdc, 50/60Hz; 2 wire contactless electronic switch

P: 12~55Vdc; 3 wire PNP output

N: 12~55Vdc; 3 wire NPN output

K: IO-Link; 3 wire PNP output.

(Next page)

# SC28 MINI-TYPE ORDER INFORMATION

SCX 5 050607080910111213141516171819202122232425262728

## Connection

⑭ ⑮

AA: JIS  
AB: ISO  
AC: ANSI/ASTM  
AD: DIN  
AG: IDF  
AI: 3A  
AJ: JIS-RF  
AK: JIS-FF  
AN: ANSI-RF  
AO: ANSI-FF  
AR: DIN-RF  
AS: DIN-FF

⑯ ⑰

A7: 3/4"  
A8: 1"  
A9: 1-1/4"  
B1: 1-1/2"  
B2: 2"  
B3: 2-1/4"  
B4: 2-1/2"  
B5: 3"  
B6: 3-1/2"  
B7: 4"  
B8: 5"  
B9: 6"  
D7: DN20  
D8: DN25  
D9: DN32  
E1: DN40  
E2: DN50  
E3: DN65  
E4: DN80

⑱ ⑲

00: None  
01: PT male  
03: PF male  
05: BSP male  
07: NPT male  
40: 5kg/cm2  
42: 10kg/cm2  
48: 150Lbs  
49: 300Lbs  
51: 600Lbs  
57: PN 10  
58: PN 16  
59: PN 25  
60: PN 40  
62: PN 0.6 Mpa  
63: PN 1.0 Mpa  
64: PN 1.6 Mpa  
65: PN 2.5 Mpa  
66: PN 4.0 Mpa

## ⑳ ㉑ Probe material

MA: SUS304  
MB: SUS316  
MC: SUS316L

## ㉒ ㉓ Coating material

00: None

## ㉔ Surface roughness

B: Ra≤1.5um  
C: Ra≤0.8um

## ㉕ ㉖ ㉗ ㉘ Probe length

Code	Probe length	Remarks
0054	54mm	Compact-hidden plate type
0076	76mm	Compact-thread type
0098	98mm	Compact-hidden extension type
0120	120mm	Compact-thread extension type
0099~0250	99~250mm	Compact-hidden plate lengthened type
0121~0250	121~250mm	Compact-thread lengthened type




# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)			
	<b>SC380 Standard Type</b>		
	<b>SC381 Extension Type</b>		
	<b>SC382 Ultra Extension Type</b>		

Output type	 8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc	19~253Vac / 2dc,50 / 260Hz
Power consumption	< 600mW	< 830mW	Max. 1.3W
Input protection	Reversed power supply protection function		NA
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~85 °C (Intrinsically safe type -40~70 °C)	-40~85 °C(Refernce operation manual)	
Process temp.	-40~150 °C		
Applicable density liquid	≥0.5 g/cm³ or ≥0.7 g/cm³		
Liquid viscosity	Max.10000mm² / S(10000cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.40 bar		
Output signal	Intrinsically safe signal 8 / 216mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output
Contact capacity	NA	350mA · 55Vdc	6A / 250Vac · 6A / 28Vdc
Protection level	IP66/67		
Probe material	SUS 304 / 2316 / 316L		
Intrinsically safe parameters	Ui(V)=36V · li=100mA,Pi=1W Ci(nF)=0 · Li(uH)=0※	NA	NA


※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another DM/brochure for TXX safety barrier.

# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH



NEPSI Ex ia IIC T3~T6 Ga

Dimensions (Unit:mm)			
	SC380 High-temp. Type	SC381 High-temp. Extension Type	SC382 High-temp. Ultra Extension Type

Output type	 8/16mA output type	3 Wires (NPN/PNP) output type	Dual-relay output type
Working voltage	11 ~36 Vdc	10 ~55 Vdc	19~253Vac/dc,50/60Hz
Power consumption	< 600mW	< 830mW	Max. 1.3W
Input protection	Reversed power supply protection function		NA
Overvoltage protection	overvoltage category III		
Measuring error	Max.±1mm		
Repeatability	0.5mm		
Hysteresis band	Approx.2mm		
Ambient temp.	-40~85 °C(Refernce operation manual)		
Process temp.	-40~150 °C		
Applicable density liquid	≥0.5 g/cm <sup>3</sup> or ≥0.7 g/cm <sup>3</sup>		
Liquid viscosity	Max.10000mm <sup>2</sup> / S(10000cSt)		
Granule size contained in the liquid	Max.φ5 mm		
External diameter of conduit cable	φ6~φ10 mm		
Process pressure	Max.40 bar		
Output signal	Intrinsically safe signal 8/16mA	Transistor output (NPN/PNP)	2 sets of SPDT relay output
Contact capacity	NA	350mA · 55Vdc	6A / 250Vac · 6A / 28Vdc
Protection level	IP66/67		
Probe material	SUS 304 / 316 / 316L		
Intrinsically safe parameters	Ui(V)=36V · li=100mA,Pi=1W Ci(nF)=0 · Li(uH)=0※	NA	NA

※ Must be equipped with intrinsic safety barrier to form a standard intrinsically safe system (Ex ia), please refer to another DM/brochure for TXX safety barrier.


# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

## DESCRIPTION OF FEATURES


### FORK TRIGGER POINT

The position of the SC38 fork trigger point depends on the mounting position as shown in the figure below: (When the testing medium is water, S.G.=1 g/cm<sup>3</sup>, distance of the trigger point is 13mm). If the testing medium has an S.G lower than 1g/cm<sup>3</sup>, the trigger point would rise. Similarly, the trigger point will move downward while the S.G is greater than water. The moving distance is subject to the S.G.

※ Operating point position: ◀




### ENVIRONMENT AND PROCESS TEMPERATURE LIMITATION

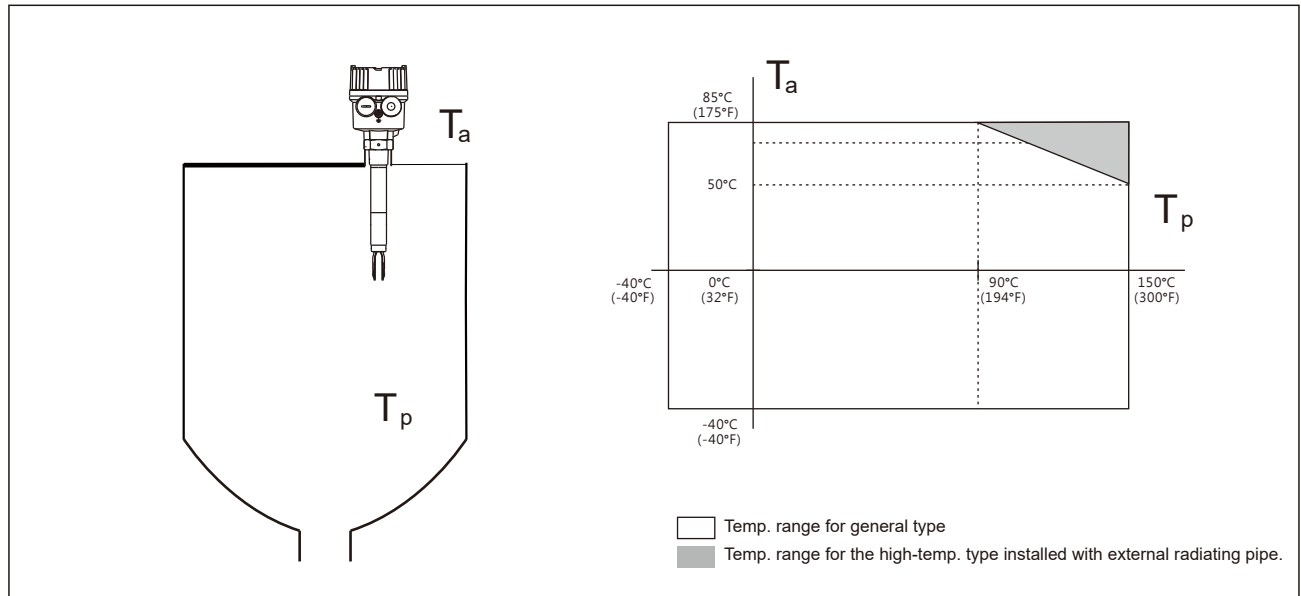

# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

## DESCRIPTION OF FEATURES

### PANEL INTRODUCTION

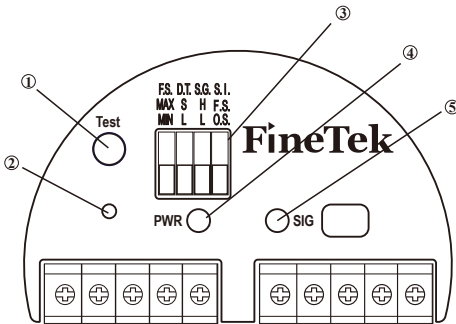

- ① :Test button
- ② :Operation point calibration button
- ③ :Function adjustment button
- ④ :Power indicator
- ⑤ :Status indicator


Abbreviation	Function	Option Description	Remarks
Test	Test button	Reverse the signal output	It is for the test after the installation is completed.
F.S.	Fail-Safe	MAX: High MIN: Low	It is for the high and low Fail-Safe mode.
D.T.	Delay Time	S: General setting L: Delay for 5 seconds	Covered by material: Approx. 0.5s Not covered by material: Approx. 1s Switch to L to set it at 5 seconds for either covered or not covered by material.
S.G.	Specific Gravity	H: $\square 0.7 \text{ g/cm}^3$ L: $\square 0.5 \text{ g/cm}^3$	The switch to set the material density.
S.I.	Signal Indication	F.S.: Fail-Safe mode O.S.: Output mode	Turn ON/OFF the yellow indicator based on the output status or the fail-safe status.

### DESCRIPTION OF THE TEST BUTTON

This button is mainly provided for the user to check whether the output operation works normally after the installation is completed. When the button is pressed, the output current ( $8\text{mA} \leftrightarrow 16\text{mA}$ ) and indicator (ON $\leftrightarrow$ OFF) will be reversed. Once the button is released, it will recover the original status.

### FUNCTION OF CUSTOMIZED OPERATION POINT POSITION

SC38 provides the function of customizing the operation point position according to what is required by the user.



### Settings

1. Keep pressing “Calibration Button” for 3 seconds. When the red and green LED indicators flash every 0.5 second, it enters the calibration mode. Press the calibration button again to enter the Empty Bin Calibration mode.

#### [Empty Bin Calibration]

2. Calibration status: The red LED indicator flashes every 0.5 second, and the output current switches to operate every 0.5 second ( $8 \leftrightarrow 16\text{mA}$ ).

3. This mode is to calibrate the vibration frequency of the tuning fork in the air. Press “Calibration Button” when the tuning fork doesn’t touch any material. The unit will record the vibration frequency in the air, and enter the operation point calibration mode.

#### [Operation Point Calibration]


1. Calibration status: The red LED indicator flashes every 0.25 second, and the output current switches to operate every 0.25 second ( $8 \leftrightarrow 16\text{mA}$ ).

2. Cover the material to the desired operating point position under this mode, and then press “Calibration Button”. It will be adjusted to the corresponding operating point position according to the H/L setting of the S.G.

# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH WIRING INSTRUCTIONS

## WIRING CONFIGURATION DIAGRAM AND INTRODUCTION OF FEATURES


### 8/16mA output

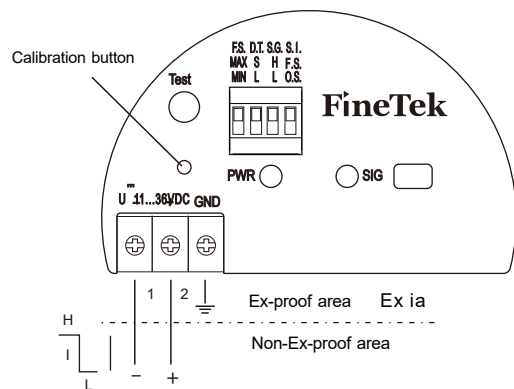

Failure mode	Material level	Output signal	LED indicators
MAX		+ 2 ~16mA 1	O.S.  F.S.
		+ 2 ~8mA 1	O.S.  F.S.
MIN		+ 2 ~16mA 1	O.S.  F.S.
		+ 2 ~8mA 1	O.S.  F.S.
Instrument failure		+ 2 <3.6mA 1	

~16mA=16mA K5% :ON :Flash :OFF  
~8mA=8mA K5%


### PNP/NPN Output

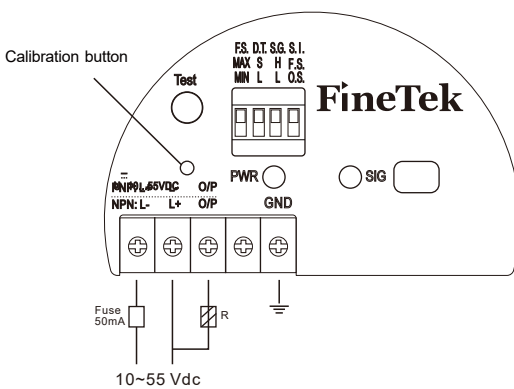

Failure mode	Material level	Output signal	LED indicators
MAX		IL	O.S.  F.S.
		<100μA	O.S.  F.S.
MIN		IL	O.S.  F.S.
		<100μA	O.S.  F.S.
Instrument failure		<100μA	
Over Load(I <sub>L</sub> >350mA)		<100μA	

IL : Load current :ON :Flash :OFF  
R : External load  
U = max. 55Vdc@I<sub>L</sub> = max. 350mA

### Dual Relay output

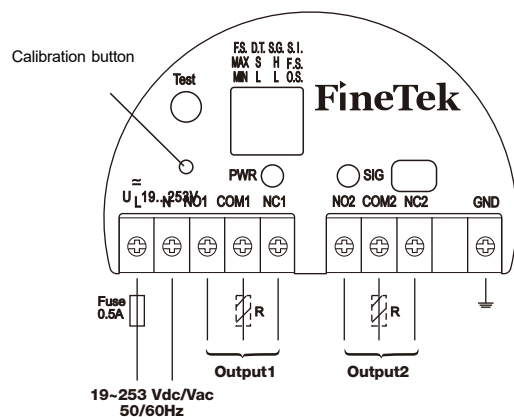

Failure mode	Material level	Output signal	LED indicators
MAX			O.S.  F.S.
			O.S.  F.S.
MIN			O.S.  F.S.
			O.S.  F.S.
Instrument failure			

R: External load  
U ~ max. 250Vac@I<sub>L</sub> ~ max. 6A  
U = max. 28Vdc@I<sub>L</sub> = max. 6A

# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH MODEL NUMBER / ORDER CODE COMPARISON TABLE

Model Number	Order Code
SC380C99990	SCX50099-AA
SC380F99990	
SC380G99990	
SC381C99991	SCX50099-BA
SC381F99991	
SC381G99991	
SC382C99992	SCX50099-CA
SC382F99992	
SC382G99992	
SC380C99993	SCX50299-EA
SC380F99993	
SC380G99993	
SC381C99994	SCX50299-FA
SC381F99994	
SC381G99994	
SC382C99995	SCX50299-GA
SC382F99995	
SC382G99995	


## ACCESSORIES

### Cable Conduit - Ex d IIC


Material: Washer — NBR

Body— Copper alloy(3/4"NPT)  
Nickel plated(1/2"NPT)

HP415-A23100MH01(29-1104)



HP415-A23000MG01(29-1108)



# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

## ORDER INFORMATION

	05	06	07	08	09	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28			
<b>SCX 5</b>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			
<b>05 06 Model</b>																											
00: Standard 02: High temperature																											
<b>07 08 Certification</b>																											
01: None, 1/2"PF 02: None, 1/2"NPT 7B: NEPSI-Ex ia, 1/2"NPT																											
<b>09 Construction</b>																											
A: Standard B: Extended type C: Ultra extension type E: High temperature general type F: High temperature extension type G: High temperature ultra extension type																											
<b>10 Fork length</b>																											
A: 40mm																											
<b>11 Housing</b>																											
F: Shared junction box(Aluminum box) R: Shared junction box(Stainless steel)																											
<b>12 Housing cover</b>																											
A: Without lens(Shared junction box) B: With lens(Shared junction box)(Only stainless steel)																											
<b>13 Power supply</b>																											
A: 19~253Vac/Vdc, 50/60Hz; Two relay output C: 10~55Vdc; 3 wire PNP/NPN output D: 11~36Vdc; 8/16mA output																											

(Next page)

# SC38 MULTI-FUNCTIONAL TUNING FORK LEVEL SWITCH

## ORDER INFORMATION

SCX 5

### Connection

⑭ ⑮

AA: JIS  
AB: ISO  
AC: ANSI/ASTM  
AD: DIN  
AG: IDF  
AI: 3A  
AJ: JIS-RF  
AK: JIS-FF  
AN: ANSI-RF  
AO: ANSI-FF  
AR: DIN-RF  
AS: DIN-FF

⑯ ⑰

A7: 3/4"  
A8: 1"  
A9: 1-1/4"  
B1: 1-1/2"  
B2: 2"  
B3: 2-1/4"  
B4: 2-1/2"  
B5: 3"  
B6: 3-1/2"  
B7: 4"  
B8: 5"  
B9: 6"  
D7: DN20  
D8: DN25  
D9: DN32  
E1: DN40  
E2: DN50  
E3: DN65  
E4: DN80

⑱ ⑲

00: None  
01: PT male  
03: PF male  
05: BSP male  
07: NPT male  
40: 5kg/cm<sup>2</sup>  
42: 10kg/cm<sup>2</sup>  
48: 150Lbs  
49: 300Lbs  
51: 600Lbs  
57: PN 10  
58: PN 16  
59: PN 25  
60: PN 40  
62: PN 0.6 Mpa  
63: PN 1.0 Mpa  
64: PN 1.6 Mpa  
65: PN 2.5 Mpa  
66: PN 4.0 Mpa

### ⑳ ㉑ Probe material

MA: SUS304  
MB: SUS316  
MC: SUS316L

### ㉒ ㉓ Coating material

00: None  
36: ETFE

### ㉔ Surface roughness

B: Ra≤1.5um  
C: Ra≤0.8um

### ㉕ ㉖ ㉗ ㉘ Probe length

Code	Probe length	Remarks
0054	54mm	Shared junction box-hidden plate type
0076	76mm	Shared junction box-thread type
0098	98mm	Shared junction box-hidden extension type
0120	120mm	Shared junction box-thread extension type
0099~3000	99~3000mm	Shared junction box-hidden plate lengthened type
0121~3000	121~3000mm	Shared junction box-thread lengthened type



# Global Network



## ■ Head Quarter

- Taiwan  
FineTek Co., Ltd. - Taipei Head Quarter  
No.16, Tzuchiang St., Tucheng Industrial Park  
New Taipei City 236, Taiwan  
TEL: 886-2-2269-6789  
FAX: 886-2-2268-6682  
EMAIL: info@fine-tek.com

## ■ North America

- California, U.S.  
Aplus Finetek Sensor Inc. - US Office  
355 S. Lemon Ave, Suite D  
Walnut, CA 91789  
TEL: 1 909 598 2488  
FAX: 1 909 598 3188  
EMAIL: info@aplusfine.com

## ■ Europe

- Germany  
FineTek GmbH - Germany Office  
Bei den Kämpen 26  
21220 Seevetal-Ramelsloh, Germany  
TEL: +49-(0)4185-8083-12  
FAX: +49-(0)4185-8083-80  
EMAIL: info@fine-tek.de

## ■ Asia

- China  
Fine automation Co., Ltd. - Shanghai Factory  
No.451 DuHui Rd, MinHang District, Shanghai,  
China 201109  
TEL: 86-21-6490-7260  
EMAIL: info.sh@fine-tek.com

- Singapore  
FineTek Pte Ltd. - Singapore Office  
37 Kaki Bukit Place, Level 4 Singapore 416215  
TEL: 65-6452-6340  
EMAIL: info.sg@fine-tek.com

- Indonesia  
PT. FineTek Automation Indonesia - Indonesia Office  
PERGUDANGAN TUNAS BITUNG  
JL. Raya Serang KM. 13,8, Blok C3 No. 12&15,  
Bitung Cikupa, Tangerang 15710  
TEL: 62 (021)-2958-1688  
EMAIL: info.id@fine-tek.com

- Müttec Instruments GmbH - Germany Office  
Bei den Kämpen 26  
21220 Seevetal-Ramelsloh, Germany  
TEL: +49-(0)4185-8083-0  
FAX: +49-(0)4185-8083-80  
EMAIL: muetec@muetec.de



Distributor: